

CATALOGUE

BRÜEL & KJÆR

TRANSDUCERS AND CONDITIONING

ISSUE 19

BRÜEL & KJÆR  
**TRANSDUCERS  
AND CONDITIONING**

# WELCOME

Welcome to the Brüel & Kjær Transducer Catalogue covering our full range of transducer-based solutions including:

- Microphones
- Accelerometers
- Preamplifiers
- Hydrophones
- Pressure transducers
- Conditioning amplifiers
- Force transducers
- Impact hammers
- Impedance heads
- Non-contact transducers
- Shakers and vibration exciters
- Electroacoustic products and systems
- Calibration products and systems
- Cables and accessories

The instruments are grouped and sorted into tables that list the most important specifications to make it easy for you to select the right product for your particular measurement needs. Within the microphone and accelerometer sections, you will also find pull-out tables to give you a complete overview and possibility to compare specifications across transducer families.

## The Whole Measurement Chain

Brüel & Kjær's advanced technological solutions and products cover the entire sound and vibration measurement chain, from a single transducer to complete turnkey systems.

### Products

Our market-leading product portfolio covers all of the components and tools required for high-quality measurement and analysis of sound and vibration. We are unique in the industry, allowing you to source all of your components from one supplier.

### Systems

Our products are designed to fit together and cooperate intelligently. This simplifies the process of creating systems optimized to solve your specific issues.

### Solutions

In certain instances, we supply both the systems and highly-skilled engineers to operate them and supply analysis results – meaning you can focus on your core business without worrying about operating and maintaining equipment.

### Services

We offer a full range of services for our products and systems including: installation, training, support, software updates, calibration, planned maintenance, repair and rental.

---

Brüel & Kjær is unique in the sound and vibration industry, producing all the elements for the most technologically advanced and complete sound and vibration solutions designed to save time and eliminate errors in the measurement process. In fact, Brüel & Kjær equipment and knowledge are behind thousands of achievements, from high-performance cars and smartphones to quieter airports, satellites and beyond – even helping with the Mars landings.

# CONTENTS

|   |           |
|---|-----------|
| <b>Brüel &amp; Kjær Transducers</b> .....                 | <b>1</b>  |
| Our Development and Production Process .....              | 2         |
| Our Implementation of TEDS .....                          | 3         |
| Ordering Transducers .....                                | 4         |
| Customization .....                                       | 4         |
| Microphone Firsts .....                                   | 5         |
| Accelerometer Firsts .....                                | 6         |
| <b>Transducer Application Examples</b> .....              | <b>7</b>  |
| Transducers for Aerospace and Defence Solutions.....      | 8         |
| Transducers for Automotive/Ground Vehicle Solutions ..... | 10        |
| Transducers for Telecom and Audio Solutions.....          | 12        |
| <b>Selecting the Right Microphone</b> .....               | <b>15</b> |
| <b>Microphones</b> .....                                  | <b>19</b> |
| Definition of Given Microphone Specifications.....        | 19        |
| Free-field Microphones.....                               | 19        |
| Diffuse-field Microphones.....                            | 21        |
| Pressure-field Microphones .....                          | 22        |
| Multi-field Microphone .....                              | 23        |
| Array Microphones.....                                    | 24        |
| Low-noise Microphones.....                                | 25        |
| Outdoor Microphones.....                                  | 26        |
| Laboratory Standard Microphones .....                     | 27        |
| <b>Special Acoustic Transducers</b> .....                 | <b>28</b> |
| Transducers for Sound Intensity Analysis .....            | 29        |
| Microphones for High-intensity Testing.....               | 31        |
| Hydrophones.....  | 32        |
| <b>Microphone Preamplifiers</b> .....                     | <b>34</b> |
| Brüel & Kjær Range of Microphone Preamplifiers .....      | 35        |
| <b>Microphone Calibration</b> .....                       | <b>37</b> |
| Calibrators .....   | 37        |
| Sound Intensity Calibrators .....                         | 38        |
| Adaptors for Calibration .....                            | 39        |
| <b>More About Microphones</b> .....                       | <b>40</b> |
| TEDS Microphones .....                                    | 40        |
| Microphone Verification and Calibration.....              | 42        |
| <b>Microphone and Preamplifier Extension Cables</b> ..... | <b>43</b> |
| Raw Cables .....  | 46        |
| More About Cables.....                                    | 47        |
| <b>Microphone Accessories</b> .....                       | <b>48</b> |
| Adaptors.....   | 48        |
| Corrector .....   | 48        |
| Windscreens.....  | 49        |
| Nose Cones.....   | 49        |
| Outdoor Protection .....                                  | 50        |
| Preamplifier Holders .....                                | 50        |
| Tripods.....  | 50        |
| Miscellaneous .....                                       | 51        |

|  |            |
|--|------------|
| <b>Selecting the Right Coupler .....</b>                           | <b>53</b>  |
| <b>Couplers .....</b>  | <b>56</b>  |
| Artificial Ears and Mastoids.....                                  | 56         |
| Ear and Mouth Simulators for Telephone Testing .....               | 60         |
| Head and Torso Simulators and Telephone Test Heads.....            | 63         |
| Acoustic Test Accessories.....                                     | 66         |
| <b>Selecting the Right Accelerometer .....</b>                     | <b>69</b>  |
| <b>Accelerometers .....</b>  | <b>72</b>  |
| Definitions of Given Accelerometer Specifications .....            | 72         |
| Uniaxial Piezoelectric Charge Accelerometers .....                 | 72         |
| Triaxial Piezoelectric Charge Accelerometers .....                 | 75         |
| Uniaxial CCLD Accelerometers .....                                 | 76         |
| Triaxial CCLD Accelerometers.....                                  | 82         |
| Amplified Piezoresistive Accelerometers .....                      | 84         |
| Connection Examples to Measurement and Analysis Devices .....      | 85         |
| <b>Non-contact Transducers .....</b>                               | <b>86</b>  |
| Non-contact Transducers for Speed, Velocity and Displacement ..... | 86         |
| <b>Force Transducers and Impact Hammers .....</b>                  | <b>87</b>  |
| Force Transducers .....  | 87         |
| Force Transducer/Impact Hammer .....                               | 88         |
| Impedance Heads .....  | 88         |
| Impact Hammers.....  | 89         |
| <b>Modal and Vibration Exciters .....</b>                          | <b>90</b>  |
| Modal and Vibration Test Solutions from Brüel & Kjær .....         | 90         |
| <b>Accelerometer Accessories .....</b>                             | <b>92</b>  |
| Clip Mounting.....   | 92         |
| Mounting Blocks, Brackets and Adaptors .....                       | 95         |
| Other Accessories.....   | 97         |
| <b>Accelerometer Mounting Solutions .....</b>                      | <b>103</b> |
| Mounting Considerations.....                                       | 103        |
| Mounting of Type 4326-A-001 .....                                  | 104        |
| <b>Accelerometer Cables .....</b>                                  | <b>105</b> |
| Brüel & Kjær Cables.....   | 105        |
| Coaxial Cable Assemblies for Uniaxial Accelerometers.....          | 106        |
| Coaxial Cable Assemblies for Triaxial Accelerometers .....         | 110        |
| Cable Assemblies for Industrial and Monitoring Applications .....  | 112        |
| Cable Accessories .....  | 114        |
| Raw Cables .....   | 115        |
| <b>Accelerometer Calibration .....</b>                             | <b>119</b> |
| Reference Accelerometers .....                                     | 119        |
| Calibrators and Calibration Systems .....                          | 120        |
| Vibration and Shock Calibration Exciters .....                     | 121        |
| Calibration Accessories .....                                      | 121        |
| <b>Signal Conditioning .....</b>                                   | <b>123</b> |
| Multi-pin Signal Conditioners for Microphones .....                | 123        |
| CCLD Signal Conditioners for Microphones and Accelerometers .....  | 124        |
| Charge Signal Conditioners for Accelerometers.....                 | 126        |
| What are the Benefits of Signal Conditioning? .....                | 128        |

|  |            |
|--|------------|
| <b>Calibration Systems .....</b>                           | <b>131</b> |
| Primary Calibration Systems .....                          | 131        |
| Secondary Calibration Systems .....                        | 132        |
| <b>Brüel &amp; Kjær Service .....</b>                      | <b>133</b> |
| Brüel & Kjær Calibration and Repair Services .....         | 134        |
| Calibration of Reference Equipment .....                   | 134        |
| Accredited Calibration .....                               | 134        |
| Traceable Calibration .....                                | 134        |
| Regular Calibration .....                                  | 134        |
| Service Agreements .....                                   | 135        |
| Rentals .....  | 135        |
| Learn More .....   | 135        |
| <b>Glossary of Terms .....</b>                             | <b>137</b> |
| <b>Compliance with Standards .....</b>                     | <b>143</b> |
| General Compliance .....                                   | 143        |
| Relevant Microphone Standards .....                        | 143        |
| <b>Dimensions .....</b>                                    | <b>144</b> |
| Microphone Dimensions .....                                | 144        |
| Accelerometer Dimensions .....                             | 147        |
| <b>Microphone Comparison Table .....</b>                   | <b>153</b> |
| <b>Charge Accelerometer Comparison Tables .....</b>        | <b>155</b> |
| <b>CCLD Accelerometer Comparison Tables .....</b>          | <b>157</b> |
| <b>Piezoresistive Accelerometer Comparison Table .....</b> | <b>163</b> |
| <b>Index .....</b>   | <b>165</b> |



# BRÜEL & KJÆR TRANSDUCERS

Transducers have been a core part of Brüel & Kjær's business for more than 70 years. The quality of our transducers is world-renowned and is the result of our unique experience and knowledge, backed up by meticulous testing and quality control, which ensures that you get the performance and durability you expect.

But Brüel & Kjær goes beyond transducers. We are unique in the industry, producing all of the elements for complete sound and vibration test systems. Our goal is to create the most technologically advanced solutions, built to the highest quality and designed to save time and eliminate errors in the measurement process. We have an unequalled product range, but our real advantage lies within our ability to supply complete solutions that

are targeted at optimizing our customers' work processes, to provide rapid, reliable results.

## Creative Answers to Complex Problems

Brüel & Kjær is founded on good ideas, hard work and entrepreneurship, and it is this passion for innovation and high quality that drives the company forward. Over the past couple of years, our innovations have strongly focused on helping you work faster, smarter and easier by supporting the entire measurement and analysis process: from transducer to data acquisition, analyses and after-sales care and services.

Transducer-based innovations that support the entire measurement chain

### Data Matrices



Scan the data matrix code on your transducer to access the instrument's unique Web page for:

- Specifications
- Technical documentation
- Specific calibration data
- Information about Smart Setup


### Transducer Smart Setup



Download the free app to your iPhone to simplify and speed up test setups.

- If you use it with the data matrix codes, setup is even easier:
- Quickly catalogue transducer information, node IDs, component IDs and DOF directions
  - Create and edit transducer test setups
  - Access resource information as you set up the test
  - Transfer setups to PULSE Reflex

### Accelerometer Mounting Check

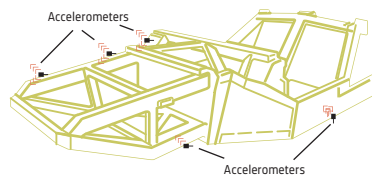

Check the health of your accelerometer and how well it is mounted on the test structure

- To be implemented in PULSE Reflex measurement applications
- Take reference measurements in one click
- Run a mounting check to verify if an accelerometer is loosely or correctly mounted

### Online Calibration Data



Immediately gain access, anytime and anywhere, to calibration data for all your transducers in one location:

- Overview of hardware assets
- Calibration certificates
- Calibration charts
- Correction curves
- Order new calibration

THESE SOLUTIONS CAN HELP YOU:




During test setup



During transducer mounting



During front-end setup and calibration



During measurement and real-time analysis




During post-processing and reporting

# Our Development and Production Process

## Development from the Beginning

We determine the specification of a new transducer based on input from our customers, their requirements, and our own product development plans. Using modern simulation and analytical tools, such as finite element models (FEM), we can, early in the process, begin to optimize the performance of the new design and reduce development time so the first units reach customers faster.

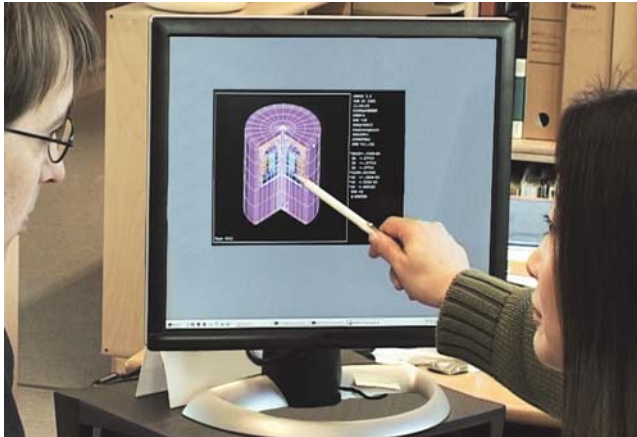

After verifying the model, we construct several prototypes. As thorough testing ensures long-term stability, each prototype is subjected to the following tests – in addition to those against the mathematical model:

- Environmental testing – heat, humidity, etc.
- EMC (electromagnetic compatibility)
- Base strain
- Measurement accuracy
- Destructive testing

Ongoing testing, verification, and artificial aging ensure that the quality of the manufactured product is always maintained and that the excellent accuracy that Brüel & Kjær transducers are known for, is ensured.

## Production: Test, Test and Test Again

Every Brüel & Kjær transducer is thoroughly tested during its production to ensure that its performance is within the specified parameters. Extremely high standards are met in our production quality and this is reflected in our status as an ISO 9001 and EN 9100 certified company. Depending on the type, a transducer can be subjected to between five and ten separate test procedures.



Our extensive in-house test equipment gives our engineers the tools to quickly identify the root cause, fix the underlying problem and resume normal production to make timely delivery with the quality you expect from Brüel & Kjær.

## Calibration Before Shipping

An individual calibration is performed on each transducer during production in our own calibration laboratory using a calibration technique based on FFT analysis, which provides the resolution needed to detect certain types of problems. Our unique status as the primary Danish standards lab reduces our traceability steps as well the uncertainty in our calibrations.

## Sharing Our Knowledge

The information we gather during final testing is always available to you via our detailed product datasheets. Each datasheet includes the individual transducer's sensitivity to external inputs as well as other specifications.

If you need more information, a support engineer is always available by phone, on the Web or in person to answer your question and share best practices. Additionally, we have a wealth of information in our transducer handbooks, application notes and technical reviews, all available at [www.bksv.com](http://www.bksv.com).



# Our Implementation of TEDS

A wide range of TEDS (transducer electronic data sheet) transducers are available from Brüel & Kjær. TEDS is standardized by the Institute of Electrical and Electronics Engineers (IEEE) and is supported by many front ends and conditioning amplifiers including Brüel & Kjær's PULSE LAN-XI data acquisition, VC-LAN vibration controllers, 16-channel Conditioning Amplifier Type 2694, the NEXUS line of conditioning amplifiers, and many more.

TEDS offers a number of benefits:

- Plug and play facilities
- Type, S/N, sensitivity and more read directly from the transducer
- Significantly reduced setup time
- Practical elimination of cable routing errors

## How Does TEDS Work?

Basically the chip containing the TEDS data and TEDS interface is built into the transducer. TEDS data is updated during the measurement system's boot sequence or whenever "update TEDS" is activated.

TEDS data can be transmitted to the front-end in two different ways:


- Class I TEDS: On the same wire as the analogue signal
- Class II TEDS: Via a separate wire

Class I is always used with CCLD transducers since TEDS can be implemented using the traditional coaxial cable.


For measuring microphones, either Class I or Class II can be used depending on the preamplifier, where the actual TEDS chip is located. When Class II is used, pin 5 (often denoted as "No connection" in early product data) is used to transmit the TEDS data. This is important when using extension cables as some older cables might really not have pin 5 connected, which will break the TEDS chain.

The TEDS microphone and preamplifier bundles are assembled under controlled conditions, which means that special precautions are taken to avoid dust and contamination entering the boundary between microphone cartridge and the preamplifier. This is important in order to maintain low noise even at high temperatures and high relative humidity. It is also important that when TEDS Class I or II is used with microphones, that the microphone stays with the preamplifier it was programmed with since the preamplifier is where the TEDS information of the specific microphone is actually stored. To avoid this error, many Brüel & Kjær microphones are permanently connected to their preamplifiers.

Example of Class I TEDS transducer as used in a CCLD TEDS microphone

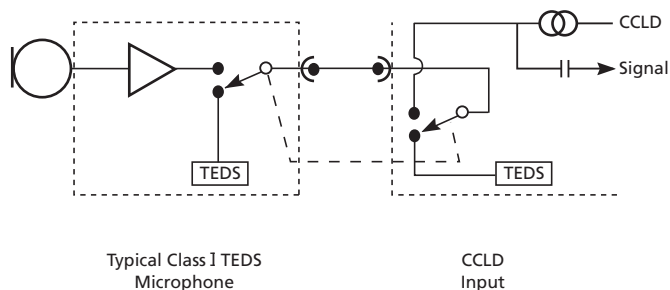

Example of Class II TEDS as used in a TEDS microphone

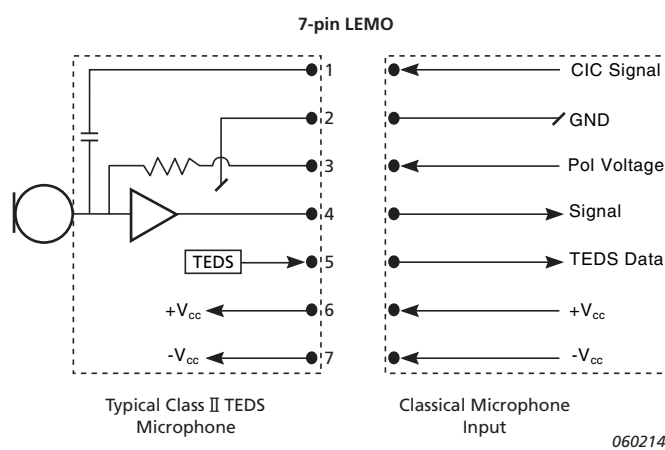

## The IEEE 1451.4 Standard

Currently the version programmed and the actual chip used to store the transducer's TEDS information is in transition. Most sound and vibration transducers (Brüel & Kjær as well as other manufacturers) conform to IEEE P1451.4 V.0.9 which is actually a standard proposal and differs slightly from the final standard IEEE 1451 V.1.0.

Re-mapping to IEEE 1451 V.1.0 is available for all Brüel & Kjær transducers at time of order or as part of after-sales service. Relevant Brüel & Kjær hardware (PULSE, NEXUS, etc.) support both the proposed and final version of the standard, and in many applications the user will not notice a difference between the two standards. The major difference between the proposed and final version concerns the memory map. In the proposed version, all data is in a R/W area of the memory, while in V.1.0 some permanent data (manufacturer, etc.) has been moved to a write once area of the memory. This leaves more space in the "user area" of the memory.

Currently, Array Microphone Types 4957, 4958 and 4959 are supplied with TEDS according to the final revision IEEE 1451.4 V.1.0.

## TEDS Templates

The TEDS template defines the memory mapping of the TEDS chip and hence the “understanding” between transducer and front end.

A number of TEDS templates have been standardized by the IEEE and in addition to this, a number of non-standard vendor specific

templates exist. The different TEDS templates are differentiated by different ID numbers.

See [TEDS Microphones](#) for a listing of the templates used with Brüel & Kjær microphones and preamplifiers.

## Ordering Transducers

To order from Brüel & Kjær, you just need to know an item’s order number. For transducers and signal conditioners, these will be a number preceded by the word “Type”. For example:

- 1/2-inch Prepolarized Microphone Type 4188
- Miniature Triaxial CCLD Accelerometer Type 4520
- Charge to CCLD Converter Type 2647

A transducer may have several models that vary from each other (different sensitivity, interface or accessories). This is denoted by a letter after the number, by a dash (-) and three alphanumeric characters, or a combination of a letter and then three alphanumeric characters, for example:

- Charge to CCLD Converter Types 2647-A, 2647-B and 2647-C
- Miniature Triaxial CCLD Accelerometer Types 4520-001 and 4502-004
- 1/2-inch Free-field Microphone including High-temperature Preamplifier Type 1706 with TEDS Type 4189-H-041

There are some general rules within transducer families relating to the letter:

- For CCLD accelerometers, a “B” in the type number indicates that the transducer contains TEDS
- For microphones:
  - “A” or “H” in the type number indicates a CCLD preamplifier with TEDS
  - “B”, “C”, or “L” in the type number indicates a 7-pin LEMO preamplifier with TEDS

For accessories, the order number is an alphanumeric code starting with two letters. For example:

- AO-xxxx: Extension Cables
- UA-xxxx: Adaptor and Mounting Clips
- YM-xxxx: Adhesive Mounting Pads
- YJ-xxxx: Glue and Adhesives
- QS-xxxx: Glue and Adhesives

















Each transducer has a product data sheet (PD) with ordering information – including all required accessories. You can find transducer PDs on [www.bksv.com](http://www.bksv.com).

## Customization

















Despite the large number of transducers available in Brüel & Kjær’s standard selection, special measurement situations can occur requiring a transducer that cannot be met by our standard product range. In order to effectively meet our customers’ needs, we offer customized products.

We already have a broad portfolio of non-standard products developed for special applications. For further details on what Brüel & Kjær can offer for special applications, please contact your local representative.

# Microphone Firsts

|      |                          |   |  |
|------|--------------------------|---|--|
| 1956 | Type 4131                |    | World's first volume-produced measurement microphones, Types 4131 (free-field) and 4132 (pressure-field), developed, amongst others, by Dr. Per V. Brüel   |
| 1967 | Type 4138                |    | World's first 1/8" measuring microphone. Due to on-going product improvements, this type is still available  |
| 1975 | Type 4160                |    | Brüel & Kjær is requested to produce a replacement for the Western Electric WE 640 AA Reference Microphone. As a result, Type 4160 and later the 1/2" Type 4180 were introduced (still the world de facto acoustical standards)          |
| 1980 | Type 4155                |    | Brüel & Kjær launches the world's first high-stability, measurement grade, electret microphones  |
| 1984 | Type 4179                |    | Using advanced modelling and clever design, this microphone has a noise floor of -2.5 dB(A), still unbeaten after nearly 30 years!   |
| 1987 | Type 4182                |    | Brüel & Kjær introduces probe microphone for measurement in extremely confined spaces and up to more than 600 °C   |
| 1993 | Type 4188                |   | Falcon series is introduced. Featuring stainless steel, press-fitted diaphragms, these microphones result in a step change in microphone technology  |
| 1994 | Type 4189                |  | Falcon series at peak performance. Type 4189 is probably the world's most popular 1/2" free-field microphone   |
| 2000 | Type 4297                |  | The world's only one-unit Sound Intensity Calibrator enables calibration without dismantling the probe   |
| 2003 | Type 4948                |  | Surface Microphone – a Brüel&Kjær first: an "all titanium" sensor originally developed for aerospace applications  |
| 2004 | Type 4949                |  | Surface Microphones now also find their way into the automotive industry, where they break new frontiers in wind-tunnel testing  |
| 2005 | Type 4952                |  | World's first outdoor microphone where all parts exposed to the weather are made from polymer materials  |
| 2006 | Type 4955                |  | Continuing the "all titanium" concept, this TEDS microphone has 1.1 V/Pa sensitivity and a typical noise floor of 5.5 dB   |
| 2009 | Type 4961                |  | Multi-field Microphone – world's first 1/4" measurement microphone that guarantees accurate and error-free measurements in both free and diffuse fields and at any angle   |
| 2012 | Type 1706                |  | World's first microphone preamplifier that can handle temperatures up to +125 °C/+257 °F   |
| 2015 | Calibration in the Cloud |  | Access calibration data anytime. Calibration data is stored in the cloud for every transducer serviced at a Brüel & Kjær calibration laboratory. Furthermore, correction files for each individual microphone are accessible via the Web |

# Accelerometer Firsts

|      |                                 |   |   |
|------|---------------------------------|---|---|
| 1943 | Type 4301                       |    | World's first commercial piezoelectric accelerometer made from Rochelle salt crystals and developed by Dr. Per V. Brüel   |
| 1957 | Type 4310                       |    | Brüel & Kjær's first lead zirconate titanate (PZT) accelerometer  |
| 1971 | Type 8305                       |    | Brüel & Kjær's standard reference accelerometer based on an inverted, centre-mounted compression design with quartz crystal piezoelectric element, ensured a high degree of accuracy for calibration            |
| 1974 | Type 4366                       |    | This all-titanium accelerometer was the first based on Brüel & Kjær's patented DeltaShear™ design. Still in use today, the construction is regarded as one of the all-time, classic accelerometer constructions |
| 1977 | Type 4374                       |    | The first miniature accelerometer with a PlanarShear design – extending the frequency range of Brüel & Kjær Shear design  |
| 1985 | Type 4390                       |    | World's first accelerometer with constant voltage line-drive (CVLD) built-in preamplifier   |
| 1985 | Type 8317                       |   | Brüel & Kjær's first and highly reliable industrial DeltaShear accelerometer suitable for permanent vibration monitoring in potentially explosive environments  |
| 1996 | Types 4507 and 4508             |  | World's first dedicated modal shear accelerometer family  |
| 1998 | Type 4506                       |  | The world's first OrthoShear™ triaxial accelerometer – one seismic mass for optimized noise floor and orthogonality   |
| 1999 | Type 4507-B                     |  | Another world first – an accelerometer with integrated TEDS (transducer electronic data sheet)  |
| 2005 | Type 4524-B                     |  | The first miniature triaxial accelerometer with integrated TEDS   |
| 2008 | Type 4526                       |  | A ThetaShear™, CCLD accelerometer for applications up to 180 °C (356 °F) – the highest temperature for an accelerometer with built-in preamplifier in the industry  |
| 2012 | Type 8347-C                     |  | Wide temperature range (–321 to +900 °F (–196 to +482 °C)) industrial accelerometer with superior temperature transient performance from Shear design   |
| 2012 | Type 4527                       |  | This universal CCLD triaxial accelerometer never sits still on the shelf, and has the widest temperature (up to 180 °C (356 °F)) and dynamic range  |
| 2015 | Type 4527-C                     |  | The first triaxial charge accelerometer with one connector  |
| 2015 | Types 4535-B, 4524-B and 4508-B |  | Some of the first accelerometers with data matrix. Used with Transducer Smart Setup for seamless transfer of transducer data to PULSE Reflex™   |

# TRANSDUCER APPLICATION EXAMPLES

Brüel & Kjær supplies integrated solutions for the measurement and analysis of sound and vibration. As a world-leader in sound and vibration measurement and analysis, we use our core competencies to help industries and governments solve sound and vibration challenges so you can concentrate on your primary task: efficiency in commerce and administration.

## The Complete Solution

As the sound and vibration challenges facing industry are diverse – from traffic or airport noise, vibration in a car engine, evaluation of building acoustics, cabin comfort in a passenger aeroplane to production quality control or wind turbine noise, Brüel & Kjær has over the years developed creative and technically advanced solutions to innumerable customer problems. Some of the work we have done with customers is published as [case studies](#).

We provide the whole measurement chain: transducers; calibration; data acquisition and measurement instruments; measurement, analysis and reporting software; and service and support. From this wide range of individual products, integrated systems and customized turnkey solutions, the test engineer can find the right tools for comprehensive evaluations, complex test setups, outdoor field measurements or simple pass/fail assessments.



## Transducers in the Measurement Chain

Transducers are the vital first link in your measurement chain. As they stand on the front line and provide you with the raw data you need, it is critically important that they are trustworthy.

Brüel & Kjær has always set the standard that others have tried to follow and offers the industry's largest selection of transducers, to help you make the most accurate measurements possible.

---

In the following pages, you can learn about how Brüel & Kjær's wide range of transducers can be applied in fields such as Aerospace and Defence, Automotive/Ground Vehicles and Telecom/Audio – among the many other fields we serve

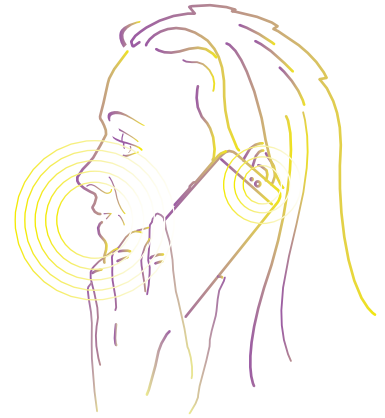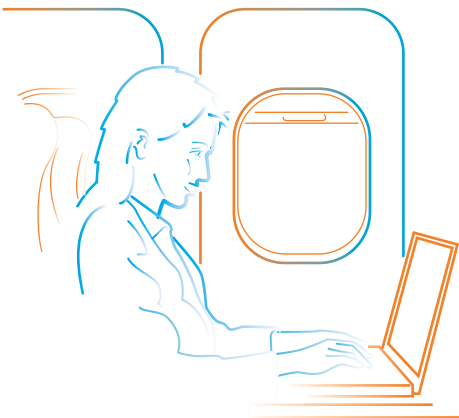

# Transducers for Aerospace and Defence Solutions



## Acoustic Test Suite

Whether your interest is exterior or interior noise, our acoustic test suite provides data acquisition and assessment systems to combat your noise problems by optimizing noise performance, improving sound quality, and ensuring compliance with environmental legislation. Solutions include:

- Noise source mapping and location
- Wind tunnel and flight testing
- Engine and aircraft certification
- Acoustic material testing
- Cabin comfort and occupational health
- Ramp noise and sonic boom
- Underwater acoustics
- Hull monitoring
- Acoustic stealth and noise signature management

Some examples of transducers used in aerospace and defence solutions



Ever-shortening design and development time frames of modern aerospace and space programs demand 'right-first-time' engineering. The aerospace sector is seriously contemplating aviation efficiency and environmental issues, whilst defence industries have the added concerns of ensuring reliability and high performance of military systems, often under extreme conditions.

Recognizing that high-quality, goal-focused, time- and cost-efficient testing is critical to meeting program milestones, Brüel & Kjær addresses today's engineering needs by providing quality sensor solutions.

Whether turnkey solutions or dual-use application needs, Brüel & Kjær provides the aerospace and defence sectors with transducers that comply with common industry standards:

- BS EN ISO 9001:2008
- EN 9100:2009
- AS 9100 Rev. C

Brüel & Kjær's quality management system is applicable to: development, production, sales and service of customer-specific transducers.

## Environmental Test Suite

Reproducing realistic operational conditions in the laboratory is essential for qualifying the real-life integrity of structures to ensure durability. Whether for billion-dollar satellites, launchers, aircraft, instruments or structures, our comprehensive vibration test solutions provide a wealth of environmental test systems. Solutions include:

- Durability and acoustic fatigue testing
- Classical and pyro shock
- Sine, random, sine-on-random, random-on-random testing
- Shock response spectrum
- Kurtosion
- Field data replication

## Rotating Test Suite



Vibration analysis of rotating machinery provides valuable information on engine health, reliability and performance. From R&D and production test cell applications to on-ground maintenance, our vibration measurement and analysis systems provide you with powerful machine analysis tools. Solutions include:

- Vibration analysis, monitoring and diagnostics
- Vibration data acquisition and analysis in engine test cells
- On-ground vibration check of aircraft engines
- Order analysis and autotracking
- Balancing and trim balancing
- HUMS transducers

## Structural Test Suite

Structural dynamics testing is vital to understand and optimize the inherent dynamic properties of structures, to ensure reliable and safe operation. Our structural test suite offers complete systems for controlled excitation testing, real-life operational testing and test-FEA integration – from the smallest components to the largest assembled structures. Solutions include:

- Operating Deflection Shapes analysis
- Operational Modal Analysis
- Classical Modal Analysis
- Normal mode testing
- Structural dynamics modifications
- Model correlation and updating

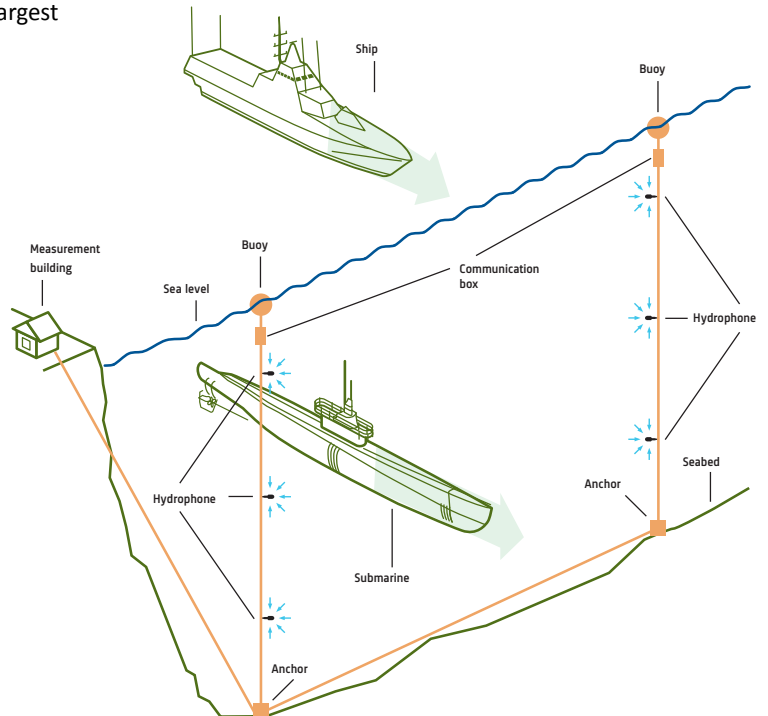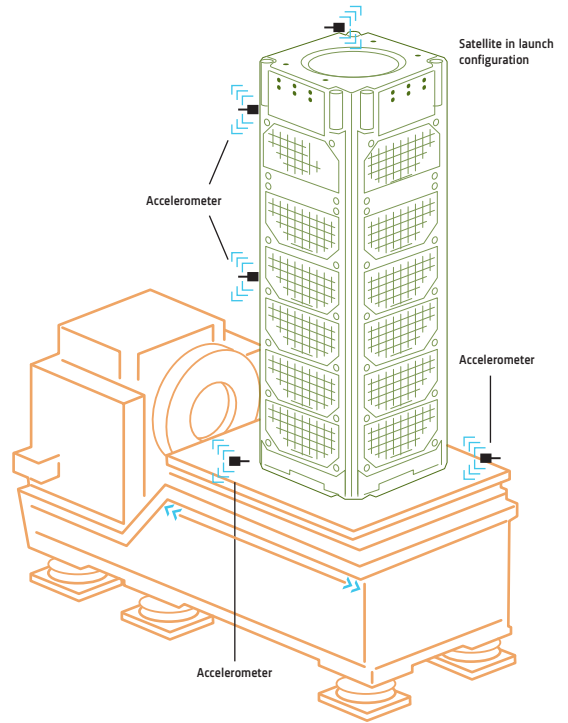

# Transducers for Automotive/Ground Vehicle Solutions



## Interior NVH

Time Domain SPC enables engineers to calculate, listen to, and modify individual contributions to the vehicle occupants (both airborne and structure-borne), and assists with design and validation of programme NVH targets.

## Sound Engineering

The NVH Simulator Suite auralises NVH data with advanced sound-simulation techniques, allowing you to efficiently communicate NVH targets to non-experts even before physical prototypes are available. The On-road Simulator allows evaluation of virtual vehicles, and even benchmarking of competitive vehicles under real driving conditions.

Some examples of transducers used in automotive and ground vehicle solutions



Passenger vehicles such as cars, trucks, motorcycles, buses and trains continuously need to be more exciting and pleasant, while becoming safer and emitting less noise. Thanks to technology, engines are quieter and vehicle bodies are better insulated. For the most part, cars are only noisy at high speeds or during acceleration when the engine roars into life. As the speed increases, the noise mix produced by the tyres, chassis and wind intensifies. For some manufacturers, the amount and character of this phenomenon is desirable, for others, less so.

Locating and identifying noise sources, creating and correcting designs, as well as ensuring company, industry and legislative standards are key to achieving the desired results. This makes noise, vibration and harshness (NVH) testing incredibly necessary for vehicle manufacturers to establish and maintain a competitive advantage.

Brüel & Kjær's expert knowledge of the industry, combined with extensive experience of customer-driven projects, allows us to cover the whole vehicle NVH development process. Our solutions range from vehicle NVH simulators for target setting, to spherical beamforming for 360-degree noise mapping.




## Powertrain Testing

**Brüel & Kjær provides tools for efficient powertrain testing:**

- Very high-temperature triaxial accelerometers
- Crankshaft angle analysis software
- Systems for measuring sound power versus RPM
- Holography systems for locating noise sources and measuring partial sound power versus RPM and crank angle
- Wide band noise source identification systems customized to fit engine test cells
- NVH simulators to evaluate powertrain components or complete powertrains in full vehicle context

**Hybrid-electrical and electrical vehicles:**

- Switching noise analysis, transient analysis, high-frequency beamforming, multi-field microphone with very low magnetic sensitivity for measuring in unknown sound fields
- NVH simulator for exterior vehicle noise
- Vibration testing of large batteries

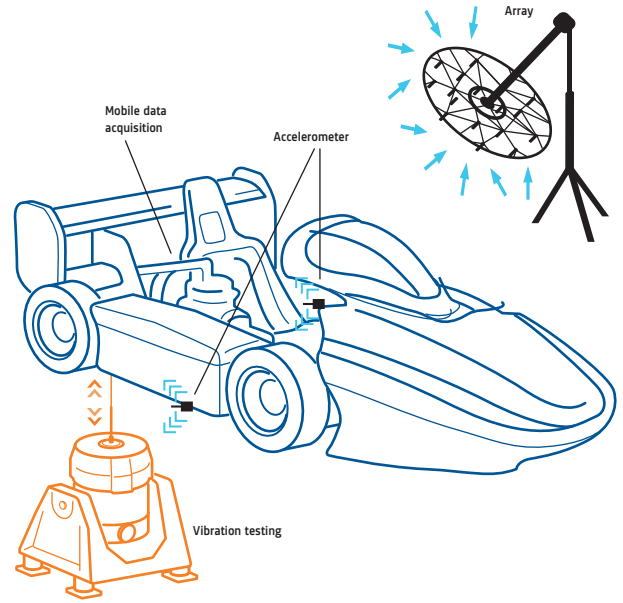

## Structural Analysis

The Structural Dynamics Suite helps improve the dynamic behaviour of any structure. It includes Operating Deflection Shapes analysis covering the full set of methods (frequency, order, time), Classical Modal Analysis with a wide range of powerful curve-fitters, and Operational Modal Analysis.

## Squeak and Rattle

Our unique equipment range ensures that automotive components and interiors are durable and free from noise, and supports industry-standard QA practices for squeak and rattle vibration testing. Solutions include:


- Low-noise shaker systems
- Sound quality analysis software
- Array-based systems for quick localization of noise sources

## Wind Tunnel Testing

Surface microphones on the exterior of a vehicle measure the pressure fluctuations at different positions, whilst beamformers placed outside the main airflow pinpoint the location of noise sources and quantify the relative noise contributions. When combined with a spherical beamformer inside the vehicle, a detailed noise cause-effect relationship is achieved using minimal testing time.

## Exterior Noise

As community regulations put ever tighter restrictions on noise emission, our Vehicle Pass-by solutions offer complete support to ensure compliance with the latest standards. Adding moving-source beamforming enables noise source localization and troubleshooting during measurements. Our Indoor Simulated Pass-by Noise System enables efficient comparison of design alternatives.

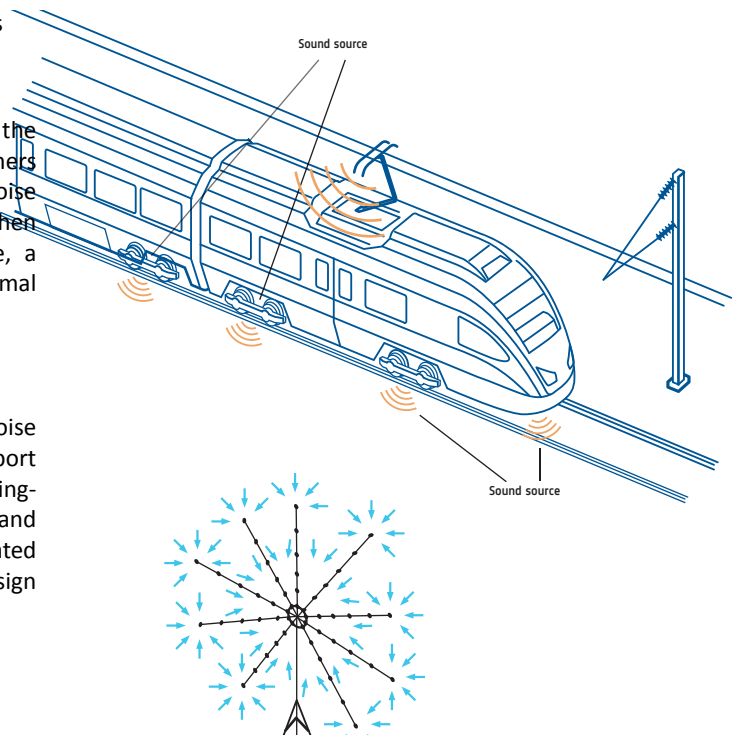


# Transducers for Telecom and Audio Solutions

## Electroacoustic Test Systems

Our experience of providing quality acoustic solutions gives us a solid background when developing new systems for emerging technologies and markets. Our range of dedicated electroacoustic test systems is eminently suitable for acoustic design, benchmarking, prequalification and conformance testing of mobile phones, tablets, VoIP phones, headsets, loudspeakers, etc.

The test system supports the entire workflow required by typical test procedures. This covers system calibration and verification, various acoustic measurement suites for evaluating the performance of devices under testing, and reporting. Tools for easy comparison of measurements as well as tools to hear and edit recordings are also available.

Some examples of transducers used in telecom and audio solutions



Vibration testing of telephone



4185



Anechoic test chamber



Telephone test head



4195



1704



4128-C

Manufacturers of electroacoustic equipment such as loudspeakers, microphones, telephones, headsets, hearing aids and hydrophones deliver successively high-quality acoustical designs by continuously innovating their products and processes.

Acoustic performance has become increasingly important as users demand high-quality audio in every situation, whether reproducing sound or transmitting speech. Measuring and documenting the acoustic performance, therefore, is a key element in the product improvement process, during both its development and manufacture.

Brüel & Kjær has a long tradition of close connections with the fields of telecommunications and audio, pioneering many methods that are now standard practice all over the world.

Today, based on our accumulated knowledge and experience, we offer a variety of electroacoustic test systems, audio analyzers, and transducers for electroacoustic applications.

## Audio Analyzers

With PULSE being one of the most commonly used platforms for conducting acoustic measurement, it forms a solid foundation for our audio analyzers. These offer a variety of analysis methods, covering traditional sine testing (using SSR and TSR), spectrum analysis (using FFT and CPB) for testing using real speech, and perception-based test methods.



In combination with the dedicated hardware, this supports the audio engineer in achieving the acoustic design goals setup. Besides its measurement and analysis capabilities, PULSE also offers tools to automate test procedures, as well as reporting and data management tools for easy archiving and retrieving of measurement data and related information.

## Transducers

To guarantee reliable acoustic measurements, most national standards laboratories use Brüel & Kjær reference microphones. Consequently, most acoustical measurement in the world ultimately refers back to Brüel & Kjær products.

A comprehensive portfolio of transducers supports standardized testing of telephones, hearing aids, headphones, headsets, ear phones, loudspeakers, receivers and many other applications.

Our range of acoustical transducers includes ear simulators, mouth simulators and microphones. All transducers supplied by Brüel & Kjær contain information about their actual sensitivity. When the transducer is connected to the analyzer this information is automatically transferred to the analyzer, ensuring that the proper setting is always used for the specific measurement task.

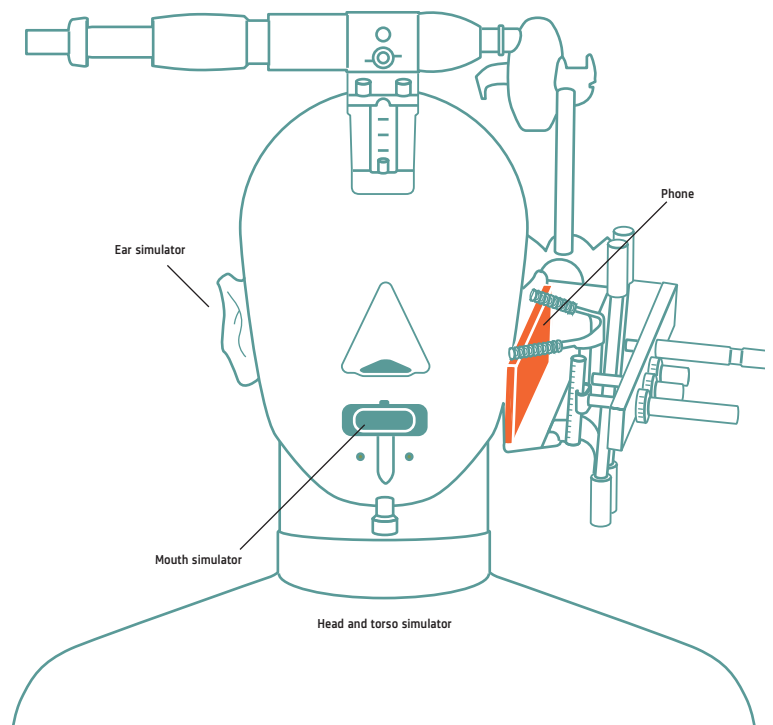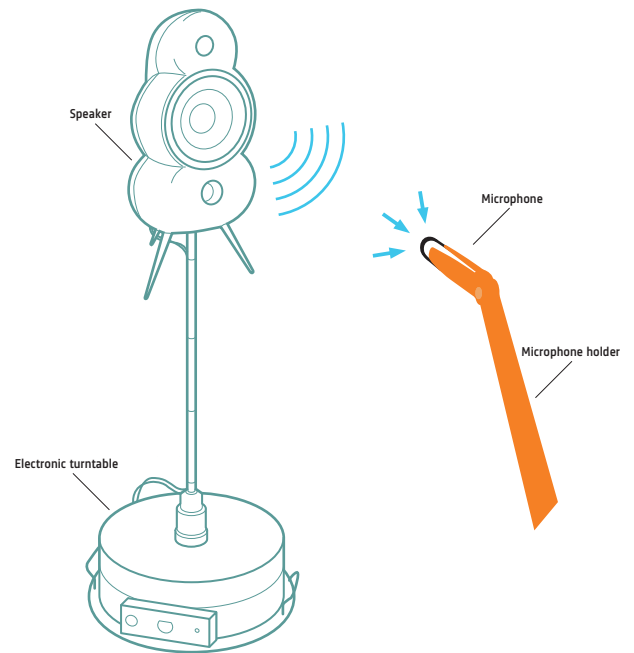



# SELECTING THE RIGHT MICROPHONE

Brüel & Kjær offers a broad spectrum of solutions that respond to varying needs and applications. This adaptability is evident in the range of transducers designed for specific environments, industries, tasks and conditions, as well as general purpose instruments that provide a wide operational range.

Selecting the best transducer for a given measurement task can be understandably overwhelming. Our interactive transducer selection guide on [www.bksv.com](http://www.bksv.com) can be a big help to quickly narrow your choices. Alternatively, you can use the Microphone Matrix below to help you select the right microphone to fit your needs.

Condenser microphones:




- are either externally polarized or prepolarized
- come in different sizes: 1-inch, 1/2-inch, 1/4-inch, or 1/8-inch
- are optimized for either free-, pressure-, or diffuse-field

For a quick overview, product types are listed according to these classifications. Microphones that do not directly match one of these classes are denoted as “Special Microphones”.

1/8-inch microphones are pressure types. Due to their small size, the free-field and pressure response are approximately the same up to quite high frequencies (for example, the free-field correction is less than 1 dB at 15 kHz).

For an overview of key specifications for all of our standard microphones, see the comparison table on [page 153](#).

The Microphone Matrix

| Type of Microphone  |                | Type 1/8-inch | 1/4-inch                           | 1/2-inch                             | 1-inch       | Polarization         |
|---|----------------|---------------|------------------------------------|--------------------------------------|--------------|----------------------|
|    | Free-field     |               | 4954                               | 4137<br>4176<br>4188<br>4189<br>4950 |              | Prepolarized         |
|   |                |               | 4939                               | 4190<br>4191                         | 4145         | Externally polarized |
|  | Pressure-field |               | 4944                               | 4947<br>4948<br>4949<br>4956         |              | Prepolarized         |
|   |                | 4138          | 4938<br>4941                       | 4192                                 | 4144         | Externally polarized |
|   | Diffuse-field  |               |                                    | 4942                                 |              | Prepolarized         |
|   |                |               |                                    | 4943                                 |              | Externally polarized |
|   | Special        |               | 4961<br>4957,<br>4958              | 4948<br>4949                         |              | Prepolarized         |
|   |                |               | 4187<br>4938-WH-1418<br>4938-W-001 | 4180<br>4193<br>4955                 | 4160<br>4179 | Externally polarized |

## For Selection Consider the Following

### Which kind of input module – classical or CCLD?

CCLD (including DeltaTron and IEPE) can only work with prepolarized types; classical input works with both prepolarized and externally polarized cartridges. For more information about CCLD and classical input see the preamplifier section. For portable instruments and where high humidity is present, prepolarized microphones are preferred. For more general use in the laboratory or where high temperature is present, the use of external polarized microphones is recommended.

### Does the microphone have to fulfil any specific standard?

If this is the case, see [Microphone Standards](#) under “Compliance with Standards”.

Frequency range and maximum sound pressure level (SPL) will often determine which microphone size to use.

Generally a smaller microphone has a broader frequency range and a lower sensitivity. For more details, see [Maximum Limits and Dynamic Range](#).

### For which sound field should the microphone be optimized\*?

For measurements made away from reflecting surfaces, for example, when making outdoor measurements, or in acoustically well-damped indoor environments, a free-field microphone is best. But for measurements made in small closed couplers, or close to hard surfaces, a pressure-field microphone is best. For measurements in enclosed areas where reverberation is likely, microphones optimized for diffuse-field (random-incidence) response are best. In some cases, pressure type microphones can also be found to have sufficiently flat random-incidence response. This is because the random-incidence response of a pressure-field microphone is much flatter across the frequency range than that of a microphone optimized for flat free-field response. A special case is the measurement of surface pressure where surface microphones would be the obvious choice.

### Special application or condition?

For special applications, a special microphone can be selected, for example, laboratory standard microphones, outdoor microphones, array microphones, infrasound microphones, etc. If the microphone is to be used in extreme temperature conditions, see [Effects of Temperature](#) for guidance.

## Maximum Limits and Dynamic Range

**Inherent Noise:** Even if a microphone is placed in a “totally quiet” room there will be some Brownian movement of the microphone back-plate and diaphragm. These movements correspond to very small pressure fluctuations and will cause changes in the cartridge capacity which – if a polarization voltage is present – cause an output voltage from the microphone. The SPL corresponding to this output voltage is defined as the inherent noise of the microphone cartridge.

**3% Distortion Limit:** Even though the condenser microphone is highly linear, at a certain pressure there will be some distortion of the output signal. At Brüel & Kjær we specify the 3% distortion limit as a recommended maximum limit for accurate measurements.

**10% Distortion Limit:** Increasing the sound pressure behind the 3% distortion limit will result in a further increase in distortion. In some cases, a 10% distortion limit is specified. In many practical cases, the 10% distortion limit is determined by the preamplifier.

**Maximum SPL:** Due to mechanical forces acting on the cartridge there is a maximum pressure level which should never be exceeded or the long-term stability can be influenced and/or mechanical damage can happen. The corresponding sound pressure level is called the maximum SPL.

**Dynamic Range of Microphone/Preamplifier Combinations:** In a practical application, the lower limit of dynamic range is determined by the combined noise from the cartridge and the preamplifier. The upper SPL limit will often be determined by the output voltage swing from the preamplifier. This is especially

important when using CCLD preamplifiers, since here the maximum voltage is limited by the input stage compliance (open-circuit) voltage.

A compliance voltage of, say, 28 V as used in many front ends will limit the maximum voltage swing to around  $14 V_{pp}$  and this may determine the real maximum limit of a cartridge/preamplifier combination.

Brüel & Kjær defines the dynamic range as the range from the noise floor in dBA to the SPL resulting in a 3% distortion limit with a given cartridge/preamplifier combination, and nominal compliance voltage where relevant.

The table below shows the maximum SPL as determined by the preamplifier. However, it must be mentioned that in some cases the maximum SPL is limited by the cartridge. This is especially true for classical input using  $\pm 40$  V supply. On the other hand, a classical input with  $\pm 14$  V supply will reduce the maximum SPL 9 dB compared with  $\pm 40$  V supply.

Maximum measurable SPL in dB for different cartridge sensitivities, rounded to nearest integer value

| Cartridge Sensitivity mV/Pa | CCLD $\pm 7$ V Output Swing | NEXUS $\pm 40$ V | PULSE $\pm 14$ V |
|-----------------------------|-----------------------------|------------------|------------------|
| 50                          | 134                         | 149              | 140              |
| 31.6                        | 138                         | 153              | 144              |
| 12.5                        | 146                         | 161              | 152              |
| 3                           | 158                         | 173              | 164              |
| 1                           | 168                         | 183              | 174              |

The general formula is:

$$\text{Max. SPL in dB} = [94 + 20 \cdot \log(V_{max}/S_v)]$$

where  $V_{max}$  is the maximum (3% distortion) RMS output voltage of the preamplifier and  $S_v$  is the (loaded) cartridge sensitivity in V/Pa.

## Measuring in Magnetic Fields

When performing sound measurements in magnetic fields like on a hybrid or electrical car, close to wind turbine generators, close to big MR scanners or other similar equipment, it may be beneficial to use the latest Brüel & Kjær microphones made out of titanium, such as Types 4948, 4949, 4955 and 4961. The titanium is much less susceptible to magnetic fields than metals normally used in microphones.

The magnetic field impact is seen as noise and increases the noise floor of the microphone. For example:

- 1/4-inch Array Microphone 4958 has a susceptibility to magnetic fields corresponding to an equivalent SPL of 40 dB for an 80 A/m, 50 Hz field
- 1/2-inch Free-field Microphone Type 4189 has a susceptibility to magnetic fields corresponding to an equivalent SPL of 6 dB SPL for an 80 A/m, 50 Hz field

\* Optimized means that the microphone has a flat frequency response in the specified frequency range of the particular sound field

- Titanium microphone Types 4955 and 4961 have no detectable influence from an 80 A/m, 50 Hz magnetic field

## The Effects of Temperature

### What happens at high temperatures (above +80 °C)?

- Electronic components may exceed their maximum junction temperature. This is very serious and should be avoided
- Prepolarized microphones may lose electret voltage. This will result in permanent sensitivity loss, which means, externally polarized microphones should always be used if high-temperature tests are performed for longer periods of time
- The diaphragm tension will reduce. This means increased sensitivity and changes in frequency response
- The cable jacket and other isolators may melt. While this is not beautiful, it is not always catastrophic
- In practically all cases, an exponential increase in the inherent electronic noise must be expected. The basic rule of thumb: Many temperature depending factors will double for every 10° temperature increase (Arrhenius' law)

Microphones are specified at 23 °C, and have a temperature coefficient that specifies how the microphone will behave with changed temperature. This parameter tells something about the microphone's stability and quality. See the microphone's product data for information about its temperature coefficient.

General purpose microphones like Type 4189 perform well within their specifications in the temperature range from -30 to +150 °C.

General purpose preamplifiers have a relatively stable DC bias up to around 80 °C. They are specified from -20 to +60 °C (-4 to +140 °F), but work very well at temperatures of up to +80 °C, with some increase in noise.

High-temperature Preamplifier Type 1706 is designed to perform up to 125 °C. At high temperatures, it has a more stable DC bias point and no reduction of maximum SPL limit. The electrical noise increases at high temperatures, which affects the lower limit of the dynamic range of the microphone/preamplifier combination and limits its ability to measure very low sound pressure levels.

In regards to the use of cables in high temperatures, you should note that PUR cables are not recommended. Consider silicone cables, which are rated at 150 °C or PFA cables which function from -75 to +250 °C, like cable AO-0406.


### What if it gets really hot (+125 °C)?

- You must get the preamplifier away from the hotspot
- Flush Mounting Kits UA-0122 and UA-0123 or Swan Neck UA-0196 are good tools to use
- Sometimes Probe Microphone Type 4182 will do the job

Probe Microphone Type 4182 allows sound pressure measurements to be made in small or awkward places or in harsh environments with high temperatures (up to 700 °C). The probe microphone has a smooth frequency response from 1 Hz to 20 kHz, with a very smooth high-frequency roll-off. Measurements can be performed extremely close to the sound source due to its small size. Measurement points can be closely spaced when it is necessary to have high spatial resolution. The static pressure inside the probe microphone can be equalized to that of the measurement site.

### Measuring in extremely cold temperatures (-160 °C)

Type 4944-W-005 is a special microphone that is designed to handle measurements down to -180 °C, which is perfect for use in, for example, cryogenic wind tunnels.

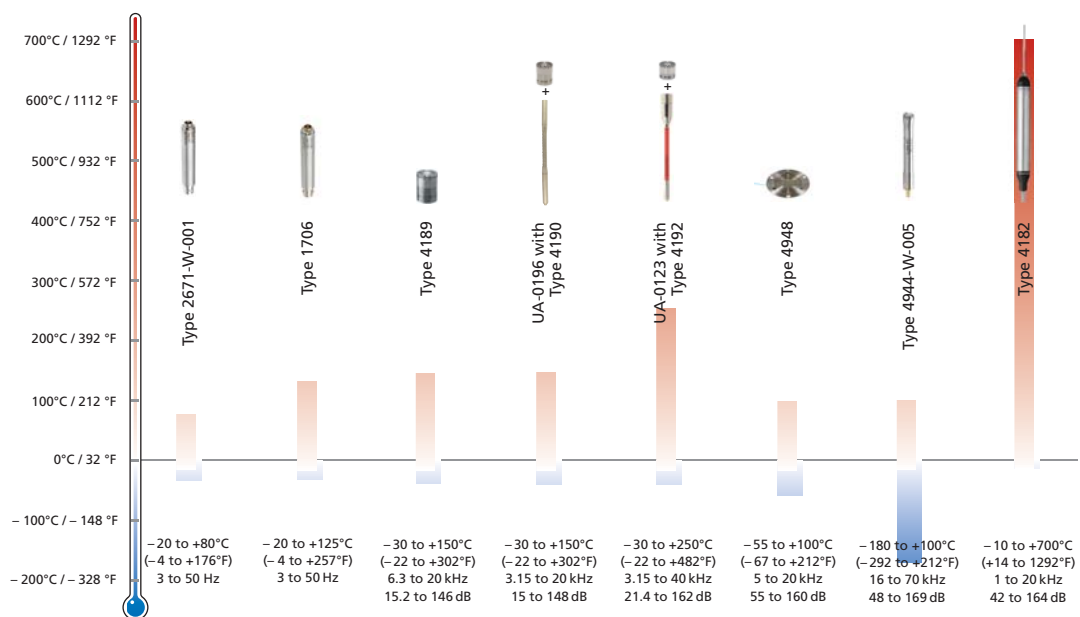

## Replacement of Discontinued Brüel & Kjær Microphones

Most present Brüel & Kjær microphones are Falcon Range™ microphones. The Falcon Range offers a number of advantages, for example, the diaphragm mounting method (press fit mounted or laser welded) provides a higher mechanical robustness. Furthermore, the use of a stainless steel diaphragm results in an improved resistance to environmental conditions. The table can be helpful if you need to replace an older Brüel & Kjær microphone type.

| Older Microphone Types | Recommended Replacement Microphone Types |
|------------------------|--|
| 4133                   | 4191                                     |
| 4134                   | 4192                                     |
| 4135                   | 4939                                     |
| 4136                   | 4938                                     |
| 4147                   | 4193                                     |
| 4155                   | 4189                                     |
| 4165                   | 4190                                     |
| 4166                   | 4943                                     |
| 4196/4935              | 4957                                     |
| 4198                   | 4952                                     |
| 4951                   | 4958                                     |
| 4181                   | 4197                                     |
| UA-1404                | 4952                                     |



## Definition of Given Microphone Specifications

### Standards

The following abbreviations for standards are used in the tables.

| IEC 61094 |                  | IEC 61672* |                   | ANSI |                   |
|-----------|------------------|------------|-------------------|------|-------------------|
| A         | IEC 61094-4 WS1F | I          | IEC 61672 Class 1 | K    | ANSI S1.4 Type 1  |
| B         | IEC 61094-4 WS2F | J          | IEC 61672 Class 2 | L    | ANSI S1.4 Type 2  |
| C         | IEC 61094-4 WS3F |            |                   | M    | ANSI S1.12 Type M |
| D         | IEC 61094-4 WS1P |            |                   |      |                   |
| E         | IEC 61094-4 WS2P |            |                   |      |                   |
| F         | IEC 61094-4 WS3P |            |                   |      |                   |
| G         | IEC 61094-1 LS1P |            |                   |      |                   |
| H         | IEC 61094-1 LS2P |            |                   |      |                   |

\* IEC 61672 is the sound level meter standard and is only applicable to the microphone when it is used with a sound level meter

Traditionally acoustical engineers work in dB SPL defined as  $20 \times \log(p_a/20 \mu\text{Pa})$  where  $p_a$  is the actual (dynamic) pressure in pascals.

Pressure sensors often refer to PSI (pounds per square inch).

It may be good to know that dB SPL can easily be converted to pascal and after that to PSI.

1 Pa = 0.0001450 PSI and hence 1 PSI = 6.89 kPa

| dB SPL | Pressure Pascal | Pressure PSI |
|--------|-----------------|--------------|
| 94     | 1               | 0.000145     |
| 154    | $10^3$          | 0.145        |
| 174    | $10^4$          | 1.45         |
| 194    | $10^5$          | 14.5         |
| 200    | $2 \times 10^5$ | 29           |

### PSI or dB?

## Free-field Microphones

Free-field microphones are particularly suitable for performing measurements away from reflecting surfaces, for example, when making outdoor measurements with a sound level meter, or in an

acoustically well-damped indoor environment such as an office with natural acoustic damping.



| Type No.                                       |                        | 4939                | 4954                | 4137*                 | 4176                | 4188                  | 4189                  |
|--|------------------------|---------------------|---------------------|-----------------------|---------------------|-----------------------|-----------------------|
| Diameter                                       | inch                   | 1/4                 | 1/4                 | 1/2                   | 1/2                 | 1/2                   | 1/2                   |
| Optimized                                      |                        | Free-field          | Free-field          | Free-field            | Free-field          | Free-field            | Free-field            |
| Standards                                      |                        | C                   | C                   | J, L                  | I, K                | I, K                  | B, I, L               |
| Nominal Open-circuit Sensitivity               | mV/Pa                  | 4                   | 3.16                | 31.6                  | 50                  | 31.6                  | 50                    |
| Polarization Voltage**                         | V                      | 200                 | 0                   | 0                     | 0                   | 0                     | 0                     |
| Optimized Frequency Response $\pm 2$ dB        | Hz                     | 4 to 100000         | 4 to 80000          | 8 to 12500            | 7 to 12500          | 8 to 12500            | 6.3 to 20000          |
| Dynamic Range with Preamp (Preamp type number) | dB(A) to dB            | 35 to 164<br>(2670) | 35 to 164<br>(2670) | 15.8 to 146<br>(2669) | 14 to 142<br>(2669) | 15.8 to 146<br>(2669) | 15.2 to 146<br>(2669) |
| Inherent Noise                                 | dB (A)                 | 28                  | <35                 | 14.2                  | 13.5                | 14.2                  | 14.6                  |
| Capacitance                                    | pF                     | 6.1                 | 5.1                 | 12                    | 12.5                | 12                    | 13                    |
| Venting  |                        | Side                | Side                | Rear                  | Rear                | Rear                  | Rear                  |
| Lower Limiting Frequency ( $-3$ dB)            | Hz                     | 0.3 to 3            | 0.3 to 3            | 1 to 5                | 0.5 to 5            | 1 to 5                | 2 to 4                |
| Operating Temperature Range                    | $^{\circ}\text{C}$     | -40 to +150         | -40 to +150         | -30 to +125           | -30 to +100         | -30 to +125           | -30 to +150           |
| Temperature Coefficient                        | dB/ $^{\circ}\text{C}$ | +0.003              | +0.009              | +0.005                | -0.004              | +0.005                | -0.006                |
| Pressure Coefficient                           | dB/kPa                 | -0.007              | -0.007              | -0.021                | -0.02               | -0.021                | -0.01                 |

\* Class 2 microphone for Type 2237 \*\* 0 V = Prepolarized microphone



| Type No.  |                  | 4190                | 4191                  | 4950                | 4145                  |
|---|------------------|---------------------|-----------------------|---------------------|-----------------------|
| Diameter  | inch             | 1/2                 | 1/2                   | 1/2                 | 1                     |
| Optimized   |                  | Free-field          | Free-field            | Free-field          | Free-field            |
| Standards   |                  | B, I, L             | B, I, L, M            | I, K                | A, I                  |
| Nominal Open-circuit Sensitivity                              | mV/Pa            | 50                  | 12.5                  | 50                  | 50                    |
| Polarization Voltage*   | V                | 200                 | 200                   | 0                   | 200                   |
| Optimized Frequency Response $\pm 2$ dB                       | Hz               | 3.15 to 20000       | 3.15 to 40000         | 4 to 16000          | 2.6 to 18000          |
| Dynamic Range with Preamplifier<br>(Preamplifier type number) | dB(A) to dB      | 15 to 148<br>(2669) | 21.4 to 162<br>(2669) | 14 to 142<br>(2669) | 10.2 to 146<br>(2669) |
| Inherent Noise  | dB (A)           | 14.5                | 20                    | 13.5                | 10                    |
| Capacitance   | pF               | 16                  | 18                    | 12.5                | 66                    |
| Venting   |                  | Rear                | Side                  | Rear                | Rear                  |
| Lower Limiting Frequency ( $-3$ dB)                           | Hz               | 1 to 2              | 1 to 2                | 0.5 to 5            | 1 to 2                |
| Operating Temperature Range                                   | $^{\circ}$ C     | $-30$ to $+150$     | $-30$ to $+300$       | $-30$ to $+100$     | $-30$ to $+100$       |
| Temperature Coefficient                                       | dB/ $^{\circ}$ C | $-0.012$            | $-0.002$              | $+0.006$            | $-0.002$              |
| Pressure Coefficient  | dB/kPa           | $-0.01$             | $-0.007$              | $-0.02$             | $-0.015$              |

\* 0 V = Prepolarized microphone

# Diffuse-field Microphones

A diffuse-field microphone, also called a random-incidence microphone, is designed to have a flat response when signals arrive simultaneously from all directions. They should, therefore, not only be used for making measurements in reverberation chambers, but also in all situations where the sound field is diffuse, or where several

sources contribute to the sound pressure at the measurement position. Examples include indoor measurements where the sound is reflected by walls, ceilings, and objects in the room, or measurements made inside a car.




| Type No.  |                  | 4942                  | 4943                  |
|---|------------------|-----------------------|-----------------------|
| Diameter  | inch             | 1/2                   | 1/2                   |
| Optimized   |                  | Diffuse-field         | Diffuse-field         |
| Standards   |                  | K                     | K                     |
| Nominal Open-circuit Sensitivity                              | mV/Pa            | 50                    | 50                    |
| Polarization Voltage*   | V                | 0                     | 200                   |
| Optimized Frequency Response $\pm 2$ dB                       | Hz               | 6.3 to 16000          | 3.15 to 10000         |
| Dynamic Range with Preamplifier<br>(Preamplifier type number) | dB(A) to dB      | 15.2 to 146<br>(2669) | 15.9 to 148<br>(2669) |
| Inherent Noise  | dB (A)           | 14.6                  | 15.5                  |
| Capacitance   | pF               | 13                    | 16                    |
| Venting   |                  | Rear                  | Rear                  |
| Lower Limiting Frequency ( $-3$ dB)                           | Hz               | 2 to 4                | 1 to 2                |
| Operating Temperature Range                                   | $^{\circ}$ C     | $-40$ to $+150$       | $-40$ to $+150$       |
| Temperature Coefficient                                       | dB/ $^{\circ}$ C | $-0.006$              | $-0.010$              |
| Pressure Coefficient  | dB/kPa           | $-0.01$               | $-0.008$              |
| Preamplifier Included   |                  | No                    | No                    |

\* 0 V = Prepolarized microphone

In many cases, the pressure- and diffuse-field responses will both be within  $\pm 2$  dB up to a certain frequency. The graph shows that for Type 4943, both responses are within  $\pm 2$  dB up to 10 kHz

Solid line: pressure-field response


Dashed line: diffuse-field response

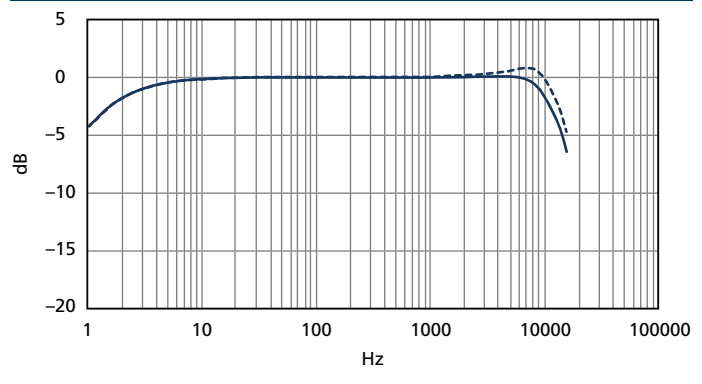

# Pressure-field Microphones


A pressure-field microphone is best suited for measurement of the sound pressure in a small closed couplers or close to hard reflective surfaces. A special class of pressure microphones is Brüel & Kjær's surface microphone, which due to its unique geometrical

dimensions, can be mounted directly on surfaces such as the skin of an aeroplane or the surface of a car, for easy measurement of the true pressure fluctuations.



| Type No.  |             | 4138                            | 4938*               | 4944                | 4947                  | 4192                  | 4144                |
|---|-------------|---------------------------------|---------------------|---------------------|-----------------------|-----------------------|---------------------|
| Diameter  | inch        | 1/8                             | 1/4                 | 1/4                 | 1/2                   | 1/2                   | 1                   |
| Optimized   |             | Pressure-field                  | Pressure-field      | Pressure-field      | Pressure-field        | Pressure-field        | Pressure-field      |
| Standards   |             | –                               | F                   | F                   | K                     | E, K, M               | D, L                |
| Nominal Open-circuit Sensitivity                              | mV/Pa       | 1                               | 1.6                 | 1                   | 12.5                  | 12.5                  | 50                  |
| Polarization Voltage†   | V           | 200                             | 200                 | 0                   | 0                     | 200                   | 200                 |
| Optimized Frequency Response ±2 dB                            | Hz          | 6.5 to 140000                   | 4 to 70000          | 4 to 70000          | 8 to 10000            | 3.15 to 20000         | 2.6 to 8000         |
| Dynamic Range with Preamplifier<br>(Preamplifier type number) | dB(A) to dB | 52.2 to 168<br>(2670 + UA-0160) | 42 to 172<br>(2670) | 46 to 170<br>(2670) | 21.4 to 160<br>(2669) | 20.7 to 162<br>(2669) | 11 to 146<br>(2669) |
| Inherent Noise  | dB (A)      | 43                              | 30                  | 30                  | 17.5                  | 19                    | 9.5                 |
| Capacitance   | pF          | 3.5                             | 6.1                 | 5                   | 14                    | 18                    | 55                  |
| Venting   |             | Side                            | Side                | Side                | Rear                  | Side                  | Side                |
| Lower Limiting Frequency (–3 dB)                              | Hz          | 0.5 to 5                        | 0.3 to 3            | 0.3 to 3            | 1 to 5                | 1 to 2                | 1 to 2              |
| Operating Temperature Range                                   | °C          | –30 to +100                     | –40 to +150         | –40 to +150         | –30 to +125           | –30 to +150           | –30 to +100         |
| Temperature Coefficient                                       | dB/°C       | –0.01                           | +0.003              | +0.008              | +0.006                | –0.002                | –0.003              |
| Pressure Coefficient  | dB/kPa      | –0.01                           | –0.003              | –0.003              | –0.006                | –0.005                | –0.016              |
| Preamplifier Included   |             | No                              | No                  | No                  | No                    | No                    | No                  |

\* Type 4938-W-001 is optimized for high static pressure  
† 0 V = Prepolarized microphone



| Type No.  |             | 4948             | 4948-A           | 4948-B           | 4948-W-005       | 4949             | 4949-B           | 4956                        |
|---|-------------|------------------|------------------|------------------|------------------|------------------|------------------|-----------------------------|
| Diameter  | inch        | 0.79*            | 0.79*            | 0.79*            | 0.79*            | 0.79*            | 0.79*            | 1/2                         |
| Optimized   |             | Surface Pressure | Surface Pressure | Surface Pressure | Surface Pressure | Surface Pressure | Surface Pressure | Pressure                    |
| Standards   |             | –                | –                | –                | –                | –                | –                | –                           |
| Nominal Open-circuit Sensitivity                              | mV/Pa       | 1.4              | 1.4              | 1.4              | 0.314            | 11.2             | 11.2             | 12.5                        |
| Polarization Voltage†   | V           | 0                | 0                | 0                | 0                | 0                | 0                | 0                           |
| Optimized Frequency Response ±3 dB                            | Hz          | 5 to 20000       | 5 to 20000       | 5 to 20000       | 5 to 12500       | 5 to 20000       | 5 to 20000       | 3.5 to 20000                |
| Dynamic Range with Preamplifier<br>(Preamplifier type number) | dB(A) to dB | 55 to 160        | 55 to 160        | 55 to 160        | 68 to 176        | 30 to 140        | 30 to 140        | 26.5 to 135<br>(2671-W-001) |
| Inherent Noise  | dB (A)      | 55 (typical)     | 55 (typical)     | 55 (typical)     | 68               | 30 (typical)     | 30 (typical)     | 18.6                        |
| Capacitance   | pF          | N/A              | N/A              | N/A              | N/A              | N/A              | N/A              | 13                          |
| Venting   |             | Front            | Front            | Front            | Front            | Front            | Front            | Front                       |
| Lower Limiting Frequency (–3 dB)                              | Hz          | 1 to 5           | 1 to 5           | 1 to 5           | 1 to 5           | 0.5 to 5         | 0.5 to 5         | 1 to 2                      |
| Operating Temperature Range                                   | °C          | –55 to +100      | –55 to +100      | –55 to +100      | –55 to +100      | –30 to +100      | –30 to +100      | –30 to +70                  |
| Temperature Coefficient                                       | dB/°C       | 0.013            | 0.013            | 0.013            | 0.013            | 0.013            | 0.013            | –0.006                      |
| Pressure Coefficient  | dB/kPa      | –0.007           | –0.007           | –0.007           | –0.005           | –0.007           | –0.007           | –0.009                      |
| Preamplifier Included   |             | CCLD             | CCLD             | CCLD             | CCLD             | CCLD             | CCLD             | N/A                         |
| TEDS UTID   |             | 769              | 769              | 769              | 769              | 769              | 769              | N/A                         |
| CIC   |             | No               | Yes              | Yes              | No               | No               | Yes              | N/A                         |

\* Diaphragm = 0.41 inch

† 0 V = Prepolarized microphone

# Multi-field Microphone

Multi-field microphones are ideal for any situation in which the nature of the sound field is unpredictable, or the direction of the dominant noise source is difficult to pinpoint or shifts over time.

Brüel & Kjær's Multi-field Microphone Type 4961 is the world's first 1/4-inch condenser microphone with a 20 dB(A) noise floor, a maximum SPL of 130 dB and 60 mV/Pa sensitivity – which is the same basic performance you would expect from a conventional 1/2-inch condenser microphone. It guarantees that your

measurements are accurate in free or diffuse sound fields and at any angle of incidence.

## Manufacturing and Stability

The microphone and preamplifier's all-titanium construction ensures maximum resistance to corrosion. This means that you will never have to worry about pinholes in the microphone's diaphragm – a common problem with nickel foil diaphragms. And titanium's insensitivity to magnetic fields means that you do not have to worry about interference from electromagnetic sources.




| Type No.                                |                  | 4961           | 4961-B         |
|---|------------------|----------------|----------------|
| Diameter                                | inch             | 1/4            | 1/4            |
| Optimized                               |                  | Multi-field    | Multi-field    |
| Standards                               |                  | –              | –              |
| Nominal Open-circuit Sensitivity        | mV/Pa            | 65             | 65             |
| Polarization Voltage                    | V                | 0              | 0              |
| Optimized Frequency Response $\pm 2$ dB | Hz               | 12 to 20000    | 12 to 20000    |
| Dynamic Range with Preamplifier         | dB(A) to dB      | 20 to 130      | 20 to 130      |
| Inherent Noise                          | dB (A)           | 20             | 20             |
| Capacitance                             | pF               | N/A            | N/A            |
| Venting                                 |                  | Side           | Side           |
| Lower Limiting Frequency ( $-3$ dB)     | Hz               | 3 to 6         | 3 to 6         |
| Operating Temperature Range             | $^{\circ}$ C     | $-20$ to $+80$ | $-20$ to $+80$ |
| Temperature Coefficient                 | dB/ $^{\circ}$ C | 0.01           | 0.01           |
| Pressure Coefficient                    | dB/kPa           | $-0.013$       | $-0.013$       |
| Preamplifier Included                   |                  | CCLD           | CCLD           |
| TEDS UTID                               |                  | 769            | 769            |
| Connector                               |                  | SMB            | 10–32 UNF      |

### Small Microphone, Big Performance

Because Type 4961 is so small and relatively insensitive to the angle of incidence, its response is uniform (even at high frequencies) in virtually any sound field.

It is very easy to position when setting up measurements – technicians can simply place it where they want to measure and save valuable time.

Well-suited for complex spaces with non-stationary or multiple sources that need to be measured in one go, Type 4961 is ideal for the automotive or aerospace industries, for example, during in-cabin noise measurements. In effect, a single multi-field microphone can cover many measuring scenarios that would otherwise require three different conventional 1/2-inch microphones.

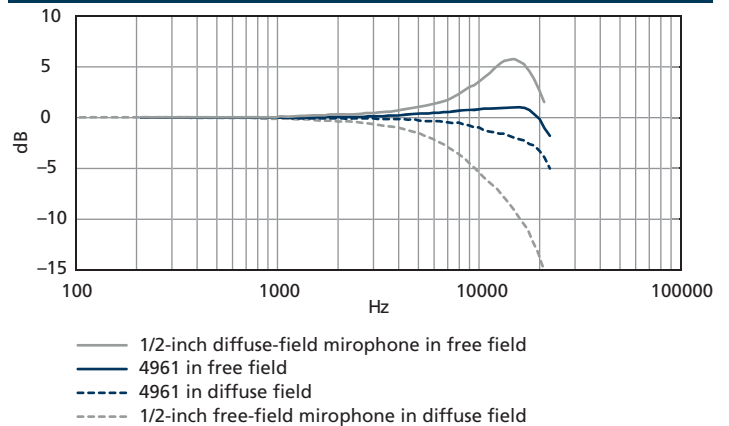

# Array Microphones

Array-based measurement techniques allow you to quickly map the sound intensity from a number of points across a source. Brüel & Kjær provides a wide selection of arrays to cover most measurement situations including acoustic holography and beamforming, as well as the microphones best suited for use in these systems.

- **Type 4957** is an economy type with only basic TEDS and a limited frequency range, but the same sensitivity

- **Type 4958** is a precision type with “intelligent” TEDS, that is, TEDS that contains polynomial coefficients describing the complex transfer function of the microphone. This information can be used in the array application in order to increase precision
- **Type 4959** is a very short microphone for hand-held and foldable arrays

Note that Types 4944-A and 4954-A can be also used with arrays.



| Type No.  |             | 4957        | 4958        | 4959               |
|---|-------------|-------------|-------------|--------------------|
| Diameter  | inch        | 1/4         | 1/4         | 1/4                |
| Optimized   |             | Array       | Array       | Array              |
| Standards   |             | –           | –           | –                  |
| Nominal Open-circuit Sensitivity                      | mV/Pa       | 11.2        | 11.2        | 11.2               |
| Polarization Voltage*                                 | V           | 0           | 0           | 0                  |
| Optimized Frequency Response $\pm 2$ dB               | Hz          | 50 to 10000 | 20 to 20000 | 50 to 20000        |
| Dynamic Range with Preamplifier                       | dB(A) to dB | 32 to 134   | 28 to 140   | 32 to 134          |
| Inherent Noise  | dB (A)      | <32         | <28         | <32                |
| Capacitance   | pF          | N/A         | N/A         | N/A                |
| Venting   |             | Front       | Front       | Front              |
| Lower Limiting Frequency (–3 dB)                      | Hz          | <50         | <50         | <50                |
| Operating Temperature Range                           | °C          | –10 to +55  | –10 to +55  | –10 to +55         |
| Temperature Coefficient                               | dB/°C       | –           | –           | –                  |
| Pressure Coefficient                                  | dB/kPa      | –           | –           | –                  |
| Preamplifier Included                                 |             | CCLD        | CCLD        | CCLD               |
| TEDS UTID/UDID  |             | I27-0-0-0U  | I27-0-0-1U  | I27-0-0-1U         |
| Connector   | Type        | SMB         | SMB         | Brüel & Kjær array |
| Length of Array Microphone with Plug (including plug) | –           | 28.0 (34.2) | 28.0 (34.2) | 12.0 (18.2)        |

\* 0 V = Prepolarized microphone

# Low-noise Microphones

Low-noise microphones are required for qualification of anechoic chambers for sound power measurements and test of components with low sound power ratings.

- **Type 4179** is suitable for monitoring very low background noise levels down to  $-5.5$  dB(A) and must be used with dedicated preamplifier Type 2660 or 2660-W-001. This combination has an unbeatable noise floor of  $-2.5$  dBA

- **Type 4955** is a 1/2-inch TEDS “all titanium” microphone with an excellent noise floor of typically 5.5 dBA
- **Type 4955-A** is a dedicated unit for sound level meters, such as Types 2250 and 2270. It is optimized to work with  $\pm 18$  V




| Type No.   |                  | 4179                          | 4955                      |
|--|------------------|-------------------------------|---------------------------|
| Diameter   | inch             | 1                             | 1/2                       |
| Optimized  |                  | Low-noise                     | Low-noise                 |
| Standards  |                  | –                             | –                         |
| Nominal Open-circuit Sensitivity                           | mV/Pa            | 100                           | 1100                      |
| Polarization Voltage                                       | V                | 200                           | 200                       |
| Optimized Frequency Response $\pm 2$ dB                    | Hz               | 10 to 10000                   | 10 to 16000               |
| Dynamic Range with Preamplifier (Preamplifier type number) | dB(A) to dB      | $-2.5$ to $+102$ (2660)       | $6.5$ to $110$ (Built-in) |
| Inherent Noise   | dB (A)           | $-5.5^*$                      | $< 6.5^\dagger$           |
| Capacitance  | pF               | 40                            | N/A                       |
| Venting  |                  | Side                          | Front                     |
| Lower Limiting Frequency ( $-3$ dB)                        | Hz               | 5 to 7                        | 5                         |
| Operating Temperature Range                                | $^\circ\text{C}$ | $-30$ to $+100$               | $-20$ to $+100$           |
| Temperature Coefficient                                    |                  | $-0.004$ dB/ $^\circ\text{C}$ | $< \pm 0.01$ dB/K         |
| Pressure Coefficient                                       | dB/kPa           | $-0.016$                      | $-0.013$                  |
| Preamplifier Included                                      |                  | No                            | Yes                       |
| TEDS UTID  |                  |                               | 116289                    |
| Connector  |                  | N/A                           | LEMO 1B                   |

\* Cartridge alone, must be used with Type 2660 preamplifier and WH-3315 + WL-1302

† With integral preamplifier

Every microphone has an inherent noise caused, amongst other things, by Brownian movements. This results in a noise voltage, which cannot be avoided even with the best microphone. Low-noise TEDS Microphone Type 4955 consists of a high-sensitivity 1/2-inch cartridge, which has been optimized for the lowest inherent noise, and a matching preamplifier. The graph shows the typical noise spectrum for Type 4955

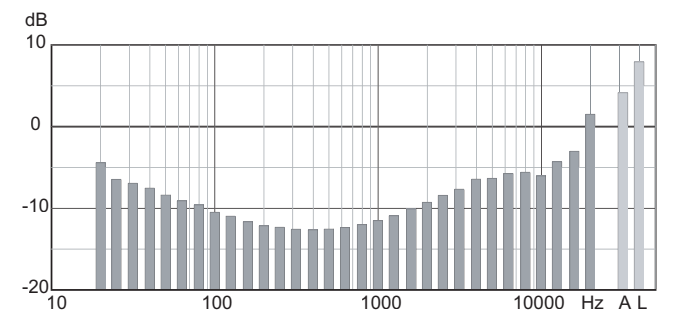

# Outdoor Microphones

Brüel & Kjær's outdoor microphones are intended for permanent or semi-permanent outdoor use. In addition to the obvious weather protection, other features can be found with all Brüel & Kjær outdoor microphones, including calibration facilities, on-site remote verification (CIC), and conformance with standards of special importance such as IEC 61672 with sound level meters such as Type 2250 and Type 2270. This particular standard defines the requirements to the directivity response of the microphone and is often overlooked or misinterpreted.

- **Weatherproof Microphone Unit Type 4184** is for permanent, semi-permanent and portable noise monitoring. It features a probe type microphone for optimal protection and directivity response plus both CIC facility and a built-in acoustic sound source for verification
- **Outdoor Microphone Type 4198** is for semi-permanent noise monitoring. Depending on circumstances, this well-protected

microphone can sustain several months of unattended use. Features CIC, a Falcon Range microphone and Outdoor Microphone Kit UA-1404

- **Outdoor Microphone Type 4952** has outer parts constructed of carefully selected polymer materials making it suitable for longer periods of unattended outdoor use (at least one year service intervals). This microphone also features CIC. The use of separate equalization filters enables Type 4952 to fulfil the requirements of IEC 61672 both for 0° and 90° of incidence
- **Outdoor Microphone Kit UA-1404** is for the protection of your existing Type 4188, 4189, or 4190 microphones

All outdoor microphones are supported by a broad range of accessories. Please refer to the [Microphone Accessories](#) for an overview.



| Type No.                           |             | 4184       | 4198         | 4952        |
|------------------------------------|-------------|------------|--------------|-------------|
| Diameter                           | inch        | Probe      | 1/2          | 1/2         |
| Optimized                          |             | Outdoor    | Outdoor      | Outdoor     |
| Standards                          |             | I, K       | I, K         | I, K        |
| Nominal Open-circuit Sensitivity   | mV/Pa       | 12.5       | 50           | 31.6        |
| Polarization Voltage*              | V           | 200        | 0            | 0           |
| Optimized Frequency Response ±2 dB | Hz          | 20 to 8000 | 6.3 to 16000 | 8 to 12500  |
| Dynamic Range with Pre-amplifier   | dB(A) to dB | 25 to 140  | 15.2 to 146  | 15.8 to 146 |
| Inherent Noise                     | dB (A)      | 25         | 15.2         | <16         |
| Venting                            |             | Rear       | Rear         | Rear        |
| Lower Limiting Frequency (-3 dB)   | Hz          | <20        | 2 to 4       | 1 to 5      |
| Operating Temperature Range        | °C          | -40 to +55 | -25 to +60   | -30 to +60  |
| Temperature Coefficient            | dB/°C       | -0.005     | -0.006       | 0.005       |
| Pressure Coefficient               | dB/kPa      | -0.006     | -0.01        | -0.021      |
| Pre-amplifier Included             |             | Yes        | Yes          | Yes         |
| Connector                          |             | B&K 7-pin  | LEMO 1B      | LEMO 1B     |

\* 0 V = Pre-polarized microphone



# Laboratory Standard Microphones


The most used laboratory standard microphones are **Types 4160** (1-inch) and **4180** (1/2-inch). These microphones have a well-defined cavity in front of the diaphragm and are optimized for use in couplers and for maximum long-term stability under reference conditions. The proven long-term stability is well below 0.1 dB per year.

The most common way of performing primary calibration of laboratory standard microphones is to use the reciprocity calibration principle. Brüel & Kjær offers the world's most used reciprocity calibration apparatus, Type 5998, which is part of Reciprocity Calibration System Type 9699.



| Type No.   |                  | 4160             | 4180             |
|--|------------------|------------------|------------------|
| Diameter   | inch             | 1                | 1/2              |
| Optimized Standards  |                  | Calibration G    | Calibration H    |
| Nominal Open-circuit Sensitivity                           | mV/Pa            | 47               | 12.5             |
| Polarization Voltage                                       | V                | 200              | 200              |
| Optimized Frequency Response $\pm 2$ dB                    | Hz               | 2.6 to 8000      | 4 to 20000       |
| Dynamic Range with Preamplifier (Preamplifier type number) | dB(A) to dB      | 10 to 146 (2673) | 21 to 160 (2673) |
| Inherent Noise   | dB (A)           | 9.5              | 18               |
| Capacitance  | pF               | 55               | 17.5             |
| Venting  |                  | Side             | Side             |
| Lower Limiting Frequency ( $-3$ dB)                        | Hz               | 1 to 2           | 1 to 3           |
| Operating Temperature Range                                | $^{\circ}$ C     | $-10$ to $+50$   | $-30$ to $+100$  |
| Temperature Coefficient                                    | dB/ $^{\circ}$ C | $-0.003$         | $-0.002$         |
| Pressure Coefficient                                       | dB/kPa           | $-0.00016$       | $-0.00007$       |
| Preamplifier Included                                      |                  | No               | No               |

Measured stability of Brüel & Kjær Laboratory Reference Microphone Type 4180 over a 22-year period

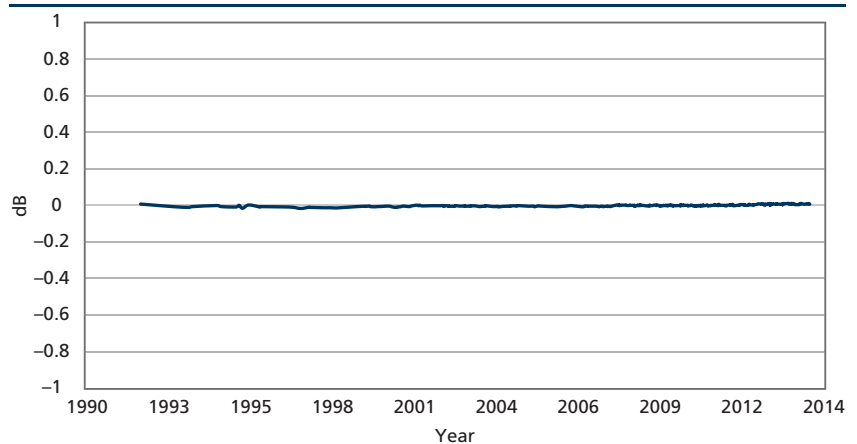

# SPECIAL ACOUSTIC TRANSDUCERS

Brüel & Kjær also offers a range of special microphones, including:

- **1/2-inch Pressure-field Microphone Type 4193** is designed to measure infrasound, for example, in ship engine rooms, in helicopters and in wind-buffed buildings
- **Type 4964** brings the  $-3$  dB limit of Hand-held Analyzer Types 2250 and 2270 down to 0.3 Hz and with UC-0211 down to 0.13 Hz
- **Binaural Microphone Type 4101-A** is designed especially for binaural recording where testing on a human subject is preferred and/or the use of the traditional Head and Torso Simulator (HATS) method is precluded

- **Probe Microphone Type 4182** has a choice of probe tubes, stiff or flexible, making it perfect for measurements in awkward places
- **Impedance Tube Microphone Type 4187** is a 1/4-inch microphone specially designed for use in Impedance Tube Kit Type 4206. The microphone features a non-detachable protection grid that forms an airtight front cavity



| Type No.   |                  | 4193               | 4193 with UC-0211 | 4964                     |
|--|------------------|--------------------|-------------------|--------------------------|
| Diameter   | inch             | 1/2                | 1/2               | 1/2                      |
| Optimized  |                  | Low-frequency      | Low-frequency     | Low-frequency            |
| Standards  |                  | E, K, M            | E, K, M           | B, I, L                  |
| Nominal Open-circuit Sensitivity                           | mV/Pa            | 12.5               | 2                 | 50                       |
| Polarization Voltage                                       | V                | 200                | 200               | 0                        |
| Optimized Frequency Response $\pm 2$ dB                    | Hz               | 0.07 to 20000      | 0.13 to 20000     | 0.03 to 20000            |
| Dynamic Range with Preamplifier (Preamplifier type number) | dB(A) to dB      | 20.7 to 161 (2669) | 29 to 148 (2669)  | 16.5 to 134 (2671-W-001) |
| Inherent Noise   | dB (A)           | 19                 | 29                | 14.6                     |
| Capacitance  | pF               | 18                 | 118               | 14                       |
| Venting  |                  | Side               | Side              | Rear                     |
| Lower Limiting Frequency ( $-3$ dB)                        | Hz               | 0.01 to 0.05       | <0.1              | 0.01 to 0.05             |
| Operating Temperature Range                                | $^{\circ}$ C     | $-30$ to 150       | $-30$ to 150      | $-30$ to 150             |
| Temperature Coefficient                                    | dB/ $^{\circ}$ C | $-0.002$           | $-0.002$          | $-0.006$                 |
| Pressure Coefficient                                       | dB/kPa           | $-0.005$           | $-0.005$          | 0.01                     |
| Preamplifier Included                                      |                  | No                 | No                | No                       |



| Type No.                                |                  | 4965                          | 4101-A                       | 4182         | 4187      |
|---|------------------|-------------------------------|------------------------------|--------------|-----------|
| Diameter                                | inch             | 1/5                           | 1/5                          | Probe        | 1/4       |
| Optimized                               |                  | Binaural recording headphones | Binaural recording with TEDS | Probe        | Pressure  |
| Standards                               |                  | –                             | –                            | –            | –         |
| Nominal Open-circuit Sensitivity        | mV/Pa            | 20                            | 20                           | 3.16         | 4         |
| Polarization Voltage*                   | V                | 0                             | 0                            | 200          | 200       |
| Optimized Frequency Response $\pm 2$ dB | Hz               | 20 to 20000                   | 20 to 20000                  | 1 to 20000   | 1 to 6400 |
| Dynamic Range with Preamplifier         | dB(A) to dB      | 23 to 134                     | 23 to 134                    | 42 to 164    | –         |
| Inherent Noise                          | dB (A)           | 23                            | 23                           | 42           | –         |
| Capacitance                             | pF               | N/A                           | N/A                          | N/A          | 6.4       |
| Venting                                 |                  | Rear                          | Rear                         | Selected     | Rear      |
| Lower Limiting Frequency ( $-3$ dB)     | Hz               | <20                           | <20                          | <0.7         | <1        |
| Operating Temperature Range             | $^{\circ}$ C     | 10 to 40                      | $-30$ to 70                  | $-10$ to 700 | –         |
| Temperature Coefficient                 | dB/ $^{\circ}$ C | –                             | –                            | $-0.005$     | –         |
| Pressure Coefficient                    | dB/kPa           | –                             | –                            | $-0.007$     | –         |
| Preamplifier Included                   |                  | CCLD                          | CCLD                         | Yes          | No        |
| Connector                               |                  | 10–32 UNF                     | 10–32 UNF                    | 7-pin B&K    |           |

\* 0 V = Prepolarized microphone

## Transducers for Sound Intensity Analysis

The measurement of sound intensity provides information on the magnitude and the direction of the sound energy in the sound field. The measurement technique is used for a variety of applications such as the determination of sound power, sound absorption and sound transmission. Sound intensity is calculated from the product of the sound pressure and the particle velocity; sound pressure can easily be measured directly but the particle velocity is usually determined by a finite difference approximation. This requires two phase-matched microphones in a face-to-face configuration. Brüel & Kjær provides a number of sound intensity probes that conform to Class 1 in the Sound Intensity Instrumentation Standard, IEC 61043, which describes the characteristics of microphone pairs, intensity probes and calibration techniques for intensity measurements.

### Sound Intensity Probes

Two sound intensity probes are available:

- **Type 3654** for use with the sound intensity analysis system based on Hand-held Analyzer Type 2270
- **Type 3599**, suitable for use with sound intensity analyzers based on PULSE

The main difference is that Type 3654 is based on a 10-pin cabling system whereas Type 3599 is based on an 18-pin cabling system and includes a remote control unit. The acoustical specifications are the same as both use Sound Intensity 1/2-inch Microphone Pair Type 4197 and Dual Preamplifier Type 2683.



|                            |  |                          |   |   |
|----------------------------|--|--------------------------|---|---|
| <b>Type No.</b>            |  | <b>3654</b>              |   | <b>3599</b>                                       |
| <b>Standards</b>           |  | IEC 61043, Class 1       |   | IEC 61043, Class 1                                |
| <b>Microphones</b>         |  | 4197                     |   | 4197  |
| <b>Dual Preamplifier</b>   |  | 2683                     |   | 2683  |
| <b>Remote Control Unit</b> |  | -                        |   | ZH-0632   |
| <b>Spacer Length</b>       |  | 6 to 50 mm               |   | 6 to 50 mm  |
| <b>Spacers Included</b>    |  | 8.5 mm<br>12 mm<br>50 mm | 250 to 6300 Hz<br>250 to 5000 Hz<br>20 to 1250 Hz | 250 to 6300 Hz<br>250 to 5000 Hz<br>20 to 1250 Hz |

## Sound Intensity Microphone Pairs



|   |      |   |   |
|---|------|---|---|
| <b>Type No.</b>   |      | <b>4197</b>   | <b>4178</b>   |
| <b>Diameter</b>   | inch | 1/2   | 1/4   |
| <b>Free-field Frequency Response ±1 dB</b>                                      | Hz   | 5 to 12500  | 6 to 14000  |
| <b>Free-field Frequency Response ±2 dB</b>                                      | Hz   | 0.3 to 20000  | 4 to 100000   |
| <b>Phase Response Difference (Absolute Value) 1/3-octave Centre Frequencies</b> |      | <0.05°:<br>20 to 250 Hz   | ±0.1° × f(kHz):<br>1 to 20 kHz                          |
| <b>Amplitude Response Difference Normalized at 200 Hz</b>                       |      | <0.2 dB:<br>20 to 1000 Hz   | <0.3 dB:<br>100 to 10000 Hz                             |
| <b>Accessories Included</b>   |      | 8.5 mm Spacer:<br>UC-5349<br><br>12 mm Spacer:<br>UC-5269<br><br>50 mm Spacer:<br>UC-5270 | 6 mm Spacer:<br>UC-0196<br><br>12 mm Spacer:<br>UC-0195 |
| <b>Polarized Capacity Difference</b>  | pF   | <1.0  | <0.3  |

## Dual Preamplifier



|  |   |
|--|---|
| <b>Type No.</b>                                    | <b>2683</b>   |
| <b>Phase Matching</b>                              | <0.015° at 50 Hz (20 pF capacitance)<br>f(kHz) × 0.06°: 250 to 10000 Hz |
| <b>Electrical Noise re Microphone Sensitivity:</b> |   |
| <b>1/4-inch 6.4 pF Dummy</b>                       | 39.2 dB SPL(A)  |
| <b>1/2-inch 19.5 pF Dummy</b>                      | 19.4 dB SPL(A)  |
| <b>Attenuation for 1/2-inch Microphones</b>        | Ch.A Typ.: 0.6 dB<br>Ch.B Typ.: 0.3 dB                                  |
| <b>Attenuation for 1/4-inch Microphones</b>        | Ch.A Typ.: 1.7 dB<br>Ch.B Typ.: 0.7 dB                                  |

# Microphones for High-intensity Testing

Most noise measurements are limited to around 140 to 150 dB maximum SPL, but applications such as measurement of gunshots, airbag deployment noise, etc., require measurements of dynamic pressure fluctuations corresponding to a SPL far beyond 160 dB.\*

For measurements below 110 dB, the condenser microphone will normally be the preferred transducer, while above 200 dB pressure sensors have to be used. In the intermediate range, you can select between pressure sensors or condenser microphones.

Condenser microphones benefit from a higher degree of standardization, wider frequency range, lower noise floor, and standardized calibration methods. They are readily available as TEDS microphones for direct connection to industry standard CCLD inputs.

Condenser microphones are normally fully specified with respect to frequency response, free-field corrections, influence of accessories, etc.

- **High Static Pressure Microphone Type 4938-W-001** is specially designed for measuring in high static pressure from 1 to 10 atm. The change in response at different static pressures has been minimized
- **Airbag Microphone Type 4938 + WB-1418** is designed to fulfil “Microphone and Preamplifier System for measuring acoustic impulses within vehicles – SAE J247 FEB87”, but only when combined with Preamplifier Type 2670 + WB-1419
- **High Sound Pressure Microphone Type 4941** is used for gunshots, fireworks and rocket testing


\* Note: Above 160 dB air behaves highly non-linearly



| Type No.   |                  | 4941               | 4938-W-001           | 4938 + WB-1418             |
|--|------------------|--------------------|----------------------|----------------------------|
| Diameter   | inch             | 1/4                | 1/4                  | 1/4                        |
| Optimized  |                  | High-pressure      | High static pressure | Airbag                     |
| Standards  |                  | –                  | –                    | –                          |
| Nominal Open-circuit Sensitivity                           | mV/Pa            | 0.09               | 1.6                  | 0.4                        |
| Polarization Voltage                                       | V                | 200                | 200                  | 200                        |
| Optimized Frequency Response $\pm 2$ dB                    | Hz               | 4 to 20000         | 4 to 70000           | 0.5 to 70000               |
| Dynamic Range with Preamplifier (Preamplifier type number) | dB(A) to dB      | 73.5 to 184 (2670) | 42 to 172 (2670)     | 50 to 177 (2670 + WB-1419) |
| Inherent Noise   | dB (A)           | 59                 | 30                   | 30                         |
| Capacitance  | pF               | 3.3                | 6.1                  | 6.1                        |
| Venting  |                  | Side               | Side                 | Side                       |
| Lower Limiting Frequency ( $-3$ dB)                        | Hz               | 0.3 to 3           | 0.3 to 3             | 0.05 to 0.2                |
| Operating Temperature Range                                | $^{\circ}$ C     | $-40$ to 150       | $-40$ to 150         | $-40$ to 150               |
| Temperature Coefficient                                    | dB/ $^{\circ}$ C | –                  | +0.003               | +0.003                     |
| Pressure Coefficient                                       | dB/kPa           | –                  | $-0.003$             | $-0.003$                   |
| Preamplifier Included                                      |                  | No                 | No                   | No                         |

## Hydrophones for High-intensity Measurements

Although originally intended for underwater measurements, these hermetically sealed devices are also very suitable for high intensity pressure measurements in air. This is because of the low sensitivity of the hydrophone. The usable frequency range is from a few fractions of a Hz to around 20 kHz.

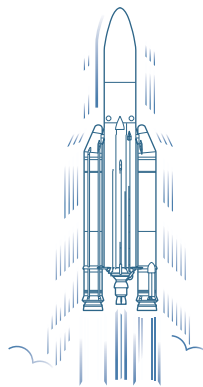

# Hydrophones

The Brüel & Kjær range of hydrophones is a range of individually calibrated, waterborne-sound transducers that have a flat frequency response and are omnidirectional over a wide frequency range. Their construction is such that they are absolutely waterproof and have good corrosion resistance. There are four types.


- **Type 8103** is suitable for laboratory and industrial use and particularly for the acoustic study of marine animals or for cavitation measurements
- **Type 8104** is ideal for calibration purposes
- **Type 8105** is a robust, spherical hydrophone that can be used at an ocean depth of 1000 m. It has excellent directional characteristics, being omnidirectional over 270° in the axial plane and 360° in the radial plane
- **Type 8106** has a built-in amplifier that gives a signal suitable for transmission over long underwater cables. It can be used down to an ocean depth of 1000 m



| Type No.  | 8103   | 8104                            | 8105  | 8106  |
|---|--|---------------------------------|---|---|
| <b>Sensitivity*</b>                             | -211 dB re 1 V/μPa ±2 dB   | -205 dB re 1 V/μPa ±2 dB        |   | -173 dB re 1 V/μPa ±3 dB                            |
| <b>Nominal Voltage Sensitivity</b>              | 29 μV/Pa   | 56 μV/Pa                        |   | 2.24 mV/Pa  |
| <b>Nominal Charge Sensitivity*</b>              | 0.1 pC/Pa  | 0.44 pC/Pa                      | 0.41 pC/Pa  | N/A   |
| <b>Capacitance* (including standard cable)</b>  | 3700 pF  | 7800 pF                         | 7250 pF   | N/A   |
| <b>Frequency Response*</b> (re 250 Hz)          | 0.1 to 20000 Hz<br>+1/-1.5 dB  | 0.1 to 10000 Hz<br>±1.5 dB      | 0.1 to 100000 Hz<br>+1/-6.5 dB  | 10 to 10000 Hz<br>+0.5/-3.0 dB                      |
|   | 0.1 to 100000 Hz<br>+1.5/-6.0 dB   | 0.1 to 80000 Hz<br>±4.0 dB      | 0.1 to 160000 Hz<br>+3.5/-10.0 dB                                     | 7 to 30000 Hz<br>+0.5/-6.0 dB                       |
|   | 0.1 to 180000 Hz<br>+3.5/-12.5 dB  | 0.1 to 120000 Hz<br>+4/-12.0 dB |   | 3 to 80000 Hz<br>+6/-10.0 dB                        |
| <b>Horizontal Directivity (radial xy plane)</b> |  | ±2 dB at 100000 Hz              |   | ±2 dB at 20000 Hz                                   |
| <b>Vertical Directivity (axial xz plane)</b>    | ±4 dB at 100000 Hz   | ±2 dB at 50000 Hz               | ±2 dB over 270° at 80000 Hz<br>±2.5 dB at 100000 Hz                   | ±3 dB at 20000 Hz                                   |
| <b>Leakage Resistance* (at 20 °C)</b>           |  | >2500 MΩ                        |   |   |
| <b>Operating Temperature Range</b>              | Short-term   | -30 to +120 °C                  |   |   |
|   | Continuous   | -30 to +80 °C                   |   | -10 to +60 °C                                       |
| <b>Sensitivity Change with Temperature</b>      | Charge   | 0 to +0.03 dB/°C                | 0 to +0.03 dB/°C  | 0 to +0.03 dB/°C                                    |
|   | Voltage  | 0 to -0.03 dB/°C                | 0 to -0.04 dB/°C  | 0 to -0.03 dB/°C                                    |
| <b>Max. Operating Static Pressure</b>           | 252 dB = 4 × 10 <sup>6</sup> Pa = 40 atm = 400 m ocean depth                             |                                 | 260 dB = 9.8 × 10 <sup>6</sup> Pa = 100 atm = 1000 m ocean depth      |   |
| <b>Sensitivity Change with Static Pressure</b>  | 0 to -3 × 10 <sup>-7</sup> dB/Pa (0 to -0.03 dB/atm)                                     |                                 |   | 0 to 1 × 10 <sup>-7</sup> dB/Pa<br>0 to 0.01 dB/atm |
| <b>Allowable Total Radiation Dose</b>           | 5 × 10 <sup>7</sup> Rad.   |                                 |   |   |
| <b>Integral Cable</b>                           | 6 m waterproof low-noise double-shielded PTFE cable with standard miniature coaxial plug |                                 | 10 m waterblocked low-noise shielded cable to MIL-C-915 with BNC plug |   |
| <b>Raw Cable</b>                                | AC-0043  |                                 | AC-0034   |   |
| <b>Weight, including integral cable</b>         | 170 g (0.37 lb)  |                                 | 1.6 kg (3.5 lb)   |   |
| <b>Dimensions</b>                               | Length   | 50 mm (1.97")                   | 120 mm (4.73")  | 93 mm (3.66")                                       |
|   | ∅ (body)   | 9.5 mm (0.37")                  | 21 mm (0.83")   | 22 mm (0.87")                                       |

\* Nominal value, each hydrophone is supplied with its own calibration data  
Note: Unless otherwise stated, all values below are valid at 23 °C (73 °F)

## Hydrophone Cables and Connectors

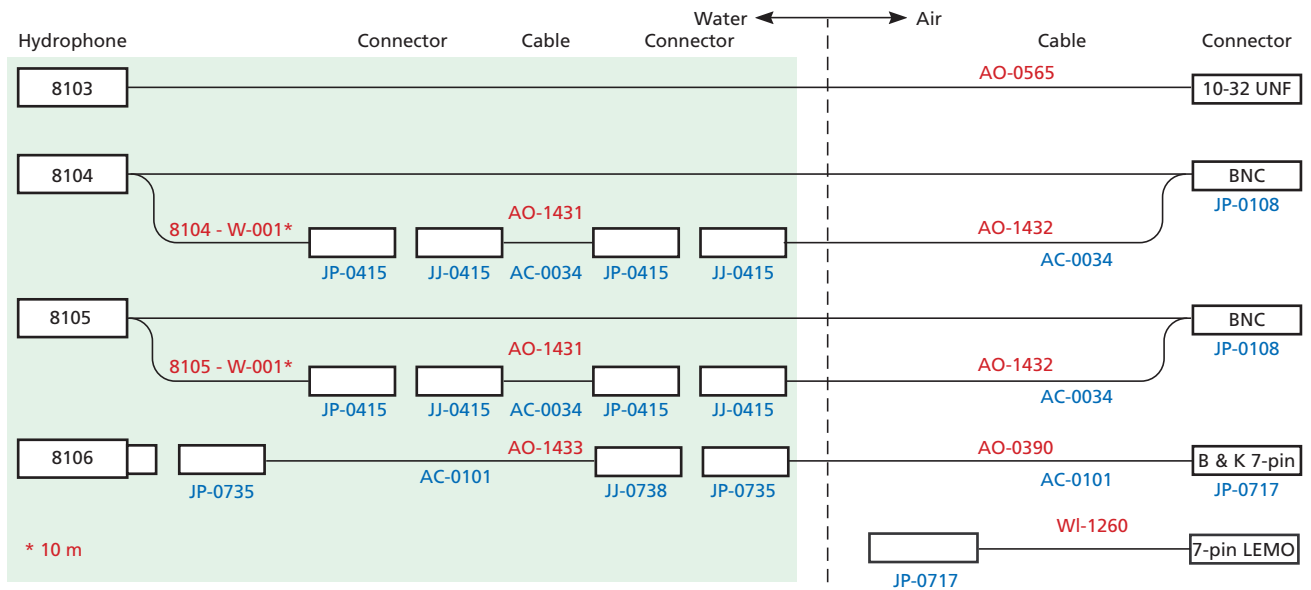

951173/5

Brüel & Kjær hydrophones are available in standard variants with the following default cable lengths:

- Type 8103 default length is 6 m
- Type 8104 default length is 10 m
- Type 8105 default length is 10 m

For Type 8106, which is supplied without cable, Underwater Cable AO-0390 is available in customer specific lengths up to 200 m.

# MICROPHONE PREAMPLIFIERS

A condenser microphone must be combined with a preamplifier to provide impedance conversion, some filtering, and the capability to drive relatively long cables without significant signal degradation.

Preamplifiers are designed in accordance with two principles, each has its own special features:

- Classical preamplifier design
- CCLD preamplifier design

## Classical Preamplifiers

The classical preamplifier has an easy to understand concept. It is basically a unity gain amplifier with extremely high input impedance and very low input capacitance.

- The supply voltage can be either  $\pm 15$  V DC or a single 80 V DC.
- The output signal has its own separate wire, as do the polarization and CIC voltage.
- Pin 5 is often used for transmission of TEDS data (so called Class II TEDS).
- CIC (Charge Injection Calibration) is possible by injecting a signal (on pin 1 of the LEMO connector).

## CCLD Preamplifiers

Despite its origin in the vibration transducer world, the Constant Current Line Drive (CCLD) principle is increasing in popularity in the area of sound and measurement applications.

Different manufacturers market transducers using the CCLD principle under different names. The benefit of CCLD is that the same wire is used for both the signal and the supply current. Using Class I TEDS, even the TEDS data can be transmitted over that same wire (using a level controlled electronic switch).

This enables the use of cost-effective coaxial cables and BNC connectors popularly used in general applications.

A CCLD input can be connected to a microphone, vibration sensor, or any other sensor with CCLD output. Due to the working principle, the signal is superimposed on a DC voltage. This DC bias voltage is typically around 12 V. Bias drift (over temperature or time) will reduce the dynamic range.

Due to the lower DC supply voltage (typically 20–28 V DC compliance voltage out of the front end), there are some restrictions to the upper limit for a CCLD solution. Other limitations with CCLD solutions include: confined to use with prepolarized microphones only, and the unavailability of CIC. However in many practical applications, this is happily accepted in order to get the benefits of CCLD, that is, ease of use and inexpensive cables.

The DC bias voltage is often used by the front end to provide some simple means of cable monitoring. A bias voltage below a certain value is interpreted as short circuit while a DC value above a certain value as open circuit.

## Classical Versus CCLD Preamplifier

|                                   | Classical         | CCLD              |
|-----------------------------------|-------------------|-------------------|
| <b>Output Voltage</b>             | 55 V <sub>p</sub> | 7 V <sub>p</sub>  |
| <b>Output Current</b>             | 2 to 20 mA        | 3 to 20 mA        |
| <b>Noise</b>                      | <2 $\mu$ V        | 4 $\mu$ V         |
| <b>Distortion</b>                 | $\leq 80$ dB      | $\leq 70$ dB      |
| <b>Verification</b>               | CIC/IVC           | No                |
| <b>IEEE 1451.4</b>                | Yes               | Yes               |
| <b>Cable Price</b>                | Higher            | Lower             |
| <b>Connector</b>                  | LEMO              | BNC               |
| <b>Microphone Type</b>            | Both              | Prepolarized only |
| <b>Accelerometer Conditioning</b> | No                | Yes               |



# Brüel & Kjær Range of Microphone Preamplifiers

We offer a large selection of robust and acoustically optimized preamplifiers that allow operation in a wide range of environmental conditions. The high-output current capability of Brüel & Kjær preamplifiers allows the use of extremely long cables, even with high sound pressure levels present at high frequencies.

Preamplifiers are available in both 1/2-inch and 1/4-inch dimensions for direct fit with the most used microphones cartridge sizes. Adaptors are available for 1-inch and 1/8-inch cartridges.

- The most popular classical 1/2-inch preamplifier is **Type 2669** which is available in several different versions
- **Type 2669-W-001** is modified for use with input modules with LEMO socket and split supply (for example, with PULSE and NEXUS). It must be used with cable WL-1302
- **Type 2670** is a Falcon Range product for precision acoustic measurements with Brüel & Kjær's wide range of condenser

microphones. It is available in different versions, each with their own special features

- CCLD preamplifier **Type 2671** is very compact and operates over a wide range of temperature, humidity and other environmental conditions
- When insert voltage calibration is required, **Type 2673** is the obvious choice
- **Type 2695**, perhaps due to its small size (half the length of the extremely popular CCLD preamplifier Type 2671), is an often overlooked unit
- **Type 2699** combines a CCLD preamplifier and an A-weighting filter in one unit. This type can be easily distinguished from other preamplifiers due to the two engraved rings

When sold alone, most preamplifiers are supplied with TEDS template UTID 1025. When sold as part of a TEDS microphone combination, the template UTID is 769 or 116289.



| Type No.                          |          | 2669-B                          | 2669-L                          | 2669-C                          | 2669-001                        | 2670                            | 2670-W-001                         | 1706                            |
|-----------------------------------|----------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|------------------------------------|---------------------------------|
| Diameter                          | inch     | 1/2                             | 1/2                             | 1/2                             | 1/2                             | 1/4                             | 1/4                                | 1/2                             |
| Optimized                         |          | Acoustical*                     | Acoustical                      | Cylindrical                     | For Type 4232 only              | Phase                           | Short, 48 mm                       | CCLD                            |
| Connector at Preamplifier         |          | LEMO 0B, 7-pin                  | LEMO 0B, 7-pin                  | LEMO 1B, 7-pin                  | LEMO 1B, 7-pin                  | Fixed (2 m)                     | Fixed (0.6 m)                      | BNC                             |
| Connector at Instrument/Cable     |          | B&K, 7-pin                      | LEMO 1B, 7-pin                  | None                            | None                            | LEMO 1B, 7-pin                  | 0.6 m cable with LEMO 1B, 7-pin    | N/A                             |
| Calibration Facility              |          | CIC                             | CIC                             | CIC                             | CIC                             | CIC                             | CIC                                | None                            |
| Polarization Voltage Support      |          | Yes                             | Yes                             | Yes                             | Yes                             | Yes                             | Yes                                | No                              |
| Supply Voltage                    | V        | ±14 to ±60 or 28 to 120         | ±14 to ±60 or 28 to 120         | ±14 to ±60 or 28 to 120         | ±14 to ±60 or 28 to 120         | ±14 to ±60 or 28 to 120         | ±5 to ±20 or 10 to 40 <sup>†</sup> | 28                              |
| Max. Output Voltage (Peak)        | V        | 55 (5 below supply)             | 55 (5 below supply)             | 55 (5 below supply)             | 55 (5 below supply)             | 55 (5 below supply)             | 15                                 | 7                               |
| Max. Output Current (Peak)        | mA       | 20                              | 20                              | 20                              | 20                              | 20                              | 17                                 | 19                              |
| Frequency Range                   | Hz       | 3 to 200000 ±0.5 dB (15 pF)     | 3 to 200000 ±0.5 dB (15 pF)     | 3 to 200000 ±0.5 dB (15 pF)     | 3 to 200000 ±0.5 dB (15 pF)     | 15 to 200000 ±0.5 dB (6.2 pF)   | 15 to 200000 ±0.5 dB (6.2 pF)      | 20 to 50000 ±2 dB (12 pF)       |
| Attenuation                       | dB       | <0.35                           | <0.35                           | <0.35                           | <0.35                           | <0.4                            | <0.4                               | <0.35                           |
| Noise A-weighted, typical         | µV       | 1.9                             | 1.9                             | 1.9                             | 1.9                             | 4                               | 9                                  | 4                               |
| Noise 22.4 Hz to 300 kHz, typical | µV       | 8.2                             | 8.2                             | 8.2                             | 8.2                             | 14                              | 18                                 | 15                              |
| Input Impedance                   | GΩ    pF | 15    0.3                       | 15    0.3                       | 15    0.3                       | 15    0.3                       | 15    0.25                      | 15    0.25                         | 6    0.5                        |
| TEDS UTID                         |          | 1025 from serial number 2221155 | 1025 from serial number 2221155 | 1025 from serial number 2221155 | 1025 from serial number 2221155 | 1025 from serial number 2248944 | No                                 | 1025 from serial number 2264319 |

\* Acoustical means a tapered preamplifier house. Other preamplifiers have cylindrical houses

† Note: The warranty does **not** cover Preamplifier Type 2670-W-001 if used at a supply voltage >40 V



| Type No.                          |          | 2670-WB-1419                       | 2671                               | 2671-W-001                         | 2673                           | 2695                         | 2699                               |
|-----------------------------------|----------|------------------------------------|------------------------------------|------------------------------------|--------------------------------|------------------------------|------------------------------------|
| Diameter                          | inch     | 1/4                                | 1/2                                | 1/2                                | 1/2                            | 1/2                          | 1/2                                |
| Optimized                         |          | Airbag                             | CCLD                               | CCLD                               | Calibration                    | Short CCLD                   | CCLD                               |
| Connector at Preamplifier         |          | Fixed (2 m) cable                  | BNC                                | BNC                                | LEMO 0B, 7-pin                 | 10–32 UNF                    | BNC                                |
| Connector at Instrument Cable     |          | LEMO 1B, 7-pin                     | N/A                                | None                               | LEMO 1B, 7-pin                 | N/A                          | N/A                                |
| Calibration Facility              |          | None                               | None                               | None                               | IVC                            | 10–32 UNF                    | BNC                                |
| Polarization Voltage Support      |          | Yes                                | No                                 | No                                 | Yes                            | No                           | No                                 |
| Supply Voltage                    | V        | ±14 to ±60<br>or 28 to 120         | 28                                 | 28                                 | ±14 to ±60<br>or 28 to 120     | 28                           | 28                                 |
| Max. Output Voltage (Peak)        | V        | 55<br>(10 below supply)            | 7                                  | 7                                  | 55<br>(10 V below supply)      | 7                            | 7                                  |
| Max. Output Current (Peak)        | mA       | 20                                 | 19                                 | 19                                 | 19                             | 19                           | 18                                 |
| Frequency Range                   | Hz       | 1 to 100000<br>±1 dB (6.2 pF)      | 20 to 50000<br>±2 dB (12 pF)       | 3 to 50000<br>2 dB (12 pF)         | 3 to 200000<br>±0.5 dB (20 pF) | 20 to 50000<br>±2 dB (15 pF) | A-weighted to<br>IEC 61672 Class 1 |
| Attenuation                       | dB       | 11                                 | <0.35                              | <0.35                              | <0.05                          | <0.2                         | 0, ±0.3 dB at<br>1 kHz             |
| Noise A-weighted, typical         | µV       | 4                                  | 4                                  | 2                                  | 1.8                            | 4                            | 8 Max., LIN                        |
| Noise 22.4 Hz to 300 kHz, typical | µV       | 14                                 | 15                                 | 4                                  | 11                             | 12                           | N/A                                |
| Input Impedance                   | GΩ    pF | 15    15                           | 1.5    0.4                         | 10    0.4                          | 1    0.05                      | 1.7    0.4                   | 10<br>+20 to 40%    0.5            |
| TEDS UTID                         |          | 1025 from serial<br>number 2264319 | 1025 from serial<br>number 2264319 | 1025 from serial<br>number 2221155 | No                             | 1025                         | 1025                               |



| Type No.                          |          | 2660                                   | 2660-W-001                             |
|-----------------------------------|----------|--|--|
| Diameter                          | inch     | 1/2 and 1/1                            | 1/2                                    |
| Optimized                         |          | Low-noise                              | Low-noise                              |
| Connector at Preamplifier         |          | None                                   | None                                   |
| Connector at Instrument/Cable     |          | B&K, 7-pin                             | B&K, 7-pin                             |
| Calibration Facility              |          | None                                   | None                                   |
| Polarization Voltage Support      |          | Yes                                    | Yes                                    |
| Supply Voltage                    | V        | 120 and 12                             | ±14 to ±16 V                           |
| Max. Output Voltage (Peak)        | V        | 45                                     | 4                                      |
| Max. Output Current (Peak)        | mA       | 1.5                                    | 1.5                                    |
| Frequency Range                   | Hz       | 20 to 200000<br>±1 dB<br>(0 dB)(47 pF) | 20 to 200000<br>±1 dB<br>(0 dB)(47 pF) |
| Attenuation                       | dB       | <0.06                                  | <0.06                                  |
| Noise A-weighted, typical         | µV       | 0.8                                    | 0.8                                    |
| Noise 22.4 Hz to 300 kHz, typical | µV       | 5                                      | 5                                      |
| Input Impedance                   | GΩ    pF | 36    0.3                              | 36    0.3                              |
| TEDS UTID                         |          | No                                     | No                                     |

## Replacing Discontinued Brüel & Kjær Preamplifiers

Modern (Falcon Range) preamplifiers have several advantages over the older types, for example, with respect to parameters, settling time, noise immunity, physical size and connectors.

The table below can be helpful if you need a replacement for an older Brüel & Kjær type.

| Older Preamplifier Types | Recommended Replacement Preamplifier Types |
|--------------------------|--|
| 2619                     | 2669                                       |
| 2627                     | 2673                                       |
| 2633                     | 2670                                       |
| 2639                     | 2669                                       |
| 2645                     | 2673                                       |

# MICROPHONE CALIBRATION

The most important parameter for any measurement device is sensitivity. The sensitivity can be defined as the ratio of the output quantity to the input quantity. To determine the sensitivity is to calibrate the measurement device.

- To verify the stability of the measurement equipment, including equipment used to perform calibration
- To account for local measurement conditions, for example, variations in ambient pressure and temperature
- To ensure product quality
- To build confidence in measurement results

A calibration is performed:

- To ensure that your measurements are correct
- To prove that measurement methods and the equipment used are accurate, for example, to prove that a measurement complies with the requirements of national legislation, standard bodies or customers

## Calibrators



| Type No.                            |              | 4231  | 4226  | 4228   | 4229   |
|-------------------------------------|--------------|---|---|--|--|
| <b>Description</b>                  |              | Sound Calibrator  | Multifunction Acoustic Calibrator               | Pistonphone                                  | Hydrophone Calibrator                            |
| <b>Standards</b>                    |              | EN/IEC 60942 (2003) Class LS* and Class 1 ANSI S1.40–1984 | EN/IEC 60942 (1988) Class 1 ANSI S1.40–1984     | EN/IEC 60942 (1988) Class 1† ANSI S1.40–1984 | –  |
| <b>Nominal Sound Pressure Level</b> | dB re 20 µPa | 94 and 114  | 94, 104 and 114                                 | 124  | From 151 to 166, depending on hydrophone         |
| <b>Calibration Frequencies</b>      | Hz           | 1000  | 31.5 Hz to 16 kHz in octave steps plus 12.5 kHz | 251.2  | 251.2  |
| <b>Level Accuracy</b>               | dB           | ±0.2‡   | ±0.2 (at 94 dB, 1 kHz)                          | ±0.2‡  | ±0.7   |
| <b>Transducer</b>                   |              | 1-inch and 1/2-inch (1/4-inch and 1/8-inch with adaptor)  | 1/2-inch and 1/4-inch                           | 1-inch, 1/2-inch, 1/4-inch and 1/8-inch      | Fits Types 8100, 8101, 8103, 8104, 8105 and 8106 |

\* Type 4231 conforms with Class LS tolerances over the full temperature range from –10 to +50 °C

† Type 4228 specifications meet the class LS/C requirements of IEC 60942 (2003). Formal type approval awaits new edition of the standard.

‡ Maximum deviation from nominal sound pressure level. Deviation from individually calibrated level is less than 0.09 dB.

# Sound Intensity Calibrators

Requirements for laboratory and field use are different. Brüel & Kjær, therefore, offers two instruments for sound intensity calibration:

- **Type 3451-A** for laboratory use
- **Type 4297** for field use

Both calibrators fulfil IEC 61043, 1993 Class 1.



| Type No.                               |             | 3541-A  | 4297  |
|--|-------------|---|---|
| Main Application                       |             | In the laboratory                               | In the field  |
| Dismantling of Probe                   |             | Necessary                                       | Unnecessary (up to 3 kHz)                               |
| Calibration of Sound Intensity Level   | $L_I$       | Yes   | No  |
| Calibration of Sound Pressure Level    | $L_p$       | Yes   | Yes   |
| Calibration of Particle Velocity Level | $L_v$       | Yes   | No  |
| Pressure-Residual Intensity Index      | $L_p - L_I$ | 250 Hz  | 20 to 3 kHz with spacer<br>20 to 6.3 kHz without spacer |
| Spacings Accommodated                  |             | Irrelevant as spacer must be removed from probe | Probe must be based on 12 mm spacer                     |
| Sound Pressure Source                  |             | Separate pistonphone                            | Integrated  |
| Noise Generator                        |             | Sine tone at 250 Hz                             | Integrated pink noise generator                         |
| Microphones Accommodated               | inch        | 1/4 and 1/2                                     | 1/2   |
| Number of Mechanical Parts             |             | 4   | 1   |

# Adaptors for Calibration

|                                |  |
|--------------------------------|--|
| DP-0776                        | Adaptor for 1/2-inch microphones<br>Use with Type 4228   |
| DP-0775                        | Adaptor for 1/4-inch microphones<br>Use with Types 4228 and 4231                               |
| DP-0774                        | Adaptor for 1/8-inch microphones<br>Use with Types 4228 and 4231                               |
| DP-0888                        | Adaptor for checking sound intensity probes with Type 4231, sound pressure level 97 dB ±0.7 dB |
| DP-0977                        | Adaptor (for un-flanged surface microphone)  |
| DP-0978                        | Adaptor for Type 4101-A  |
| DP-0979                        | Adaptor for flush-mounted surface microphone   |
| DB-4009                        | 1/4-inch Adaptor for UA-0033   |
| DB-4010                        | 1/8-inch Adaptor for UA-0033   |
| UC-0210                        | 1/2-inch Adaptor for Type 4231   |
| DB-4121                        | 1/2-inch Adaptor for Type 4961   |
| DB-4199                        | Adaptor for Acoustic Calibrator Type 4226<br>Use with Types 4184 and 4184-A                    |
| <b>Electrostatic Actuators</b> |  |
| UA-0023                        | For 1-inch microphones   |
| UA-0033                        | For 1/2-inch microphones   |
| UA-1639                        | For calibration of surface microphones   |
| <b>Actuator Adaptors</b>       |  |
| DB-0264                        | For 1/4-inch microphones<br>Use with UA-0033   |
| DB-0900                        | For 1/8-inch microphones<br>Use with UA-0033   |



DP-0776



DP-0775



DP-0774



DP-0977



DP-0978



DP-0979



UA-0023



UA-0033



UA-1639



DB-0264



DB-0900

# MORE ABOUT MICROPHONES

## TEDS Microphones

A TEDS microphone consists of a microphone cartridge and its preamplifier with a memory chip, sealed to form one unit called the TEDS microphone.

### TEDS Templates

The TEDS template defines the memory mapping of the TEDS chip and hence the “understanding” between transducer and front end.

A number of TEDS templates have been standardized by the IEEE and in addition to this a number of non-standard vendor-specific templates exist. The different TEDS templates are differentiated by different ID numbers. At the moment Brüel & Kjær uses the following templates for TEDS microphones and preamplifiers.

IEEE P1451.4 V.0.9 – TEDS Templates\*

| UTID No. | Name   | Remarks  |
|----------|--|--|
| 769      | Microphone with integrated preamplifier                      | Used for most TEDS microphones   |
| 1025     | Microphone preamplifier                                      | Used for most TEDS microphone preamplifiers  |
| 116289   | Microphone with integrated preamplifier extended sensitivity | Used in special cases like low-sensitivity microphones or reference frequency not 250 Hz |

IEEE 1451.4 V.1.0 – TEDS Templates

| UDID No.   | Name  | Remarks  |
|------------|---|--|
| 127-0-0-0U | Microphone with integrated preamplifier, V.1.0                    | This template is without transfer function<br>Replaces UTID 769 and 116289   |
| 127-0-0-1U | Microphone with integrated preamplifier, transfer function, V.1.0 | Same as UDID 127-0-0-0U but with transfer function<br>Replaces UTID 34013408 |

\* Default template for most Brüel & Kjær TEDS microphones

| Microphone Type No.     | Cartridge Diameter (in) | Data CD | Field* | Preamplifier Type No. | Input Type | Adaptor | Sensitivity (dB re 1 V/Pa) | Sensitivity (mV/Pa) | ±2 dB Frequency Range (Hz) | Noise floor (dBA) | Max. SPL (dB) |
|-------------------------|-------------------------|---------|--------|-----------------------|------------|---------|----------------------------|---------------------|----------------------------|-------------------|---------------|
| 4138-A-015              | 1/8                     | No      | P      | 2670                  | Classical  | UA-0160 | -65                        | 0.55                | 6.5 to 140 k               | 52.2              | 168           |
| 4138-C-006              | 1/8                     | No      | P      | 2669-C                | Classical  | UA-0036 | -62                        | 0.79                | 6.5 to 140 k               | 52.2              | 168           |
| 4138-L-006              | 1/8                     | No      | P      | 2669-L                | Classical  | UA-0036 | -62                        | 0.79                | 6.5 to 140 k               | 52.2              | 168           |
| 4188-A-021              | 1/2                     | No      | F      | 2671                  | CCLD       |         | -30                        | 31.6                | 20 to 12.5 k               | 19                | 138           |
| 4188-C-001              | 1/2                     | No      | F      | 2669-C                | Classical  |         | -30                        | 31.6                | 8 to 12.5 k                | 15.8              | 146           |
| 4188-L-001              | 1/2                     | No      | F      | 2669-L                | Classical  |         | -30                        | 31.6                | 8 to 12.5 k                | 15.8              | 146           |
| 4189-A-021              | 1/2                     | Yes     | F      | 2671                  | CCLD       |         | -26                        | 48                  | 20 to 20 k                 | 16.5              | 134           |
| 4189-A-031              | 1/2                     | Yes     | F      | 2699                  | CCLD       |         | -26                        | 48                  | 6.3 to 20 k                | 18                | 130           |
| 4189-B-001 <sup>†</sup> | 1/2                     | Yes     | F      | 2669-B                | Classical  |         | -26                        | 49                  | 6.3 to 20 k                | 15.2              | 146           |
| 4189-C-001              | 1/2                     | Yes     | F      | 2669-C                | Classical  |         | -26                        | 49                  | 6.3 to 20 k                | 15.2              | 146           |

To find out more about TEDS, see [Implementation of TEDS](#).

## Common Specifications

For detailed specifications, please see the product data for the individual components (microphone or preamplifier). Unless otherwise stated, all specifications are valid under the following conditions:

- CCLD input types: 24 to 28 V compliance voltage
- Classical input types: 80 V DC supply<sup>†</sup>
- Dynamic range low limit: Noise floor dBA
- Max. SPL dB: The 3% distortion limit in dB SPL RMS rounded to nearest integer. The undistorted peak level will normally be 3 dB higher
- Cartridge sensitivity: Nominal
- TEDS microphone sensitivity: Stated as the nominal cartridge sensitivity except for 1/4-inch and 1/8-inch cartridges where the loaded sensitivity differs considerably from the open-circuit sensitivity

### Temperature Range

The read/write temperature range of the TEDS chip is guaranteed by the chip manufacturer up to +85 °C only (+185 °F), but the TEDS chip will survive the full specified temperature range of the TEDS microphone/preamplifier without any damage.

### Cable Length

TEDS is guaranteed to work properly with a cable length up to 100 m (328 ft).

<sup>†</sup> If, for example, the supply voltage to a classical preamplifier is reduced from 80 V to 28 V or ±14 V, the maximum SPL may theoretically be reduced by up to 15.7 dB

| Microphone Type No. | Cartridge Diameter (in) | Data CD | Field* | Preamplifier Type No. | Input Type | Adaptor | Sensitivity (dB re 1 V/Pa) | Sensitivity (mV/Pa) | ±2 dB Frequency Range (Hz) | Noise floor (dBA) | Max. SPL (dB) |
|---------------------|-------------------------|---------|--------|-----------------------|------------|---------|----------------------------|---------------------|----------------------------|-------------------|---------------|
| 4189-H-041          | 1/2                     | Yes     | F      | 1706                  | CCLD       |         | -26                        | 48                  | 6.3 to 20 k                | 16.5              | 134           |
| 4189-L-001          | 1/2                     | Yes     | F      | 2669-L                | Classical  |         | -26                        | 49                  | 6.3 to 20 k                | 15.2              | 146           |
| 4189-W-003          | 1/2                     | Yes     | F      | 2671-W-001            | CCLD       |         | -26                        | 48                  | 6.3 to 20 k                | 16.5              | 134           |
| 4190-B-001†         | 1/2                     | Yes     | F      | 2669-B                | Classical  |         | -26                        | 48                  | 3.15 to 20 k               | 15                | 148           |
| 4190-C-001          | 1/2                     | Yes     | F      | 2669-C                | Classical  |         | -26                        | 48                  | 3.15 to 20 k               | 15                | 148           |
| 4190-L-001          | 1/2                     | Yes     | F      | 2669-L                | Classical  |         | -26                        | 48                  | 3.15 to 20 k               | 15                | 148           |
| 4190-L-002          | 1/2                     | Yes     | F      | 2669-L                | Classical  |         | -26                        | 48                  | 3.15 to 20 k               | 15                | 148           |
| 4191-B-001†         | 1/2                     | Yes     | F      | 2669-B                | Classical  |         | -38                        | 12                  | 3.15 to 40 k               | 21.4              | 162           |
| 4191-C-001          | 1/2                     | Yes     | F      | 2669-C                | Classical  |         | -38                        | 12                  | 3.15 to 40 k               | 21.4              | 162           |
| 4191-L-001          | 1/2                     | Yes     | F      | 2669-L                | Classical  |         | -38                        | 12                  | 3.15 to 40 k               | 21.4              | 162           |
| 4192-B-001†         | 1/2                     | Yes     | P      | 2669-B                | Classical  |         | -38                        | 12                  | 3.15 to 20 k               | 20.7              | 162           |
| 4192-C-001          | 1/2                     | Yes     | P      | 2669-C                | Classical  |         | -38                        | 12                  | 3.15 to 20 k               | 20.7              | 162           |
| 4192-L-001          | 1/2                     | Yes     | P      | 2669-L                | Classical  |         | -38                        | 12                  | 3.15 to 20 k               | 20.7              | 162           |
| 4193-B-004†         | 1/2                     | Yes     | P      | 2669-B                | Classical  | UC-0211 | -54                        | 2                   | 0.13 to 20 k               | 29                | 148           |
| 4193-C-004          | 1/2                     | Yes     | P      | 2669-C                | Classical  | UC-0211 | -54                        | 2                   | 0.13 to 20 k               | 29                | 148           |
| 4193-L-004          | 1/2                     | Yes     | P      | 2669-L                | Classical  | UC-0211 | -54                        | 2                   | 0.13 to 20 k               | 29                | 148           |
| 4938-A-011          | 1/4                     | Yes     | P      | 2670                  | Classical  |         | -57                        | 1.4                 | 4 to 70 k                  | 42                | 172           |
| 4938-C-002          | 1/4                     | Yes     | P      | 2669-C                | Classical  | UA-0035 | -57                        | 1.4                 | 4 to 70 k                  | 42                | 172           |
| 4938-L-002          | 1/4                     | Yes     | P      | 2669-L                | Classical  | UA-0035 | -57                        | 1.4                 | 4 to 70 k                  | 42                | 172           |
| 4939-A-011          | 1/4                     | Yes     | F      | 2670                  | Classical  |         | -49                        | 3.8                 | 4 to 100 k                 | 35                | 164           |
| 4939-C-002          | 1/4                     | Yes     | F      | 2669-C                | Classical  | UA-0035 | -49                        | 3.6                 | 4 to 100 k                 | 35                | 164           |
| 4939-L-002          | 1/4                     | Yes     | F      | 2669-L                | Classical  | UA-0035 | -49                        | 3.6                 | 4 to 100 k                 | 35                | 164           |
| 4941-A-011          | 1/4                     | No      | P      | 2670                  | Classical  |         | -82                        | 0.08                | 4 to 20 k                  | 73.5              | 184           |
| 4941-C-002          | 1/4                     | No      | P      | 2669-C                | Classical  | UA-0035 | -82                        | 0.08                | 4 to 20 k                  | 75.8              | 184           |
| 4942-A-021          | 1/2                     | Yes     | D      | 2671                  | CCLD       |         | -26                        | 50                  | 20 to 16 k                 | 18                | 134           |
| 4942-A-031          | 1/2                     | Yes     | D      | 2699                  | CCLD       |         | -26                        | 50                  | 6.3 to 16 k                | 18                | 130           |
| 4942-B-001†         | 1/2                     | Yes     | D      | 2669-B                | Classical  |         | -26                        | 50                  | 6.3 to 16 k                | 15.2              | 146           |
| 4942-C-001          | 1/2                     | Yes     | D      | 2669-C                | Classical  |         | -26                        | 50                  | 6.3 to 16 k                | 15.2              | 146           |
| 4942-H-041          | 1/2                     | Yes     | D      | 1706                  | CCLD       |         | -26                        | 50                  | 6.3 to 16 k                | 18                | 134           |
| 4942-L-001          | 1/2                     | Yes     | D      | 2669-L                | Classical  |         | -26                        | 50                  | 6.3 to 16 k                | 15.2              | 146           |
| 4943-B-001†         | 1/2                     | Yes     | D      | 2669-B                | Classical  |         | -26                        | 50                  | 3.15 to 10 k               | 15.9              | 148           |
| 4943-C-001          | 1/2                     | Yes     | D      | 2669-C                | Classical  |         | -26                        | 50                  | 3.15 to 10 k               | 15.9              | 148           |
| 4943-L-001          | 1/2                     | Yes     | D      | 2669-L                | Classical  |         | -26                        | 49                  | 3.15 to 10 k               | 15.9              | 148           |
| 4944-A/B            | 1/4                     | Yes     | P      | Integral              | CCLD       |         | -61                        | 0.9                 | 16 to 70 k                 | 48                | 169           |
| 4954-A/B            | 1/4                     | Yes     | F      | Integral              | CCLD       |         | -51                        | 2.8                 | 16 to 80 k                 | 40                | 159           |
| 4954-A-011          | 1/4                     | Yes     | F      | 2670                  | Classical  |         | -50.5                      | 3                   | 4 to 80 k                  | 35                | 164           |
| 4955                | 1/2                     | Yes     | F      | Integral              | Classical  |         | 0.8                        | 1100                | 10 to 16 k                 | 6.5               | 110           |
| 4955-A              | 1/2                     | Yes     | F      | Integral              | Classical  |         | 0.8                        | 1100                | 10 to 16 k                 | 6.5               | 110           |
| 4956-W-001          | 1/2                     | Yes     | P      | 2671-W-001            | CCLD       |         | -38                        | 12.5                | 3 to 20 k                  | 26.5              | 135           |
| 4957                | 1/4                     | No      | F      | Integral              | CCLD       |         | -39                        | 11.2                | 50 to 10 k                 | 32                | 134           |
| 4958                | 1/4                     | No      | F      | Integral              | CCLD       |         | -39                        | 11.2                | 10 to 20 k                 | 28                | 140           |
| 4959                | 1/4                     | No      | P      | Integral              | CCLD       |         | -39                        | 11.2                | 50 to 20 k                 | 32                | 134           |
| 4961                | 1/4                     | Yes     | M      | Integral              | CCLD       |         | -24.4                      | 60                  | 12 to 20 k                 | 20                | 130           |

\* P = Pressure, F = Free, D = Diffuse and M = Multi-field

# Microphone Verification and Calibration

## Charge Injection Calibration (CIC)

This is a Brüel & Kjær patented method for in situ verification of the integrity of the entire measurement chain, for example, microphone, preamplifier and cabling. Even microphones remote from the input stage/conditioning amplifier can be verified. The basic philosophy behind CIC is that if we have a known condition (for example, a properly calibrated microphone) and establish a reference measurement, then as long as the reference value does not change, nothing has changed and the microphone calibration will still be valid. Additionally CIC verifies the cable and preamplifier. Furthermore, if an error occurs, then the change in the CIC signal will very often clearly indicate which kind of problem causes the error.

The CIC technique is a great improvement over the traditional insert voltage calibration method which virtually ignores the state of the microphone. The CIC technique is very sensitive to any change in the microphone's capacitance, which is a reliable indicator of the microphone's condition.

The technique works by introducing a small but accurately defined capacitance  $C_c$  (typically 0.2 pF) with a very high leakage resistance (greater than 50000 G $\Omega$ ) into the circuit of the preamplifier, see figure to the right.  $C_i$  and  $R_i$  represent the preamplifier's high input impedance and  $g$  its gain (= 1).


For a given calibration signal  $e_i$ , the output  $e_o$  of this arrangement will change considerably, even for small changes in the microphone's capacitance  $C_m$ . The CIC technique is about 100 times more sensitive than the insert voltage calibration. In the extreme case where there is a significant leakage between the microphone's diaphragm and its back plate ( $C_m$  becomes very large), the output signal will change by tens of decibels compared with only tenths of a decibel using the insert voltage method.

Another important CIC feature is that, unlike the insert voltage technique, it is far less sensitive to external electrical fields.

## Insert Voltage Calibration (IVC)

This method was originally developed for calibration of the open-circuit voltage sensitivity of microphones and, for this purpose, it is still the best method. IVC requires a special preamplifier and will not detect microphone changes as easily as the CIC method.

Charge injection calibration

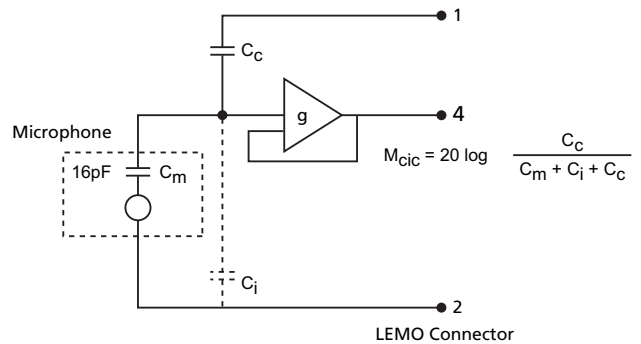

## How to Perform CIC

The CIC method can be used to monitor the measurement system at all frequencies covered by the system.

Use low frequencies to observe changes in the preamplifier input resistance or additional leakage.

Use the mid-frequency range, for example, around 1 kHz to check for changes to the microphone capacitance. The CIC output is essentially inversely proportional to the microphone capacitance.

Check the high-frequency attenuation (above 10 kHz) to monitor for changes in the microphone resonance.

## When Can CIC be Used?

CIC requires use of a preamplifier and a cable that supports CIC plus a front-end input that allows CIC measurement. If the power supply does not support CIC, Brüel & Kjær can supply adaptors to inject the CIC signal:

- WB-0850 for a B&K connector
- UA-1405 for a LEMO connector

CIC is not possible when using preamplifiers with CCLD output.

Brüel & Kjær's PULSE platform and the NEXUS range of conditioning amplifiers support CIC for the microphone inputs.

## Calibration

The microphone and the entire measurement chain must be calibrated at regular intervals. The calibration provides traceability and proven accuracy to your system. The intention behind CIC is not to replace the calibration, but to enable you to extend the calibration interval.



# MICROPHONE AND PREAMPLIFIER EXTENSION CABLES

The best connection between A and B is a cable from Brüel & Kjær. A quality cable is so much more than just an electrical connection between two points. Cables from Brüel & Kjær are carefully selected and designed in order to offer excellent electrical properties such as high screening and low capacitance combined with maximum strength and flexibility for easy handling.

Our most popular cables are marked with **◆**. These offer the best delivery times and prices.

| Item No.  | Connector A-end   | Connector B-end       | Raw Cable                  | Description  |
|-----------|-------------------|-----------------------|----------------------------|--|
| ◆ AO-0414 | LEMO 1B, Female   | LEMO 1B, Male         | AC-0289                    | Most popular extension cable for classical preamplifier and microphone input. Also fits directly in preamplifiers with cylindrical houses.<br>PUR cable<br>-20 to +80 °C |
| ◆ AO-0419 | LEMO 0B, Female   | LEMO 1B, Male         | AC-0219                    | Preamplifier Cable<br>Silicone Cable<br>-60 to +150 °C<br>Suits only Types 2669 and 2673 with tapered house  |
| ◆ AO-0428 | LEMO 0B, Female   | 7-pin B&K, Male       | AC-0219                    | From current classical preamplifier with tapered house to B&K input<br>Silicone cable<br>-60 to +150 °C  |
| AO-0027   | 7-pin B&K, Female | 7-pin B&K, Male       | AC-0289                    | From old Brüel & Kjær preamplifier to B&K input.<br>Single-screened<br>PUR cable<br>-20 to +80 °C  |
| ◆ AO-0028 | 7-pin B&K, Female | 7-pin B&K, Male       | Double-screened<br>AC-3028 | Similar to AO-0027, but with double-screened cable<br>PVC<br>-20 to +80 °C   |
| ◆ AO-0488 | 7-pin B&K, Female | LEMO 1B, Male         | AC-0289                    | Connects older Brüel & Kjær systems to modern input<br>PUR cable<br>-20 to +80 °C  |
| ◆ AO-0645 | LEMO 1B, Female   | LEMO 1B, 10-pin, Male | AC-0289                    | Connects classical microphone preamplifiers to sound level meter and other inputs (for example, Types 2250, 2270 and 3639)<br>PUR cable<br>-20 to +80 °C                 |



| Item No.  | Connector A-end           | Connector B-end           | Raw Cable | Description   |
|-----------|---------------------------|---------------------------|-----------|---|
| AO-0479   | LEMO 1B, Male             | BNC, Male                 | AC-0289   | Microphone front end input cable<br>Only LEMO pin 2 and 4 are connected to BNC, LEMO pin 2 is GND<br>PUR cable<br>-20 to +80 °C |
| AO-0537   | 7-pin B&K, Female         | LEMO 1B, Male             | AC-0289   | Adaptor cable – use only with Types 2633 and 2639<br>PUR cable<br>-20 to +80 °C   |
| WL-3185   | 7-pin B&K, Female         | BNC, Male                 |           | Adaptor cable, 0.6 m (2 ft)   |
| AO-0463   | 10–32 UNF, Male           | 10–32 UNF, Male           | AC-0208   | Economy cable<br>PVC<br>-20 to +70 °C   |
| AO-0563   | SMB (right angle), Female | SMB (right angle), Female | RG-174    | When you need right angle SMB in both ends<br>-10 to +80 °C   |
| AO-0564   | SMB (right angle), Female | BNC, Male                 | RG-174    | Where space is limited, right angle SMB and BNC<br>-10 to +80 °C  |
| ◆ AO-0587 | SMB, Female               | BNC, Male                 | AC-0189   | For use with array microphones<br>PVC cable<br>-20 to +70 °C  |
| AO-0687   | 10–32 UNF, Male           | 10–32 UNF, Male           | AC-0005   | Super cable with extensive connector relief<br>PFA cable<br>-40 to +120 °C  |



| Item No. | Connector A-end   | Connector B-end       | Raw Cable           | Description  |
|----------|-------------------|-----------------------|---------------------|--|
| AO-0087  | BNC, Male         | BNC, Male             | AC-0006             | General purpose coaxial cable with BNC single screened 50 Ω  |
| AO-0426  | BNC, Male         | BNC, Male             | AC-0299             | General purpose coaxial cable with BNC, double-screened 50 Ω   |
| AO-0531  | 10–32 UNF, Male   | BNC, Male             | AC-0208             | For surface microphones or 1/4-inch TEDS microphones with 10–32 UNF PVC cable<br>–20 to +70 °C                     |
| AO-0699  | SMB, Female       | 10–32 UNF             | AC-0005             | Low-noise, single-screened coaxial cable<br>PFA cable  |
| AR-0014  | LEMO 1B, Female   | LEMO 1B, Male         | Shielded flat cable | Signal routing through closed doors and windows<br>0.2 mm thick  |
| WL-1287  | LEMO 1B, Female   | LEMO 1B, 10-pin, Male | AC-0289             | Connects Type 4182 to sound level meters, for example Types 2250 and 2270, SLM input<br>PUR cable<br>–20 to +80 °C |
| WL-1302  | 7-pin B&K, Female | LEMO 1B, Male         | AC-0289             | Adaptor cable, Type 2660-W-001 to PULSE or NEXUS<br>Maximum ±16 V DC supply<br>PUR cable<br>–20 to +80 °C          |
| EL-4023  | 7-pin B&K, Female | LEMO 1B, 10-pin, Male |                     | Cable for Type 4182 to 10-pin LEMO connector   |



| Item No. | Connector A-end   | Connector B-end      | Raw Cable | Description   |
|----------|-------------------|----------------------|-----------|---|
| EL-4025  | 7-pin B&K, Female | LEMO-1B, 7-pin, Male | AC-0289   | PUR<br>-20 to +80 °C<br>Connection cable for Type 5935-L                              |
| WL-1260  | 7-pin B&K, Female | LEMO 7-pin, Male     | AC-0289   | PUR<br>-20 to +80 °C<br>With built-in overvoltage protection for Hydrophone Type 8106 |



## Raw Cables

This table provides information about the raw cables used for a number of Brüel & Kjær extension cables. Note that the temperature range for a cable with connectors can be limited compared with the specifications for the raw cable.

| Raw Cable | Ø mm | Jacket               | Colour | Temperature Range, °C | Centre Conductor            | Z ohms | pF/m | Description  |
|-----------|------|----------------------|--------|-----------------------|-----------------------------|--------|------|--|
| AC-0005   | 2    | PFA                  | Black  | -75 to +250           | Silver-plated steel 0.25 mm | 50     | 105  | Special coaxial cable with low triboelectric noise       |
| AC-0079   | 3.8  | PUR                  | Grey   | -50 to +70            | 7 × 0.10 mm <sup>2</sup>    |        | 115  | Special braided shield microphone cable                  |
| AC-0006   | 4.95 | PVC II Low migration | Black  | -25 to +85            | 19 × 0.1 mm                 | 50     | 101  | Single shielded, braided 96% coaxial cable               |
| AC-0208   | 2.1  | PVC                  | Grey   | -20 to +80            | 2 × 0.1 Ø                   | 50     | 95   | Single shielded, braided 86% coaxial cable               |
| AC-0219   | 4    | Silicone             | Grey   | -25 to +180           | 7 × 0.06 mm <sup>2</sup>    |        | 90   | Special braided shield microphone cable                  |
| AC-0289   | 4.2  | PUR                  | Black  | -30 to +70            | 10 × 0.04 mm <sup>2</sup>   |        | 95   | Special braided shield microphone cable                  |
| AC-0299   | 5.4  | PVC II Low migration | Black  | -25 to +85            | 0.88 mm                     | 50     | 101  | Double shielded, braided 96% coaxial cable               |
| AC-3028   | 9    | PVC                  | Grey   | -10 to +70            | 8 × 0.5 mm <sup>2</sup>     |        |      | Cable hybrid 8 × 0.5 mm <sup>2</sup> + 1 × coaxial cable |
| AC-0043   | 3.1  | FEP                  | White  | -55 to +200           | Silver-plated steel 0.29 mm | 50     | 100  | Low-noise double-screen                                  |
| AC-0034   | 9.9  | Polychloroprene      | Black  | -40 to +80            | 2 × 18 AWG                  |        |      | Single shielded hydrophone MIL-C-915 cable               |
| AC-0101   | 11.5 | Polychloroprene      | Black  | -35 to +85            | 4 × 1 mm <sup>2</sup>       |        |      | Single shielded hydrophone cable                         |

# More About Cables

## Cable Length and Current Limitations

Brüel & Kjær preamplifiers can drive very long cables. The cable length is limited though by the available output current of the preamplifier, especially in situations where high-frequency signals must be measured at high levels.

The maximum sound pressure level ( $L_{p, peak}$ ) that can be measured with the combination of available current, cable load, frequency content of signal and microphone sensitivity can be calculated with the following expression:

$$L_{p, peak} = 94 + 20 \log \left( \frac{i_{peak}}{2 \cdot \pi \cdot f_{max} \cdot C_L \cdot 1Pa \cdot S_C} \right) [dB]$$

where:

$i_{peak}$  = maximum available peak current, either the preamplifier's maximum output current or the supply current minus the preamplifier's current consumption, whichever is the smallest

$f_{max}$  = maximum frequency in the signal

$C_L$  = total capacitive load presented by the connection cable in farad (F). The load is calculated by multiplying the cable length in metres with the cable capacitance in F per metre

$S_C$  = loaded sensitivity of the microphone in V/Pa (nominal sensitivity)

The following examples illustrate the use of the above equation.

### Example 1:

Using a PULSE module with CCLD Microphone Preamplifier Type 2671, Prepolarized Free-field, 1/2-inch Microphone Type 4188 and 100 m of 95 pF/m cable:

$$i_{peak} = 4 \text{ mA} - 1 \text{ mA} = 3 \text{ mA}$$

$$C_L = 95 \text{ pF/m} \times 100 \text{ m} = 9.5 \text{ nF}$$

$$S_C = 31.6 \text{ mV/Pa}$$

$$f_{max} = 10000 \text{ Hz}$$

$$L_{p, peak} = 94 + 20 \log \left( \frac{0.003}{2 \cdot \pi \cdot 10000 \cdot 9.5 \cdot 10^{-9} \cdot 1Pa \cdot 0.0316} \right) = 138 \text{ dB}$$

### Example 2:

Using a PULSE module with 1/2-inch Microphone Preamplifier Type 2669, 1/2-inch Free-field Microphone Type 4191 and 1000 m of 95 pF/m cable:

$$i_{peak} = 20 \text{ mA} - 3 \text{ mA} = 17 \text{ mA}$$

$$C_L = 95 \text{ pF/m} \times 1000 \text{ m} = 95 \text{ nF}$$

$$S_C = 12.5 \text{ mV/Pa}$$

$$f_{max} = 20000 \text{ Hz}$$

$$L_{p, peak} = 94 + 20 \log \left( \frac{0.017}{2 \cdot \pi \cdot 20000 \cdot 95 \cdot 10^{-9} \cdot 1Pa \cdot 0.0125} \right) = 135 \text{ dB}$$

**Note:** The maximum peak sound pressure level for shorter cables may be limited by the available voltage and the preamplifiers maximum slew rate. Further details about the limitations due to voltage, current, and slew rate of the preamplifiers can be found in Brüel & Kjær's [Microphone Handbook](#).

## Cable Bending Radius

As a rule of thumb the bending radius should be more than 15 times the cable diameter.


## Popular Connectors Used in Acoustic Measurements

Older Brüel & Kjær equipment traditionally used a proprietary B&K coaxial connector JP-0101 and the famous B&K 7-pin microphone plugs for the preamplifier input.

Due to the long lifetime and high stability of Brüel & Kjær instruments, thousands of instruments using these traditional connectors are still on the market, and we still supply extension cables and adaptors that connect these instruments to newer types of transducers.

Eventually, these older connectors were replaced by the LEMO 7-pin connector (for classical microphone input), and the industry standard BNC connector for signal input/output. BNC connectors are also a popular choice for CCLD preamplifiers.

Another popular coaxial connector (originating from the vibration world) is the 10–32 UNF, also called the "Microdot" connector. The 10–32 UNF is especially popular where vibration can be expected. SMB type connectors are often encountered in multichannel systems, where space around the connector is limited, for example, in array solutions.

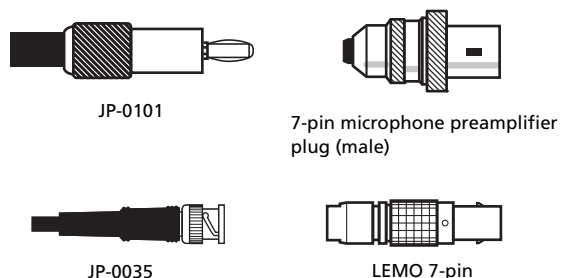

# MICROPHONE ACCESSORIES

## Adaptors

### Adaptors for Mounting Preamplifiers and Extension Rods with Microphones of Different Diameters

|         |   |
|---------|---|
| UA-0786 | 1-inch microphone to 1/2-inch preamplifier, Insert Voltage possibility                              |
| DB-0375 | 1-inch microphone to 1/2-inch preamplifier  |
| UA-0035 | 1/4-inch microphone to 1/2-inch preamplifier (driven shield 0.33 pF)<br>Length = 72.5 mm            |
| WA-0371 | 1/4-inch microphone to 1/2-inch preamplifier, short version (driven shield 0.08 pF), Length = 32 mm |
| WA-0406 | 1/8-inch microphone to 1/2-inch preamplifier  |
| UA-0036 | 1/8-inch microphone to 1/2-inch preamplifier (driven shield 0.46 pF)                                |
| UA-0160 | 1/8-inch microphone to 1/4-inch preamplifier (driven shield 2.44 pF)                                |
| UA-1434 | 1/2-inch to 1-inch adaptor  |
| UA-0954 | Extension for 1/4-inch microphone and angle pieces 90°  |
| JJ-0081 | Adaptor BNC, Female to Female   |

### Flexible Adaptors 1/4- to 1/2- inch and Flush Mountings for 1/4- and 1/2-inch Microphones

|         |   |
|---------|---|
| UA-0122 | Right angle (driven shield 1.25 pF)<br>Length = 60 mm |
| UA-0123 | Straight (driven shield 1.25 pF)<br>Length = 60 mm    |

### Flexible Extension Rod

|         |   |
|---------|---|
| UA-0196 | 1/2-inch to 1/2-inch (driven shield 0.22 pF), length = 210 mm |
|---------|---|

### Angle Pieces

|         |   |
|---------|---|
| EU-4000 | 1/4-inch to 1/4-inch (driven shield 0.97 pF), 90° |
| UA-1260 | 1/2-inch to 1/2-inch (80° approximately)          |



UA-0786



DB-0375



UA-0035



WA-0371



WA-0406



UA-0036



UA-0160



UA-0122



UA-0123



JJ-0081



UA-0196



EU-4000



UA-1260

## Corrector

|         |  |
|---------|--|
| DZ-9566 | Random Incidence Corrector gives Types 4176/4188 a flat random-incidence response for measurements in diffuse sound fields |
|---------|--|



# Windscreens

The windscreen is made of specially prepared, open-pored polyurethane foam attenuating wind noise 10 to 12 dB at lower wind velocities, and is suited for hand-held outdoor sound

measurements. The windscreen is simply pushed as far as it will go over the microphone (fitted with its normal protection grid) and preamplifier.

|         |   |
|---------|---|
| UA-1070 | Windscreen for Type 4184  |
| UA-1071 | Windscreen holder for Type 4184                                       |
| UA-0207 | For 1-inch microphones, spherical, diameter 90 mm, hole 20 mm         |
| UA-0237 | For 1/2-inch microphones, spherical, diameter 90 mm, hole 10 mm       |
| UA-0253 | 6 units of UA-0207  |
| UA-0254 | 6 units of UA-0237  |
| UA-0459 | For 1/2-inch microphones, spherical, diameter 65 mm, hole 10 mm       |
| UA-0469 | 6 units of UA-0459  |
| UA-1679 | Upper part with windscreen for Type 4952                              |
| UA-1700 | Windscreen for Type 4952  |
| UA-1701 | 6 units of UA-1700 units  |
| WQ-1099 | For 1/4-inch microphones, spherical, diameter 65 mm, hole 5 mm        |
| WQ-1133 | For 1/4-inch microphones, ellipse 38 x 55 mm, hole 5 mm               |
| DS-0934 | Windscreen for Type 4198/UA-1404                                      |
| UA-0781 | Elliptical Windscreen   |
| UA-0839 | 6 pack UA-0781  |
| UA-1650 | Windscreen auto detect  |
| UA-2133 | Windscreen for boundary layer microphone according to IEC/EN 61400-11 |
| UC-5360 | Bird-spikes for UC-0213   |
| WQ-2842 | Windscreen for 1/4-inch microphone                                    |



# Nose Cones

Nose cones are designed to reduce the aerodynamically induced noise present when the microphone is exposed to high wind speeds in a known direction, for example, during sound measurements in wind tunnels, ducts, etc. They replace the normal protection grid of the microphone, and have a streamlined shape with a highly polished surface giving the least possible resistance to air flow and

thereby reducing the noise produced by the presence of the microphone itself. The fine wire mesh around the nose cone permits sound pressure transmission to the microphone diaphragm while a truncated cone behind the mesh reduces the air volume in front of the diaphragm.

|                   |
|-------------------|
| UA-0387: 1/1-inch |
| UA-0386: 1/2-inch |
| UA-0385: 1/4-inch |
| UA-0355: 1/8-inch |



## Outdoor Protection

|         |  |
|---------|--|
| UA-1404 | Outdoor microphone kit for Preamplifier Types 2669, 2671, 2673 and Sound Level Meter Types 2236, 2250, 2260 and 2270           |
| DB-3611 | Extension for UA-1404: Makes it possible to mount the preamplifier from Sound Level Meter Type 2231 inside Outdoor Kit UA-1404 |
| UA-0308 | Dehumidifier used with back-vented 1/2-inch microphones with nickel diaphragms   |
| UA-0393 | Rain cover with built in actuator  |
| UA-1679 | Upper part with integral windscreen for Type 4952  |
| UC-5360 | Windscreen holder with bird spike for Type 4198/UA-1404  |
| DD-0413 | Rain cover for Type 4952   |



## Preamplifier Holders

|         |  |
|---------|--|
| UA-1317 | Preamplifier holder to be used with 1/2-inch preamplifiers together with a camera tripod. The holder can be swivelled and locked at any angle between +90° and -90° from the vertical<br>Arm: Aluminium, length 303 mm, camera-tripod thread A1/4-20<br>Holder: Rugged polymer, 125 mm |
| UA-1588 | Preamplifier holder to be used with 1/4-inch preamplifiers together with a camera tripod<br>Arm: Aluminium, length 303 mm, camera-tripod thread A1/4-20<br>Holder: Rugged polymer, length 100 mm   |
| UA-0588 | Microphone holder for tripod for Types 2671, 2669-C SLM preamplifiers (1/2-inch preamplifiers)<br>Brass and rugged polymer, max. width 46.5 mm, camera-tripod thread A3/8-16   |
| UA-1284 | Microphone stand for Type 2669-B/L (1/2-inch preamplifier)<br>Brass, height 97.9 mm, max. diameter 50 mm   |
| UA-2129 | Microphone holder for Types 4961, 4944-A, 4954-A, 4957 and 4958 (1/4-inch microphones)<br>Arm: Aluminium, length 303 mm, camera-tripod thread A1/4-20<br>Holder: Aluminium, length 120.1 mm  |



## Tripods

|         |   |
|---------|---|
| UA-0587 | Heavy duty tripod for Type 3923 rotating boom, max. height 1.46 m |
| UA-0801 | Lightweight tripod with tilt head, max. height 1332 mm            |
| UA-0803 | Tripod for photocells and microphones, max. height 1250 mm        |
| UA-0989 | Tripod with pan and tilt head for Type 8329                       |
| UA-1251 | Lightweight tripod for Type 2236, compact, max. height 1.22 m     |
| UA-1577 | Tripod including CAM head   |
| UA-1707 | Tripod adaptor for Type 4952                                      |





# Miscellaneous

|         |   |
|---------|---|
| ZG-0350 | LEMO to 7-pin B&K adaptor for connecting cables with LEMO 1B male connector to instruments with B&K 7-pin connectors    |
| UA-1405 | CIC adaptor, LEMO to B&K similar to ZG-0350 with a BNC to mini-jack cable of 1.5 m to inject charge to the preamplifier |
| WB-0850 | Insert voltage or CIC junction unit 10–32 UNF socket for signal input. Use, for example, cable AO-0038 for signal input |
| ZG-0328 | BNC to B&K 7-pin, provides CCLD supply from microphone 7-pin supply*  |
| WB-1421 | BNC to LEMO, provides CCLD supply from microphone LEMO supply*  |
| WB-1452 | Microdot to LEMO provides CCLD supply from microphone LEMO supply*  |
| JJ-0032 | Adaptor 10–32 UNF (female) to 10–32 UNF (female)  |
| UA-0186 | 25 × JJ-0032  |
| JP-0144 | BNC (female) to B&K coaxial banana (male)   |
| JP-0145 | 10–32 UNF (female) to BNC (male)  |
| UA-0920 | Transmitter adaptor for calibrating Probe Microphone Type 4182  |
| JP-0028 | B&K coaxial to 10–32 UNF  |
| JP-0169 | Grounding terminal to 10–32 UNF connector   |



ZG-0350



UA-1405



WB-0850



ZG-0328



WB-1421



WB-1452



JJ-0032



UA-0920



JP-0144

\* These units require minimum 28 V DC supply from the front end. They cannot be used with PULSE



# SELECTING THE RIGHT COUPLER

Brüel & Kjær's electroacoustic solutions can help you improve your development and manufacturing efficiency in:

- Telephony
- Entertainment systems
- Hearing aids
- Headsets
- Public address systems

Brüel & Kjær's versatile test systems offer a broad range of analysis methods and are designed to ensure reliable and comparable results supporting standardized test, calibration, and documentation procedures. Our wide range of standardized couplers ensures a well-controlled acoustic interface.

The following tables give a quick overview of all Brüel & Kjær transducers optimized for electroacoustic testing.

| Type No.                                  | 4152                                  | 4153                               | 4157   | 4185                                     | 4195                                       | 4195-Q<br>4195-Q-HL0   | 4195-Q-A<br>4195-A-HL0   | 4946                             |
|---|---------------------------------------|------------------------------------|--|--|--|--|--|----------------------------------|
| <b>Description</b>                        | Ear simulator                         | Ear simulator                      | Ear simulator  | Ear simulator for telephonometry         | Wideband ear simulator                     | Wideband ear simulator for production line testing of telephones | Wideband ear simulator for production line testing of telephones | 2 cc click-on coupler            |
| <b>Coupler Acoustic Equivalent Volume</b> | 2 cm <sup>3</sup> / 6 cm <sup>3</sup> | 4.2 cm <sup>3</sup>                | 1.26 cm <sup>3</sup>                                   | 4.2 cm <sup>3</sup>                      | 1.26 cm <sup>3</sup>                       | 1.26 cm <sup>3</sup>   | 1.26 cm <sup>3</sup>   | 2 cm <sup>3</sup>                |
| <b>Microphone Included</b>                | No                                    | No                                 | Built-in   | Type 4192                                | Built-in                                   | Built-in   | Built-in   | No                               |
| <b>Prepolarized Microphone</b>            | No                                    | Yes, optional                      | No   | No                                       | No   | No   | Yes  | No                               |
| <b>Accommodates Microphone Size</b>       | 1/2" and 1"                           | 1/2"                               | 1/2" built-in  | 1/2"                                     | 1/2" built-in                              | 1/2" built-in  | 1/4" built-in  | 1/4", 1/2" and 1"                |
| <b>Preamplifier Included</b>              | No                                    | No                                 | Type 2669  | Type 2669                                | Type 2669                                  | Type 2695  | Built-in   | No                               |
| <b>Relevant Standard</b>                  | IEC 60318-5<br>ANSI S3.7              | IEC 60318-1                        | IEC 60318-4<br>ANSI S3.35<br>ITU-T Rec.<br>P.57 Type 2 | IEC 60318-1<br>ITU-T Rec.<br>P.57 Type 1 | IEC 60318-4<br>ITU-T Rec.<br>P.57 Type 3.2 | IEC 60318-4<br>ANSI S3.35<br>ITU-T Rec.<br>P.57 Type 3.2         | IEC 60318-4<br>ANSI S3.35<br>ITU-T Rec.<br>P.57 Type 3.2         | IEC 60318-5<br>ANSI S3.7         |
| <b>TEDS Enabled Preamplifier</b>          | N/A                                   | N/A                                | Yes  | Yes                                      | Yes  | Yes  | Yes  | N/A                              |
| <b>Test Application</b>                   | Earphones (supra aural)               | Earphones (circum and supra aural) | Insert earphones<br>Hearing aids                       | Earphones (circum and supra aural)       | Earphones<br>Telephones                    | Earphones<br>Telephones  | Earphones<br>Telephones  | Insert earphones<br>Hearing aids |
| <b>Pinna Type</b>                         | Simplified                            | Simplified                         | N/A  | Simplified                               | Simplified                                 | Simplified   | 4195-Q-A: N/A<br>4195-A-HL0:<br>Simplified                       | N/A                              |
| <b>Calibration Adaptor</b>                | -                                     | -                                  | DB-2012<br>DB-2015                                     | -  | DP-0939                                    | UC-5366  | DP-1079  | -                                |
| <b>Typical Sensitivity</b>                |                                       |                                    | 12.5 mV/Pa   | 12.5 mV/Pa                               | 12.5 mV/Pa                                 | 12.5 mV/Pa   | 11.2 mV/Pa   |                                  |


| Type No.                                  | 4128-C   | 4128-D   | 4227                                      | 4602-B                                    | 4930   | 4232                                   | 9640             | 2735                                 |
|---|--|--|---|---|--|--|------------------|--------------------------------------|
| <b>Description</b>                        | Head and torso simulator   | Head and torso simulator   | Mouth simulator                           | Telephone test head                       | Artificial mastoid                             | Anechoic test box                      | Turntable system | Power amplifier                      |
| <b>Coupler Acoustic Equivalent Volume</b> | 1.26 cm <sup>3</sup>   | 1.26 cm <sup>3</sup>   |   |   |  |  |                  |                                      |
| <b>Microphone Included</b>                | Built-in   | Built-in   | N/A                                       | N/A                                       | N/A  | N/A                                    | N/A              | N/A                                  |
| <b>Prepolarized Microphone</b>            | Yes, optional  | Yes, optional  |   |   |  |  |                  |                                      |
| <b>Accommodates Microphone Size</b>       | 1/2" built-in  | 1/2" built-in  | N/A                                       | N/A                                       | N/A  | 1/2" and 1"                            | N/A              | N/A                                  |
| <b>Preamplifier Included</b>              | Type 2669  | Type 2669  | N/A                                       | N/A                                       | N/A  | No                                     | N/A              | N/A                                  |
| <b>Relevant Standard</b>                  | ITU-T Rec. P.51, P.57 Type 3.3, and P.58<br>IEEE 269 and 661<br>ANSI S3.36 | ITU-T Rec. P.51, P.57, P.58 and P.64<br>IEEE 269 and 661<br>ANSI S3.36 | ITU-T Rec. P.51                           | ITU-T Rec. P.64                           | IEC 60318-6<br>ANSI S3.13 and S3.26<br>BS 4009 | -                                      | -                | -                                    |
| <b>TEDS Enabled Preamplifier</b>          | No   | No   | N/A                                       | N/A                                       | N/A  | N/A                                    | N/A              | N/A                                  |
| <b>Test Application</b>                   | All types of earphones and telephones                                      | All types of earphones and telephones                                  | Telephone transmitters, microphones, etc. | Telephone handsets                        | Bone vibrators                                 | Hearing aids microphones and receivers | Loudspeakers     | Electroacoustics and general purpose |
| <b>Pinna Type</b>                         | Anatomically shaped  | Anatomically shaped  | N/A                                       | Adapts to all simplified pinna simulators | N/A  | N/A                                    | N/A              | N/A                                  |
| <b>Calibration Adaptor</b>                | UA-1546<br>DP-0776   | UA-1546<br>DP-0776   | -   | -   | -  | -                                      | -                | -                                    |
| <b>Typical Sensitivity</b>                | 11.3 mV/Pa   | 11.3 mV/Pa   |   |   |  |  |                  |                                      |

## Typical System Configurations


The figures below show different system configurations used for typical electroacoustic applications.

Many typical electroacoustic measurements are available as PULSE™ multi-analyzer projects and form an integral part of the PULSE Audio Analyzer. If more specialized measurement tasks are required, this can be accomplished within PULSE. For highly specialized measurement tasks, Visual Basic® for Applications can be applied. For more information on the use of PULSE in electroacoustic applications, see the product data for PULSE Electroacoustics [BP 2085](#).


### Loudspeaker testing using measuring microphone

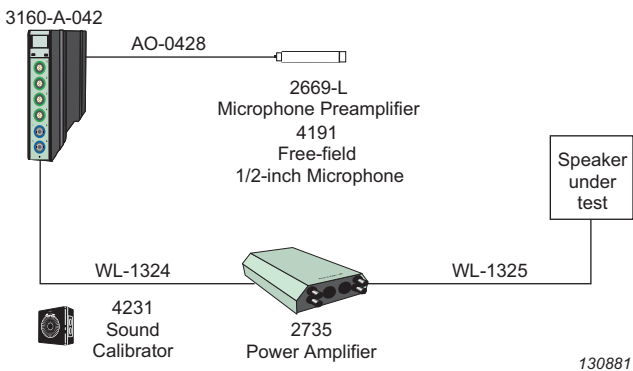


### Receiver testing using ear simulator

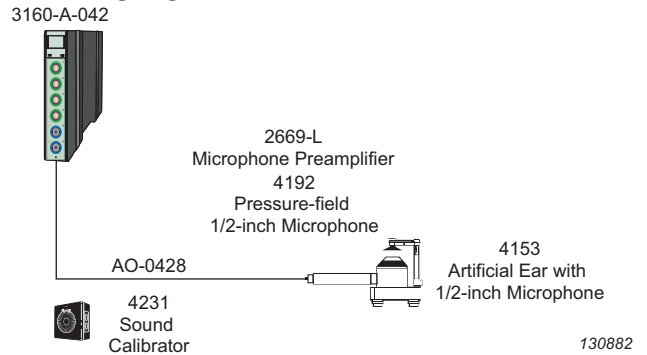


### Microphone testing using mouth simulator

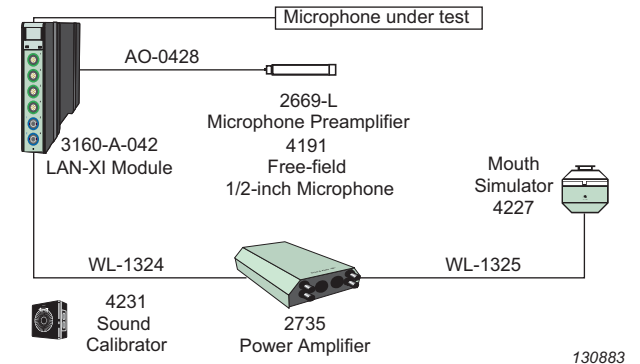


Telephone testing using test head

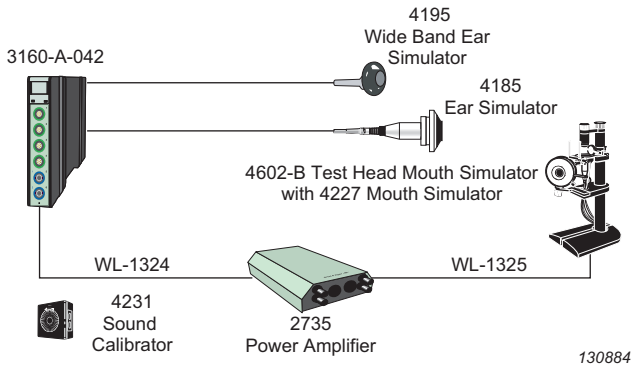


Headphone and headset testing using HATS

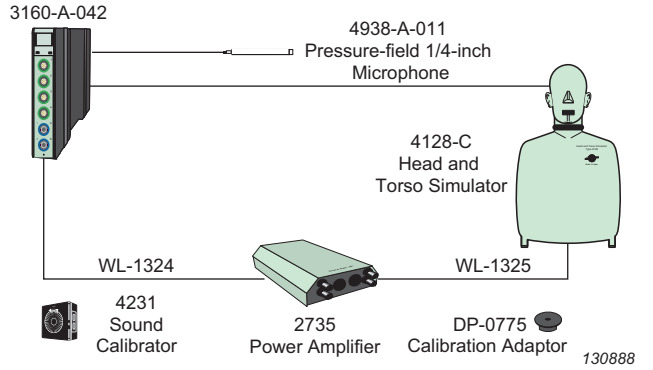


Telephone testing using head and torso simulator (HATS)

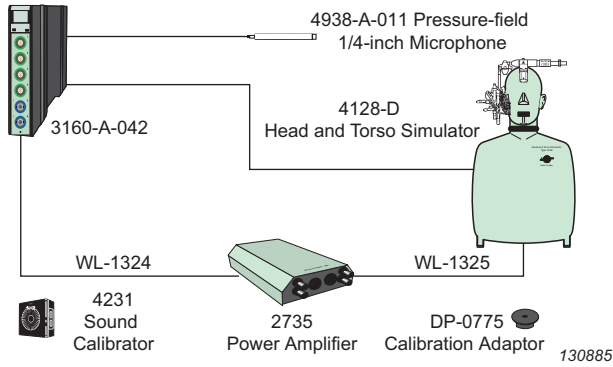


Example directivity measurement setup using turntable system

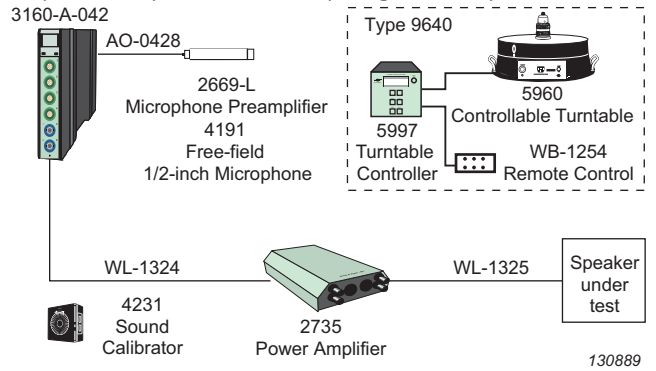

Hearing aid testing using ear simulator and anechoic test box

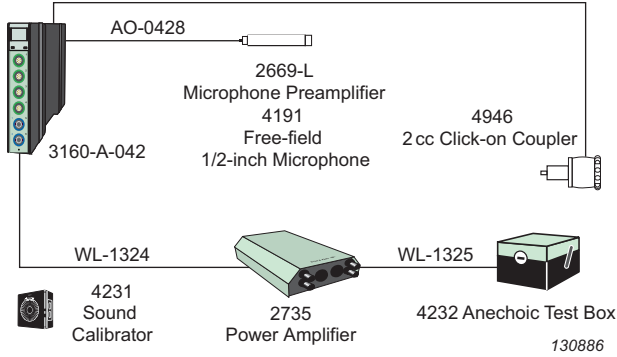

Audiometer testing using ear simulator and artificial mastoid

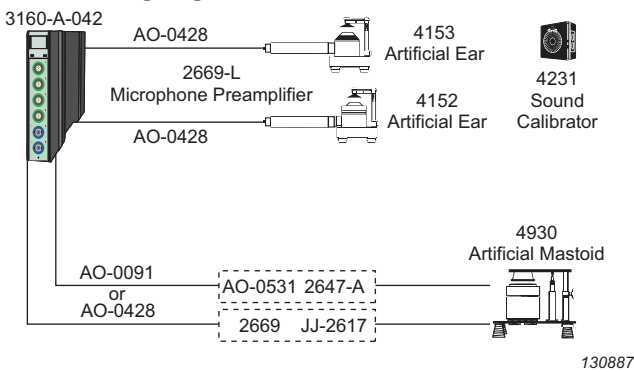

# COUPLERS

## Artificial Ears and Mastoids



| Type No.                                      |                | 4152  | 4153   |
|---|----------------|---|--|
| Max. Force Applied to Top of Acoustic Coupler | N (kgf)        | 10 (1)  | N/A  |
| Coupler Acoustic Equivalent Volume            |                | 2 cm <sup>3</sup> and 6 cm <sup>3</sup>   | 4.2 cm <sup>3</sup>  |
| Microphone Included                           |                | No  | No   |
| Prepolarized Microphone                       |                | No  | No*  |
| Accommodates Microphone Size                  |                | 1/2" and 1"   | 1/2"   |
| Preamplifier Included                         |                | No  | No   |
| Relevant Standard                             |                | IEC 60318-5<br>ANSI S3.7 (1995)   | IEC 60318-1  |
| Pinna Type                                    |                | Simplified  | Simplified   |
| Coupler Volumes                               | V <sub>1</sub> | 2 or 6 cm <sup>3</sup> = 1%   | 2.5 cm <sup>3</sup> = 1%   |
|   | V <sub>2</sub> | 1.8 cm <sup>3</sup> = 1%  | 1.8 cm <sup>3</sup> = 1%   |
|   | V <sub>3</sub> | 7.5 cm <sup>3</sup> = 1%  | 7.5 cm <sup>3</sup> = 1%   |
| Height  | mm (in)        | 104 (4.1)   |  |
| Max. Diameter                                 | mm (in)        | 123 (4.85)  |  |
| Accessories Included                          |                | <ul style="list-style-type: none"> <li>• 2 cm<sup>3</sup> Coupler DB-0138</li> <li>• 6 cm<sup>3</sup> Coupler DB-0913</li> <li>• Coupler Adaptor Ring DB-0111</li> <li>• Guard Ring Adaptor DB-1021</li> <li>• Adaptor for SLM DB-0962</li> </ul> | <ul style="list-style-type: none"> <li>• 1/2" Adaptor Ring DB-0742</li> <li>• Adaptor Plate for Headphones DB-0843</li> <li>• Transmitter Adaptor AQ-0015</li> <li>• Earcap YJ-0305</li> </ul> |
| Test Applications                             |                | For measurements on hearing aids, earphones and headphones  | For measurements on earphones, headphones and receivers  |
| Other Applications                            |                | For verification of audiometers using earphones   |  |

\* Type 4153-W-001 available with Prepolarized Pressure-field 1/2" Microphone Type 4947



|                                    |  |              |
|------------------------------------|--|--------------|
| Type No.                           | 4157   |              |
| Coupler Acoustic Equivalent Volume | 1.26 cm <sup>3</sup>   |              |
| Typical Sensitivity                | mV/Pa  | 12.5         |
| Resonant Frequency                 | kHz  | 13.5 ± 1.5   |
| Microphone Included                | Built-in   |              |
| Prepolarized Microphone            | -  |              |
| Accommodates Microphone Size       | 1/2" built-in  |              |
| Preamplifier Included              | Type 2669  |              |
| Relevant Standard                  | IEC 60318-4 (2010)<br>ANSI S3.35 (2004)<br>ITU-T Rec. P.57, Type 2   |              |
| Height                             | mm (in)  | 23 (0.91)    |
| Diameter                           | mm (in)  | 23.77 (0.94) |
| Included Accessories               | <ul style="list-style-type: none"> <li>• 1/2" Microphone Type 4192</li> <li>• Preamplifier Type 2669</li> <li>• External Ear Simulator DB-2012</li> <li>• Ear Mould Simulators DB-2015 and DP-0370</li> <li>• Tube Stud DP-0368</li> <li>• Ear Mould Holders DS-0540 and DS-0541</li> <li>• 1/4" Microphone Adaptor DP-0276</li> <li>• Retaining Collar DP-0286</li> <li>• Dust Protector DS-0535</li> <li>• Adaptor for ITE Hearing Aids DP-0530</li> </ul> |              |
| Test Applications                  | For measurements on hearing aids   |              |



|  |  |             |
|--|--|-------------|
| <b>Type No.</b>  | <b>4946</b>  |             |
| <b>Coupler Acoustic Equivalent Volume</b>              | 2 cm <sup>3</sup>  |             |
| <b>Supported Microphones and Preamplifiers</b>         | <ul style="list-style-type: none"> <li>• 1/2" Pressure-field Microphone Type 4192 (externally polarized)</li> <li>• 1" Pressure-field Microphone Type 4144 (externally polarized)</li> <li>• 1/2" Microphone Type 4947 (prepolarized)</li> <li>• 1/2" Preamplifier Type 2639</li> <li>• 1/2" Preamplifier Type 2669</li> <li>• 1/2" CCLD Preamplifier Type 2695</li> <li>• 1/2" CCLD Preamplifier Type 2671</li> </ul> |             |
| <b>Microphone Included</b>                             | No   |             |
| <b>Accommodates Microphone Size</b>                    | 1/4", 1/2" and 1"  |             |
| <b>Preamplifier Included</b>                           | No   |             |
| <b>Relevant Standard</b>                               | IEC 60318-5 (2006)*<br>ANSI S3.7 (1995)*   |             |
| <b>Height</b><br>(with ear mould, coupler and adaptor) | mm (in)  | 27.6 (1.09) |
| <b>Max. Diameter</b>                                   | mm (in)  | 28 (1.10)   |
| <b>Included Accessories</b>                            | <ul style="list-style-type: none"> <li>• 2 cc Coupler Basis UA-1615</li> <li>• 1/2" Microphone Adaptor UA-1616</li> <li>• 1/2" Preamplifier Adaptor for 1" Microphone UA-2041</li> <li>• Ear Plug Simulator with Tube Stud for BTE DB-3869</li> <li>• Ear Mould Simulator for Insert Earphones DB-3887</li> <li>• Ear Mould Simulator for ITES DB-3866</li> <li>• Tube Stud for ITES DB-3868</li> </ul>                |             |
| <b>Test Application</b>                                | For measurement on hearing aids with a rugged design for repetitive use in production environment  |             |

\* Using 1" Pressure-field Microphone Type 4144





|                                      |  |  |
|--------------------------------------|--|--|
| Type No.                             | 4930   |  |
| Frequency Range                      | Hz   | 50 to 10 k   |
| Charge Sensitivity to Acceleration*  |  | 2 pC/ms <sup>-2</sup> at 1.0 kHz   |
| Voltage Sensitivity to Acceleration* |  | -63 dB re 1 V/ms <sup>-2</sup><br>(0.7 mV/ms <sup>-2</sup> ) at 1.0 kHz  |
| Charge Sensitivity to Force          | pC/N   | 300  |
| Voltage Sensitivity to Force*        | mV   | 100  |
| Capacitance*                         | nF   | 3  |
| Adjustable Static Force              | N  | 2 to 8   |
| Calibration Surface Area             | mm <sup>2</sup>  | 1260   |
| Inertial Mass                        | kg (lb)  | 3.5 (7.7)  |
| Max. Height                          | mm (in)  | 165 (6.5)  |
| Width                                | mm (in)  | 205 (8.1)  |
| Depth                                | mm (in)  | 134 (5.3)  |
| Weight                               | kg (lb)  | 3.4 (9.5)  |
| Relevant Standard                    |  | IEC 60373 (1990)<br>ANSI S3.13 and S.3.26 (1987)<br>BS 4009  |
| Included Accessories                 |  | <ul style="list-style-type: none"> <li>• Spring Balance UA-0247</li> <li>• Level Indicator UA-0262</li> <li>• Slide Rule QH-0006, with case</li> </ul> |
| Test Application                     | For measurements on bone-conducting hearing aids by simulating the mechanical impedance of human mastoid |  |

\* Individually calibrated

**Note:** To calibrate Type 4930, you will need Impedance Head Type 8000, Mini Shaker Type 4810, Shaker Arm UA-0274 and Spring Arrangement UA-0263. When ordered at the same time, these components comprise Artificial Mastoid with Calibrator Type 3505. Type 3505 can also be used to take the same measurements on human mastoids and foreheads and to determine bone conduction threshold values.


# Ear and Mouth Simulators for Telephone Testing



| Type No.                           |         | 4185   | 4195   |
|------------------------------------|---------|--|--|
| Coupler Acoustic Equivalent Volume |         | 4.2 cm <sup>3</sup>  | 1.26 cm <sup>3</sup>   |
| Typical Sensitivity                | mV/Pa   | 12.5   | 12.5   |
| Frequency Range                    | Hz      | 100 to 4 k   | 100 to 8 k   |
| Microphone Included                |         | Type 4192  | Built-in   |
| Prepolarized Microphone            |         | -  | -  |
| Accommodates Microphone Size       |         | 1/2"   | 1/2" built-in  |
| Preamplifier Included              |         | Type 2669  | Type 2669  |
| Relevant Standard                  |         | IEC 60318-1<br>ITU-T Rec. P.57, Type 1   | IEC 60318-4 (2010)<br>ITU-T Rec. P.57<br>ITU-T Rec. P.57, Type 3.2   |
| Height                             | mm (in) | 103 (4.06)*  | 126 (5)  |
| Max. Diameter                      | mm (in) | 60 (2.6)*  | 60 (2.4)   |
| TEDS Enabled Preamplifier          |         | -  | -  |
| Pinna Type                         |         | Simplified   | Simplified   |
| Included Accessories               |         | <ul style="list-style-type: none"> <li>• 1/2" Condenser Microphone Type 4134</li> <li>• 1/2" Microphone Preamplifier Type 2669</li> <li>• Acoustic Coupler UA-1110†</li> <li>• Ring for Acoustic Coupler DB-1160</li> <li>• Adaptor Sleeve for Acoustic Coupler DB-1164</li> <li>• Black Collar for Acoustic Coupler YJ-0430</li> <li>• 5 × Soft Seal YJ-0431</li> <li>• Microphone Cable AO-0419</li> <li>• Accelerometer Cable AO-0122</li> <li>• BNC Input Adaptor JP-0145</li> <li>• LEMO to Brüel &amp; Kjær 7-pin Adaptor ZG-0350</li> </ul> | <ul style="list-style-type: none"> <li>• Low-leak Pinna Simulator UA-1304</li> <li>• High-leak Pinna Simulator UA-1448</li> <li>• 1/2" Microphone Preamplifier Type 2669</li> <li>• IEC 60318-4-compliant Coupler UA-1305</li> <li>• Soft Seal YJ-0892</li> <li>• LEMO to Brüel &amp; Kjær 7-pin Adaptor ZG-0350</li> <li>• Microphone Cable AO-0419</li> <li>• Calibration Adaptor DP-0939</li> </ul> |
| Test Application                   |         | For measurements on handset telephones including handsets with high impedance earpieces where sealed conditions are required   | For wideband measurements on handset telephones where realistic acoustical loads are needed  |

\* Coupler and preamplifier  
† With built-in miniature sound source

As phone technology rapidly advances, designs must be tested to ensure the quality of speech transmission. Brüel & Kjær's range of couplers are designed for realistic and comparable telephone receiver response measurements both on the production line and in the laboratory. The couplers can be used in test boxes, on the production line and in standardized test heads used in the laboratory. Perfect handset seals ensure high on-line repeatability and full measurement compatibility between production and R&D. All interfaces can be customized for specific telephone designs.





| Type No.                                  |         | 4195-Q and 4195-Q-HL0  | 4195-Q-A  | 4195-A-HL0  |
|---|---------|--|---|---|
| <b>Coupler Acoustic Equivalent Volume</b> |         | 1.26 cm <sup>3</sup>   | 1.26 cm <sup>3</sup>  | 1.26 cm <sup>3</sup>  |
| <b>Typical Sensitivity</b>                | mV/Pa   | 12.5   | 11.2  | 11.2  |
| <b>Frequency Range</b>                    | Hz      |  | 50 to 20 k  | 50 to 20 k  |
| <b>Microphone Included</b>                |         | Built-in   | Built-in Type 4959  | Built-in Type 4959  |
| <b>Prepolarized Microphone</b>            |         | Yes  | Yes   | Yes   |
| <b>Accommodates Microphone Size</b>       |         | 1/2" built-in  | 1/4" built-in   | 1/4" built-in   |
| <b>Preamplifier Included</b>              |         | Type 2695  | Built-in  | Built-in  |
| <b>Relevant Standard</b>                  |         | IEC 60318-4<br>ITU-T Rec. P.57<br>ANSI S3.35   | IEC 60318-4<br>ITU-T Rec. P.57<br>ANSI S3.35  | IEC 60318-4<br>ITU-T Rec. P.57<br>ANSI S3.35  |
| <b>Height</b>                             | mm (in) | 90 (3.54)  | –   | –   |
| <b>Max. Diameter</b>                      | mm (in) | 39 (1.54)  | –   | –   |
| <b>TEDS Enabled Preamplifier</b>          |         | Yes  | Yes   | Yes   |
| <b>Pinna Type</b>                         |         | Simplified   | No pinna  | Simplified, high-leak   |
| <b>Included Accessories</b>               |         | <ul style="list-style-type: none"> <li>• Pinna Simulator DB-3800 (Type 4195-Q only)</li> <li>• High-leak Pinna Simulator DB-3800-W-001 (Type 4195-Q-HL0 only)</li> <li>• 1/2" Microphone Preamplifier Type 2695</li> <li>• IEC 60318-4-compliant Coupler with Prepolarized Microphone UA-1567</li> <li>• Adaptor Ring for Calibration UC-5366</li> </ul> | <ul style="list-style-type: none"> <li>• Coupler with Microphone Type 4959</li> </ul> | <ul style="list-style-type: none"> <li>• Wideband simplified pinna simulator, high-leak version DB-4339</li> <li>• Standard adaptor ring UC-0231</li> </ul> |
| <b>Test Application</b>                   |         | For wideband production line measurements (QC) on handset telephones   |   |   |



| Type No.   |         | 4227   | 4227-A*   |
|--|---------|--|---|
| <b>Continuous Output Level</b><br>(measured 25 mm from lip ring )                        | dB SPL  | 200 Hz to 2 kHz: Min. 110<br>100 Hz to 12 kHz: Min. 100  | 200 Hz to 2 kHz: Min. 110<br>100 Hz to 12 kHz: Min. 100   |
| <b>Distortion</b><br>(harmonic components up to 8 kHz at 94 dB SPL, 25 mm from lip ring) |         | 200 Hz to 250 Hz: <2%<br>>250 Hz: <1%  | 200 Hz to 250 Hz: <2%<br>>250 Hz: <1%   |
| <b>Loudspeaker Max. Average Power</b> †  |         | 10 W at 20 °C (68 °F)  | 0.8 V <sub>rms</sub>  |
| <b>Loudspeaker Max. Pulsed Power</b>   |         | 50 W for 2 seconds   | 1.5 V <sub>rms</sub> for 2 seconds  |
| <b>Loudspeaker Impedance</b>   | Ω       | 4  | –   |
| <b>Relevant Standard</b>   |         | ITU-T P.51, IEEE 269 and IEEE 661  | ITU-T P.51, IEEE 269 and IEEE 661   |
| <b>Diameter</b>  | mm (in) | 104 (4.1)  | 104 (4.1)   |
| <b>Height</b>  | mm (in) | 104 (4.1) to top of lip ring   | 104 (4.1) to top of lip ring  |
| <b>Included Accessories</b>  |         | <ul style="list-style-type: none"> <li>• Calibration Jig UA-0901</li> <li>• 2 × Lip Ring SO-0005</li> <li>• 1/4" Plastic Microphone Dummy DA-0150</li> </ul> | <ul style="list-style-type: none"> <li>• Calibration Jig UA-0901</li> <li>• 2 × Lip Ring SO-0005</li> <li>• 1/4" Plastic Microphone Dummy DA-0150</li> <li>• Power Supply ZG-0426, 100 to 240 V AC</li> </ul> |
| <b>Test Application</b>  |         | For measurements on handset telephones with a realistic simulation of the human voice field  |   |
| <b>Other Applications</b>  |         | Accurate reference source for near-field testing of handsets and microphones   |   |

\* Type 4227 and 4227-A are similar, but Type 4227-A has an integrated class D amplifier

† With built-in overload protection circuit

# Head and Torso Simulators and Telephone Test Heads



4128-C



4128-D

|  |                        |  |  |
|--|------------------------|--|--|
| <b>Type No.</b>  |                        |  |  |
| <b>Coupler Acoustic Equivalent Volume</b>  |                        | 1.26 cm <sup>3</sup>   |  |
| <b>Relevant Standard</b>   |                        | ITU-T Rec. P.51, P.57 and P.58<br>IEEE 269 and 661<br>ANSI S3.36   | ITU-T Rec. P.51, P.57, P.58 and P.64<br>IEEE 269 and 661<br>ANSI S3.36 |
| <b>Listener Frequency Response</b>   |                        | Conforms to ITU-T Rec. P.58 for measurements on telecommunications devices and to IEC 60318-7 and ANSI S3.36-1985 for measurements on air conducting hearing aids                    |  |
| <b>Ear Simulator</b>   |                        | Right Ear Simulator Type 4158-C included<br>IEC 60318-4/ITU-T Rec. P.57 Type 3.3-based calibrated ear simulator complying with ITU-T Rec. P.57, IEC 60318-4 and ANSI S3.25 standards |  |
| <b>Mouth Simulator</b>   |                        | Built-in   |  |
| <b>Typical Sensitivity</b>   | <b>Ear Simulator</b>   | mV/Pa  | 11.3 (-38 dB re 1 V/Pa) at 250 Hz                                      |
|  | <b>Mouth Simulator</b> | dB SPL   | 80 (2 V/500 mm) at 1 kHz   |
| <b>Mouth Simulator Distortion</b><br>(harmonic components up to 12 kHz) at 94 dB SPL |                        | 200 Hz to 250 Hz: <2%<br>>250 Hz: <1%  |  |
| <b>Pinna Simulators</b>  |                        | Anatomically shaped and calibrated<br>Dimensions similar to those specified in ITU-T Rec. P.58, IEC 60318-7 and ANSI S3.36   |  |
| <b>Sound Pressure Distribution of Mouth Simulator</b>                                |                        | Conforms to ITU-T Rec. P.58  |  |
| <b>Mouth Opening</b>   | mm (in)                | W × H: 30 × 11 (1.18 × 0.43)   |  |
| <b>Equivalent Lip Plane Position, CL</b>   |                        | 6 mm in front of the sound radiation opening   |  |
| <b>Mouth Reference Point, MRP</b>  |                        | 25 mm in front of mouth CL   |  |
| <b>Continuous Output Level at MRP</b>  | dB SPL                 | 200 Hz to 2 kHz: Min. 110<br>100 Hz to 12 kHz: Min. 100  |  |
| <b>Max. Average Input Power of Mouth Simulator</b>                                   | W                      | 10 max. continuous average power at 20 °C (68 °F)  |  |
| <b>Max. Pulsed Input Power of Mouth Simulator</b>                                    | W                      | 50 for 2 seconds   |  |
| <b>Loudspeaker Impedance</b>   | Ω                      | 4  |  |
| <b>Handset Thickness*</b>  | mm (in)                | -  | Min: ≥0 (0)<br>Max: 44 (1.73) <sup>†</sup>                             |
| <b>Handset Width*</b>  | mm (in)                | -  | Min: 26 (1.02)<br>Max: 66 (2.6)  |
| <b>Microphone Included</b>   |                        | Built-in   |  |
| <b>Prepolarized Microphone</b>   |                        | Yes, optional  |  |
| <b>Accommodates Microphone Size</b>  |                        | 1/2" (built-in)  |  |
| <b>Preamplifier Included</b>   |                        | Type 2669  |  |
| <b>TEDS Enabled Preamplifier</b>   |                        | No   |  |
| <b>Height</b>  | <b>Head and Torso</b>  | mm (in)  | 695 (27.4)   |
|  | <b>Torso Only</b>      |  | 460 (18)   |
| <b>Head Angles</b>   |                        | Vertical or tilted 17° forwards  |  |

Table continues on next page



4128-C




4128-D

|                      |                    |         |  |  |
|----------------------|--------------------|---------|--|--|
| Type No.             |                    |         | 4128-C   | 4128-D   |
| Weight               | HATS               | kg (lb) | 9 (19.8)   |  |
|                      | Handset Positioner |         | –  | 1.4 (3.09) incl. cradle, excl. handset   |
|                      | Alignment Jig      |         | –  | 2.4 (5.29) excl. cradle  |
| Included Accessories |                    |         | <ul style="list-style-type: none"> <li>• Right Pinna – soft (Shore-OO 35) DZ-9769</li> <li>• Left Pinna – soft (Shore-OO 35) DZ-9770</li> <li>• Ear Mould Simulator – short DB-2902</li> <li>• Ear Mould Simulator – long UC-0199</li> <li>• Adaptor for Calibration UA-1546</li> <li>• Ear Mounting Tool QA-0167</li> <li>• Preamplifier Mounting Tool QA-0223</li> <li>• Support Feet UA-1043</li> <li>• Ref. Microphone Holder UA-2127</li> <li>• Adaptor for Tripod UC-5290</li> </ul> | <ul style="list-style-type: none"> <li>• Handset Positioner Type 4606</li> <li>• Right Pinna – soft (Shore-OO 35) DZ-9769</li> <li>• Left Pinna – soft (Shore-OO 35) DZ-9770</li> <li>• Ear Mould Simulator – short DB-2902</li> <li>• Ear Mould Simulator – long UC-0199</li> <li>• Adaptor for Calibration UA-1546</li> <li>• Ear Mounting Tool QA-0167</li> <li>• Preamplifier Mounting Tool QA-0223</li> <li>• Support Feet UA-1043</li> <li>• Ref. Microphone Holder UA-2127</li> <li>• Adaptor for Tripod UC-5290</li> </ul> |
| Test Application     |                    |         | For objective in situ measurements on headsets, hearing aids, earphones and telephones with realistic simulation of the human voice field as well as the human pinna   | For objective in situ measurements on telephone handsets with realistic simulations of a human holding a handset telephone and of the human voice field as well as the human pinna   |

\* Using the included Handset Positioner Type 4606. Type 4606 can be ordered as optional with Type 4128-C  
 † Max: 90 mm with UA-1587 fork for wide handsets

With the continual expansion of the world's cellular telephone network, conversations can take place almost anywhere – in quiet offices or in a noisy outdoor environment. Therefore, the acoustic perception of handsets is becoming increasingly important as users demand high voice quality in all situations. Whether you are working with mobile phones or corded handset/headset telephones, high voice quality using advanced acoustic and electronic signal processing combined with superior design is essential. When it comes to the actual testing of telephones two standardized test configurations are defined. One is based on Test Head equipped with a stand-alone mouth simulator and ear simulator positioned on the test head. The other is based on HATS (Head and Torso Simulator) with an integrated mouth simulator and one or two integrated ear simulators.

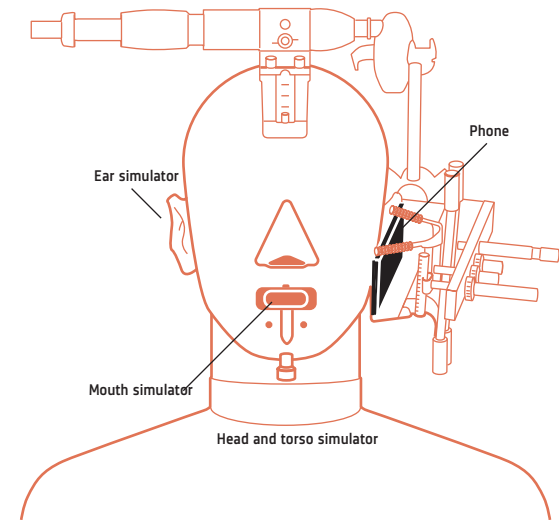



|   |  |   |
|---|--|---|
| <b>Type No.</b>   | <b>4602-B</b>  |   |
| <b>Speaking Positions</b>   | LRGP position (ITU-T Rec. P.76)<br>HATS position (ITU-T P.58)<br>REF position (OREM A)<br>AEN position (ITU-T Rec. P.76)   |   |
| <b>Max. Handset Width</b>   | mm (in)  | 65 (2.56)   |
| <b>Max. Handset Length</b><br>(from the centre of the earcap to the top of the handset) | mm (in)  | 47 (1.85) without the stop screw<br>59 (2.32) without the rear alignment rods |
| <b>Relevant Standard</b>  | ITU-T Rec. P.64  |   |
| <b>Pinna Type</b>   | Adapts to all simplified pinna simulators  |   |
| <b>Ear Simulators</b>   | Accommodates Ear Simulators Types 4185 and 4195  |   |
| <b>Height</b>   | mm (in)  | 430 – 468 (16.9 – 18.4)   |
| <b>Width</b>  | mm (in)  | 170 (6.7)   |
| <b>Depth</b>  | mm (in)  | 260 (10.2)  |
| <b>Weight</b>   | kg (lb)  | 5.4 (11.9)<br>7.4 (16.3) with Mouth Simulator                                 |
| <b>Included Accessories</b>   | <ul style="list-style-type: none"> <li>• Main column with upper and lower main plates and holder arm</li> <li>• 2 × Handset Alignment Rods UA-1210</li> <li>• 8 × Handset Alignment Rods UA-1400 (two sets)</li> <li>• Rods with Offset Adjustment</li> <li>• 40 mm Coupler Hole Ring DB-3339</li> <li>• 50 mm Coupler Hole Ring DB-3340</li> <li>• Positioning Jig: LRGP, HATS, AEN and REF</li> <li>• Mounting Bushing for Mouth Simulator DS-0884</li> <li>• Handset Gauge UA-1206</li> <li>• Handset Gauge for Non-symmetrical Handsets UA-1401</li> </ul> |   |
| <b>Test Application</b>   | For measurements on hearing aids and microphones   |   |

# Acoustic Test Accessories



|  |                    |  |  |
|--|--------------------|--|--|
| <b>Type No.</b>  |                    | <b>4232*</b>   |  |
| <b>Dynamic Range</b>                                     |                    | From below 35 dB to above 110 dB SPL (re 20 $\mu$ Pa)  |  |
| <b>Uniformity of Sound Field</b>                         |                    | The measuring area is equivalent to the area occupied by the blue foam. The free-field sound level within the measuring area is equal to the regulated SPL within: $\pm 1$ dB from 20 Hz to 10 kHz   |  |
| <b>Insulation against Airborne Noise</b>                 | Hz                 | >40 dB: 20 to 1500<br>45 to 55 dB: >1500   |  |
| <b>Sensitivity (for 1 W input)</b>                       | dB SPL             | 110 at the test point<br>The test point is defined as the centre of the measuring area   |  |
| <b>Distortion<sup>†</sup> (125 Hz to 8 kHz)</b>          | <b>100 dB SPL</b>  | <0.5% 2nd harmonic<br><0.3% 3rd harmonic   |  |
|  | <b>70 dB SPL</b>   | <0.1% 2nd harmonic<br><0.06% 3rd harmonic  |  |
| <b>Frequency Range (without electrical equalization)</b> | Hz                 | 100 to 8 k ( $\pm 2$ dB)<br>35 to 10 k ( $\pm 3$ dB)<br>6 dB/octave attenuation slope below 35 Hz<br>24 dB/octave attenuation slope above 10 kHz   |  |
| <b>Excitation Levels</b>                                 | <b>Upper Limit</b> | dB SPL   | Maximum 110<br>Determined by ambient noise level and noise rejection |
|  | <b>Lower Limit</b> |  |  |
| <b>Free-field Properties of Sound Field</b>              |                    | Approximates free-field conditions above 500 Hz.<br>Sound radiation is in the horizontal plane   |  |
| <b>Loudspeaker Maximum Continuous Input Power</b>        | W                  | 4.5  |  |
| <b>Loudspeaker Maximum Peak Input Power</b>              | W                  | 40   |  |
| <b>Loudspeaker Nominal Impedance:</b>                    | $\Omega$           | 8 (maximum 25 $\Omega$ )   |  |
| <b>Telecoil Resistance</b>                               | $\Omega$           | 1  |  |
| <b>Telecoil Inductance</b>                               | $\mu$ H            | 9  |  |
| <b>Accommodates Microphone Size</b>                      |                    | 1/2" and 1"  |  |
| <b>Preamplifier Included</b>                             |                    | No   |  |
| <b>Height</b>  | mm (in)            | 260 (10.2)   |  |
| <b>Width</b>   | mm (in)            | 365 (14.4)   |  |
| <b>Depth</b>   | mm (in)            | 400 (15.7)   |  |
| <b>Weight</b>  | kg (lb)            | 22 (48.5)  |  |
| <b>Dimensions of Measurement Chamber</b>                 | mm (in)            | 60 $\times$ 165 $\times$ 200 (2.4 $\times$ 6.4 $\times$ 7.8)   |  |
| <b>Included Accessories</b>                              |                    | <ul style="list-style-type: none"> <li>• 2 <math>\times</math> Clip for holding IEC 711 or 2 cm<sup>3</sup> Coupler UA-1375</li> <li>• Clip for holding reference microphone UA-1376</li> <li>• Protection Bracket for external microphone preamplifier UA-1370</li> </ul> |  |
| <b>Test Application</b>                                  |                    | For measurements on hearing aids and microphones   |  |

\* All values are typical at 25  $^{\circ}$ C (77  $^{\circ}$ F), unless measurement uncertainty or tolerance field is specified. All uncertainty values are specified at  $2\sigma$  (that is, expanded uncertainty using a coverage factor of 2)

<sup>†</sup> Of the built-in sound source (high-quality loudspeaker)





Type No.

9640

|  |                  |   |
|--|------------------|---|
| <b>Turntable Load</b>                        | kg (lb)          | <b>Turntable plate lined up perfectly in horizontal plane:</b><br>Max. 100 (220) on centre<br>30 (66) on periphery<br><b>Turntable hung upside down:</b><br>Same loads apply                        |
| <b>Thread of Mounting Holes on Turntable</b> |                  | 10–32 UNF and M5  |
| <b>Turntable Resolution</b>                  |                  | 1°  |
| <b>Turntable Speed of Rotation</b>           | s per revolution | <b>Cont. Mode:</b> 22.7 to 720<br><b>Turn_abs and Turn_rel Modes:</b> 10 (max.)   |
| <b>Controller Commands</b>                   |                  | <b>Set 0 Deg:</b> Sets the reference angle<br><b>Acc.:</b> Sets the acceleration<br><b>Max_360 On/Off:</b> Turns max. 360° on or off ('On' prevents cable wrapping)                                 |
| <b>IEEE Interface*</b>                       |                  | Provides remote control of all front-panel functions.<br>Conforms with IEEE 488.1 and compatible with IEC 625–1   |
| <b>Turntable Cable Length</b>                | m (ft)           | 15 (48.5)   |
| <b>Turntable Plate Diameter</b>              | mm (in)          | 354 (13.9)  |
| <b>Turntable Weight</b>                      | kg (lb)          | 12 (26)   |
| <b>Included Accessories</b>                  |                  | <ul style="list-style-type: none"> <li>• Controllable Turntable Type 5960</li> <li>• Turntable Controller Type 5997</li> <li>• Remote Control WB-1254</li> <li>• Turntable Cable AO-0422</li> </ul> |
| <b>Test Application</b>                      |                  | For accurate positioning during directivity measurements  |

\* For remote control



| Type No.  |               | 2735   |
|---|---------------|--|
| Voltage Gain @ 1 kHz                                      | dB            | 0 ( $\pm 0.2$ dB) or 20 ( $\pm 0.2$ dB)<br>User selectable |
| Maximum Input Voltage                                     | $V_{pp}$      | 0 dB gain: 20<br>20 dB gain: 3.8                           |
| Maximum Output Power                                      | W             | 2 × 45 at 4 $\Omega$ , 5 Hz to 25 kHz                      |
| Continuous Output Power<br>(at 4 $\Omega$ 5 Hz to 25 kHz) | W             | at 20 °C: 2 × 35<br>at 50 °C: 2 × 10                       |
| Load  | $\Omega$ , nF | $\geq 3$ , $\leq 470$                                      |
| Frequency Response from<br>20 Hz – 20 kHz (typical)       | dB            | $\pm 0.5$ at 1 W, 4 $\Omega$                               |
| THD + Noise at 1 kHz, 1 W, 4 $\Omega$ (typical)           | %             | 1  |
| Common Mode Rejection (typical)                           | dB            | 80, up to 10 kHz   |
| Input Impedance   | k $\Omega$    | >20  |
| Output Impedance (typical)                                | m $\Omega$    | 0 dB gain: 75<br>20 dB gain: 25                            |
| Dynamic Range<br>Max. Output (rms)/Noise (typical)        | dB            | 110  |
| Channel Separation  | dB            | -80 up to 10 kHz   |
| Input Connectors  |               | 2 × BNC, isolated from chassis                             |
| Output Connectors   |               | 2 × Neutrik® 4-pin Speakon® sockets                        |
| Noise at Output (A-weighting)                             | $\mu V$       | 40   |
| Typical Acoustical Noise (fan)                            | dB(A)         | 28 at 1 m  |
| Dimensions  | cm (in)       | 24.3 × 13 × 6 (9.5 × 5.1 × 2.4)                            |
| Weight  | kg (lb)       | 0.65 (1.43)  |
| Test Application  |               | For driving sound sources                                  |

# SELECTING THE RIGHT ACCELEROMETER

Brüel & Kjær offers a broad spectrum of solutions that respond to varying needs and applications. This adaptability is evident in the range of transducers designed for specific environments, industries, tasks and conditions, as well as general purpose instruments that provide a wide operational range.

Selecting the best transducer for a given measurement task can be understandably overwhelming. Our interactive transducer selection guide on [www.bksv.com](http://www.bksv.com) can be a big help to quickly narrow your choices. Alternatively, see below for in-depth guides and tools so that you can select the right accelerometer to fit your needs.

Start by selecting the right accelerometer technology, then you can select the right accelerometer type. From there, you can focus on the measurement parameters (frequency range, dynamic range, etc).

## Technologies

Accelerometers use a spring-mass system to generate a force proportional to the vibration. Brüel & Kjær offers three types of accelerometers:

- Piezoelectric charge accelerometers
- Piezoelectric CCLD/DeltaTron/IEPE accelerometers
- Piezoresistive accelerometers

## Piezoelectric Charge Accelerometers

The force is applied to a piezoelectric (PE) element that produces a charge on its terminals proportional to the acceleration.

PE charge accelerometers are self-generating and, therefore, do not require any external power sources. They are capable of operation at high temperatures, but are constrained by high output impedance requiring low-noise cables and charge amplifiers to condition the signal.

## Piezoelectric CCLD Accelerometers

CCLD accelerometers are PE charge accelerometers with integral preamplifiers that have output signals in the form of low impedance voltage output.

Most Brüel & Kjær PE CCLD accelerometers are hermetically sealed to protect against environmental contamination, have low susceptibility to radio frequency electromagnetic radiation and low impedance output due to the built-in amplifier. This allows the use of inexpensive coaxial cables.

## Piezoresistive Accelerometers

Piezoresistive accelerometers are based on MEMS technology. The change of electrical resistance in proportion to applied mechanical stress on the springs retaining the seismic mass generates the output. The accelerometer includes integral mechanical stops and offers outstanding ruggedness, while still maintaining an excellent signal-to-noise ratio after the built-in bridge amplifier.

This type of accelerometer, with a frequency response extending down to DC or constant acceleration, is ideal for measuring motion, low-frequency vibration and long duration low-level shock.

## Compare Types

The following table compares the performance of each technology, specification by specification.

For an overview of key specifications for all of our standard accelerometers, see the comparison tables starting on [page 155](#).

|                                    | Piezoelectric (PE) Charge | PE CCLD          | Piezoresistive (PR) |
|------------------------------------|---------------------------|------------------|---------------------|
| Weight (relative)                  | Very low                  | Very Low         | Low                 |
| Miniature Design Capability        | Yes                       | Yes              | No                  |
| Useful Frequency Range Capability  | Very high                 | Very high        | Low                 |
| Sensitivity to Vibration           | High                      | High             | Low                 |
| Suitability for High Temperature   | Yes                       | No               | No                  |
| DC Response                        | No                        | No               | Yes                 |
| TEDS                               | No                        | Yes              | No                  |
| Sensitivity to Environment         | Low                       | Very low         | Low                 |
| Flat Phase Response at HF          | Yes                       | Yes              | No                  |
| Suitability for Shock Measurements | Medium                    | Medium           | Low                 |
| Long Pulse (crash testing)         | No                        | No               | Yes                 |
| High g Survivability, ruggedness   | Medium                    | Medium           | Medium              |
| Self-generating                    | Yes                       | No               | No                  |
| Long Cables (low impedance output) | No                        | Yes              | Yes                 |
| Cryogenic Temperature              | Yes                       | No               | No                  |
| Synonym                            | Charge                    | DeltaTron®, IEPE | Bridge              |

## Measurement Parameters

Generally speaking, the most important parameters to consider are frequency range and dynamic range.

### The Lower Limiting Frequency Range

This is normally the frequency where the response is 10% lower than the response at 159.2 Hz. For PE charge accelerometers, it is determined by the preamplifier used. For piezoelectric CCLD and piezoresistive types, the lower limiting frequency can be specified precisely because the preamplifier is built-in.

### The Upper Limiting Frequency Range

This is the frequency where the response has changed 10% compared to the response at 159.2 Hz. It is normally 1/3 of the mounted resonance frequency for undamped mass-spring systems like those in the PE transducers. Preamplifiers and damping of piezoresistive transducers can give many different responses.


With Brüel & Kjær's PULSE data acquisition systems, it is possible to use REq-X to extend the usable frequency range, mainly the upper limiting frequency range.

### Residual Noise Level

This is determined by noise generated by the sensing element and the preamplifier. In most cases, this is largely determined by the electronic noise. For low-level vibration, low residual noise levels are more important than high sensitivity because the high noise floor of the sensor will mask the low-level vibration.

### Maximum Range/Full Scale

This is determined by the maximum voltage swing possible if a preamplifier is included and the physical maximum stress level that can be sustained by the transducer structure without large distortion or destruction. In the graph below, we use Piezoelectric Charge Accelerometer Type 4393 as an example to explain this.

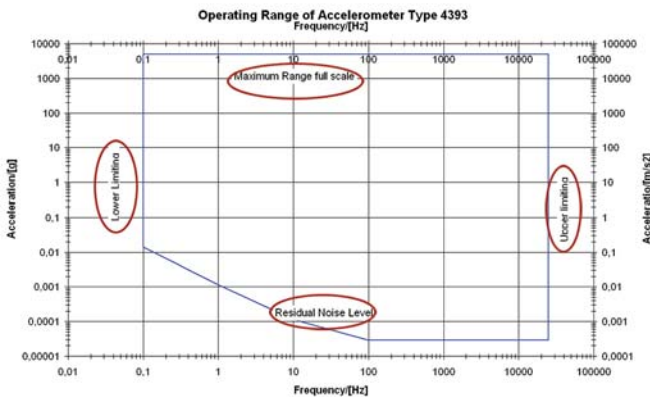

Note: Noise RMS level in 1 Hz bandwidth


It is always important to select an accelerometer that has a broader measuring range than required.

## The Effects of Temperature

### What happens at high temperatures?

Piezoelectric accelerometers are capable of vibration measurements over a wide temperature range. However, due to the properties of piezoelectric materials, variations of both voltage and charge sensitivities, as well as impedance, will occur when the accelerometer is operated at temperatures other than the reference.

As an example, the figure below shows the variation in capacitance, charge sensitivity and voltage sensitivity of piezoelectric material PZ23, which is the material used in many Brüel & Kjær accelerometers.

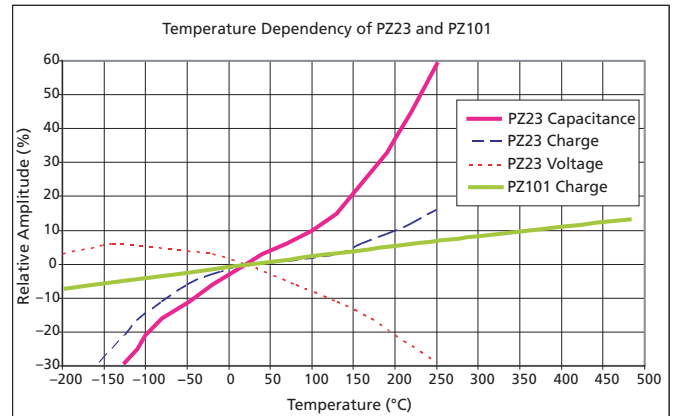


When using a piezoelectric accelerometer at high temperatures, its actual sensitivity, taking into account the change in sensitivity due to the increased operating temperature, can be determined using the "Temperature Coefficient of Sensitivity", which is available on every calibration chart.

The time required for the sensitivity to return to the one stated on the calibration chart is not easy to determine, but it will partly depend on the temperature to which the accelerometer was taken. In general, a period of 24 hours is required for an accelerometer to return to the calibrated sensitivity when it is immediately returned to room temperature from a temperature close to its maximum operating temperature.

Each accelerometer has a specified maximum operating temperature above which the piezoelectric element will begin to depolarize and cause a permanent change in sensitivity. This is 250 °C for charge accelerometers with PZ23 piezoelectric material.

It is possible to thermally isolate the base of a general purpose accelerometer from the vibrating surface using a screen made of a metal with high thermal conductivity.

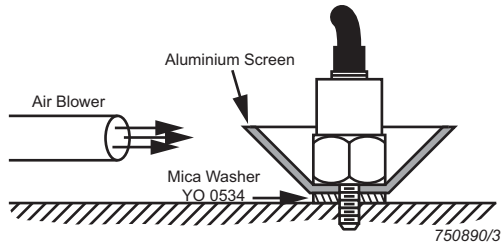


Such a screen enables measurements with charge accelerometers to be made on surfaces with a temperature up to 350 °C. If, at the same time, a stream of cooling air is directed at the accelerometer,

it is possible to measure on surfaces up to 450 °C. However, remember that the stiffness at the mounting point of the accelerometer may be altered by such a fixture, which in turn will lower the resonance frequency of the accelerometer.

For high-temperature measurements, Industrial Accelerometer Type 8347-C can be used up to 482 °C on its own.

### What is the lowest temperature?

The lower temperature limit for most Brüel & Kjær charge accelerometers is specified as -74 °C. While specifications have not been defined at temperatures below this, it is still possible to use general purpose accelerometers at even lower temperatures. For example, vibration measurements on structures have been made at the temperature of liquid nitrogen (-196 °C).

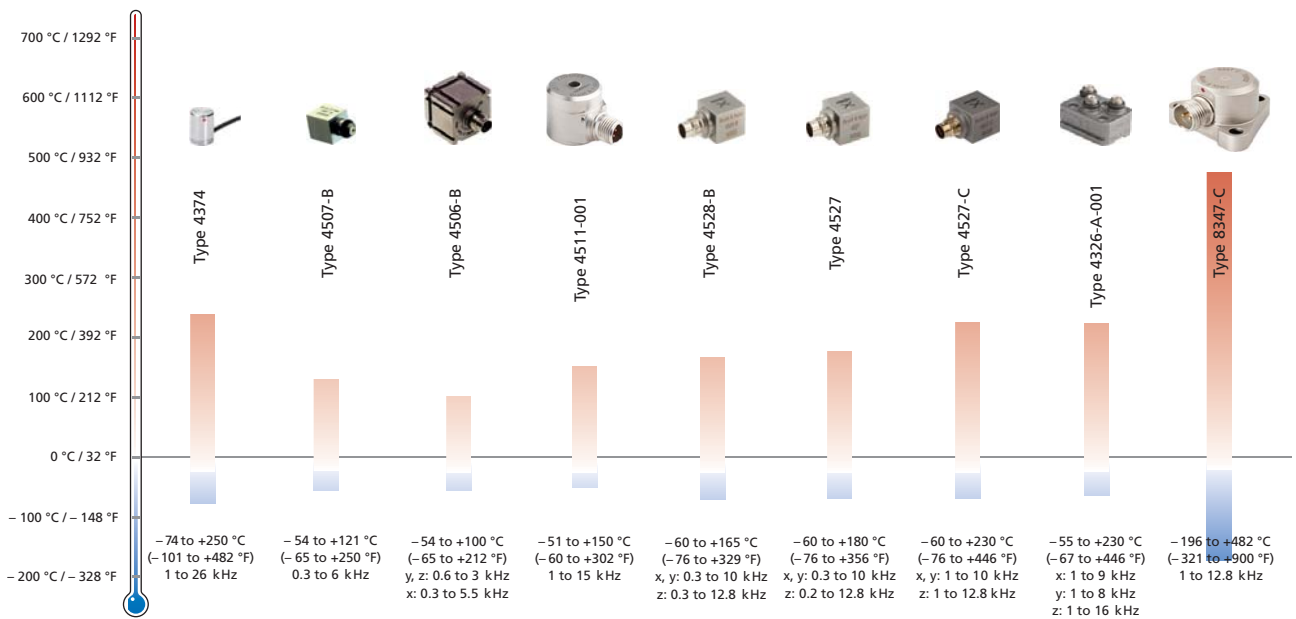

# ACCELEROMETERS

## Definitions of Given Accelerometer Specifications

### Sensitivity

- At 159.2 Hz
  - Units:  $\mu\text{C}/\text{ms}^{-2}$  ( $\mu\text{C}/\text{g}$ ) or  $\text{mV}/\text{ms}^{-2}$  ( $\text{mV}/\text{g}$ )
- The output of the accelerometer at 159.2 Hz ( $\omega = 1000 \text{ s}^{-1}$ ) with  $20 \text{ ms}^{-2}$  RMS acceleration at room temperature. For CCLD accelerometers the supply current is 4 mA.

Uni-Gain types have a measured sensitivity within  $\pm 2\%$  of a practical nominal value. Variable gain (V types) is within  $\pm 15\%$ . Uni-Gain and V type accelerometers have the same specifications and long-term stability. V types just have a relaxed sensitivity tolerance.

### Frequency Range

- $\pm 10\%$
  - Unit: Hz
- The range within which the sensitivity does not deviate more than 10% from the value at 159.2 Hz. The lower usable frequency range is determined by the lower limiting frequency of the amplifier used or the frequency at which the temperature, cable and other noise sources make usage impractical (for charge types). The upper usable frequency range is normally determined by the mounted resonance frequency and in a few cases the upper frequency cut-off of the amplifier or other structural resonances.

### Mounted Resonance Frequency

- Unit: kHz
- The resonance frequency of an accelerometer being mounted on a 180 gram steel block. For damped accelerometers no mounted resonance is given.

### Operating Temperature Range

- Unit: °C and °F
- The temperature range within which the accelerometer can be used continuously.

### Measuring Range ( $\pm$ peak)

- Unit: g
- The peak vibration range the accelerometer can measure with less than 1% distortion. At slightly higher amplitudes clipping might occur.

### Maximum Non-destructive Shock ( $\pm$ peak)

- Unit: g
- The peak shock the accelerometer can withstand repeatedly without being damaged. The shock duration shall be longer than 10 times the reciprocal mounted resonance frequency.

## Uniaxial Piezoelectric Charge Accelerometers

A charge-type piezoelectric accelerometer is a robust unit designed specifically for high-temperature vibration measurement on structures and objects. Its unique sensor design allows high dynamic range, long-term stability and ruggedness in the same package. For direct interchangeability and easy system calibration,

most Brüel & Kjær piezoelectric accelerometers are Uni-Gain types.

For accelerometer dimensions go to [page 147](#).



| Type No.                                    |  | 4374            | 4517-C         | 4517-C-003     | 4517-C-001    | 4385-C          | 4375*          |
|---|--|-----------------|----------------|----------------|---------------|-----------------|----------------|
| Weight                                      | gram<br>(oz)   | 0.75<br>(0.026) | 0.6<br>(0.021) | 0.85<br>(0.03) | 1<br>(0.035)  | 1.9<br>(0.067)  | 2.4<br>(0.085) |
| Charge Sensitivity at 159.2 Hz              | $\mu\text{C}/\text{ms}^{-2}$<br>( $\mu\text{C}/\text{g}$ ) | 0.15<br>(1.5)   | 0.18<br>(1.8)  | 0.18<br>(1.8)  | 0.18<br>(1.8) | 0.005<br>(0.05) | 0.316<br>(3.1) |
| Frequency Range ( $\pm 10\%$ ) <sup>†</sup> | Hz   | 1 to 26000      | 1 to 10000     | 1 to 9000      | 1 to 20000    | 1 to 50000      | 0.1 to 16500   |
| Mounted Resonance Frequency                 | kHz  | 85              | 80             | >30            | 75            | 150000          | 55             |
| Operating Temperature Range                 | °C   | -74 to +250     | -51 to +177    | -51 to +177    | -51 to +177   | -74 to +180     | -74 to +250    |
|   | °F   | -101 to +482    | -60 to +350    | -60 to +350    | -60 to +350   | -101 to +356    | -101 to +482   |
| Measuring Range (peak)                      | g  | 5000            | 1000           | 1000           | 1000          | 12000           | 5000           |
| Maximum Non-destructive Shock ( $\pm$ peak) | g  | 25000           | 5000           | 5000           | 5000          | 12000           | 25000          |
| Connector                                   |  | 10-32 UNF       | 3-56 UNF       | 3-56 UNF       | 3-56 UNF      | M3              | 10-32 UNF      |
| Mounting                                    |  | Adhesive        | Adhesive       | Adhesive       | Adhesive      | M5 Stud         | M3 Stud        |

\* Uni-Gain with  $\pm 2\%$  sensitivity tolerance, V-type with  $\pm 15\%$  sensitivity tolerance

† Lower frequency limit is determined by the amplifier used



| Type No.                                    |                            | 4393**†      | 8309             | 4521-C             | 4501-A           | 4500-A           |
|---|----------------------------|--------------|------------------|--------------------|------------------|------------------|
| Weight                                      | gram                       | 2.4          | 3                | 2.7                | 4.0              | 4.1              |
|   | (oz)                       | (0.085)      | (0.11)           | (0.1)              | (0.141)          | (0.145)          |
| Charge Sensitivity at 159.2 Hz              | $\text{pC}/\text{ms}^{-2}$ | 0.316        | 0.004            | 1.02               | 0.30             | 0.30             |
|   | ( $\text{pC}/\text{g}$ )   | (3.1)        | (0.04)           | (10)               | (2.9)            | (2.9)            |
| Frequency Range ( $\pm 10\%$ )‡             | Hz                         | 0.1 to 16500 | 1 to 54000       | 1 to 9000          | 1 to 10000       | 1 to 15000       |
| Mounted Resonance Frequency                 | kHz                        | 55           | 180              | 35                 | 30               | 45               |
| Operating Temperature Range                 | °C                         | -74 to +250  | -74 to +180      | -51 to +230        | -55 to +175      | -55 to +175      |
|   | °F                         | -101 to +482 | -101 to +356     | -60 to +446        | -67 to +347      | -67 to +347      |
| Measuring Range (peak)                      | g                          | 5000         | 15000            | 2000               | 3000             | 3000             |
| Maximum Non-destructive Shock ( $\pm$ peak) | g                          | 25000        | 100000           | 5000               | 3000             | 3000             |
| Connector                                   |                            | M3           | 10-32 UNF        | M3                 | 10-32 UNF        | 10-32 UNF        |
| Mounting                                    |                            | M3 Stud      | Integral M5 Stud | Insulated M2 Screw | Clip or Adhesive | Clip or Adhesive |

\* Uni-Gain with  $\pm 2\%$  sensitivity tolerance

† Also available as V type with relaxed sensitivity tolerance

‡ Lower frequency limit is determined by the amplifier used



| Type No.                                    |                            | 4507-C           | 4508-C           | 4505-A                     | 4505-001                   | 4371**†        | 4384**†        |
|---|----------------------------|------------------|------------------|----------------------------|----------------------------|----------------|----------------|
| Weight                                      | gram                       | 4.5              | 4.5              | 4.9                        | 4.9                        | 11             | 11             |
|   | (oz)                       | (0.16)           | (0.16)           | (0.17)                     | (0.17)                     | (0.39)         | (0.39)         |
| Charge Sensitivity at 159.2 Hz              | $\text{pC}/\text{ms}^{-2}$ | 0.45             | 0.45             | 0.30                       | 0.067                      | 1.0            | 1              |
|   | ( $\text{pC}/\text{g}$ )   | (4.4)            | (4.4)            | (2.9)                      | (0.66)                     | (9.8)          | (9.8)          |
| Frequency Range ( $\pm 10\%$ )‡             | Hz                         | 0.1 to 6000      | 0.1 to 8000      | 1 to 12000                 | 1 to 9000                  | 0.1 to 12600   | 0.1 to 12600   |
| Mounted Resonance Frequency                 | kHz                        | 18               | 25               | 45                         | 45                         | 42             | 42             |
| Operating Temperature Range                 | °C                         | -74 to +250      | -74 to +250      | -55 to +230                | -55 to +230                | -55 to +250    | -74 to +250    |
|   | °F                         | -101 to +482     | -101 to +482     | -67 to +446                | -67 to +446                | -67 to +482    | -101 to +482   |
| Measuring Range (peak)                      | g                          | 2000             | 2000             | 3000                       | 3000                       | 6000           | 6000           |
| Maximum Non-destructive Shock ( $\pm$ peak) | g                          | 5000             | 5000             | 3000                       | 3000                       | 20000          | 20000          |
| Connector                                   |                            | 10-32 UNF        | 10-32 UNF        | 10-32 UNF                  | 10-32 UNF                  | 10-32 UNF      | 10-32 UNF      |
| Mounting                                    |                            | Clip or Adhesive | Clip or Adhesive | Integral<br>10-32 UNF Stud | Integral<br>10-32 UNF Stud | 10-32 UNF Stud | 10-32 UNF Stud |

\* Uni-Gain with  $\pm 2\%$  sensitivity tolerance

† Also available as V type with relaxed sensitivity tolerance

‡ Lower frequency limit is determined by the amplifier used



| Type No.                                    |                     | 4382 <sup>*†</sup> | 4383 <sup>*†</sup> | 4381 <sup>*†</sup> | 4370 <sup>*†</sup> | 8346-C         |
|---|---------------------|--------------------|--------------------|--------------------|--------------------|----------------|
| Weight                                      | gram                | 17                 | 17                 | 43                 | 54                 | 176            |
|   | (oz)                | (0.6)              | (0.6)              | (1.52)             | (1.9)              | (6.2)          |
| Charge Sensitivity at 159.2 Hz              | pC/ms <sup>-2</sup> | 3.16               | 3.16               | 10                 | 10                 | 38             |
|   | (pC/g)              | (31)               | (31)               | (98)               | (98)               | (372)          |
| Frequency Range ( $\pm 10\%$ ) <sup>‡</sup> | Hz                  | 0.1 to 8400        | 0.1 to 8400        | 0.1 to 4800        | 0.1 to 4800        | 0.1 to 3000    |
| Mounted Resonance Frequency                 | kHz                 | 28                 | 28                 | 16                 | 16                 | 10             |
| Operating Temperature Range                 | °C                  | -74 to +250        | -74 to +250        | -74 to +250        | -74 to +250        | -50 to +250    |
|   | °F                  | -101 to +482       | -101 to +482       | -101 to +482       | -101 to +482       | -58 to +482    |
| Measuring Range (peak)                      | g                   | 2000               | 2000               | 2000               | 2000               | 2000           |
| Maximum Non-destructive Shock ( $\pm$ peak) | g                   | 5000               | 5000               | 2000               | 2000               | 5000           |
| Connector                                   |                     | 10-32 UNF          | 10-32 UNF          | 10-32 UNF          | 10-32 UNF          | 10-32 UNF      |
| Mounting                                    |                     | 10-32 UNF Stud     | 10-32 UNF Stud     | 10-32 UNF Stud     | 10-32 UNF Stud     | 10-32 UNF Stud |

\* Uni-Gain with  $\pm 2\%$  sensitivity tolerance

† Also available as V type with relaxed sensitivity tolerance

‡ Lower frequency limit is determined by the amplifier used

## Industrial Piezoelectric Charge Accelerometers

An industrial accelerometer with its rugged design is robust and reliable and covers a wide range of permanent vibration monitoring applications including operations in wet, dusty and potentially

explosive areas. Charge and CLLD types are both available. Charge types are especially excellent for high-temperature measurements.



| Type No.                                    |                     | 4391 <sup>*</sup> | 8315                                | 8324-100                            | 8347-C                              |
|---|---------------------|-------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Weight                                      | gram                | 16                | 62                                  | 60                                  | 60                                  |
|   | (oz)                | (0.56)            | (2.18)                              | (2.1)                               | (2.1)                               |
| Charge Sensitivity at 159.2 Hz              | pC/ms <sup>-2</sup> | 1                 | 10                                  | 1                                   | 1                                   |
|   | (pC/g)              | (9.8)             | (98)                                | (9.8)                               | (9.8)                               |
| Frequency Range ( $\pm 10\%$ ) <sup>†</sup> | Hz                  | 0.1 to 10000      | 1 to 10000                          | 1 to 12800                          | 1 to 12800                          |
| Mounted Resonance Frequency                 | kHz                 | 40                | 28                                  | 39                                  | 39                                  |
| Operating Temperature Range                 | °C                  | -60 to +180       | -53 to +260                         | -196 to +482                        | -196 to +482                        |
|   | °F                  | -76 to +356       | -63 to +500                         | -321 to +900                        | -321 to +900                        |
| Measuring Range (peak)                      | g                   | 2000              | 2000                                | 1000                                | 1000                                |
| Max. Non-destructive Shock ( $\pm$ peak)    | g                   | 2000              | 2000                                | 5000                                | 5000                                |
| Connector                                   |                     | TNC               | 2-pin<br>7/16-27 UNS<br>(2-pin TNC) | 2-pin<br>7/16-27 UNS<br>(2-pin TNC) | 2-pin<br>7/16-27 UNS<br>(2-pin TNC) |
| Mounting                                    |                     | 10-32 UNF<br>Stud | 3 x M4 Screw                        | 3 x M4 Screw<br>10-32 UNF<br>Stud   | 3 x M4 Screw<br>10-32 UNF<br>Stud   |

\* Also available as V type with relaxed sensitivity tolerance

† Lower frequency limit is determined by the amplifier used



# Triaxial Piezoelectric Charge Accelerometers





| Type No.                                      |  | 4326-A                             | 4326-A-001                         | 4326-001                           | 4321**                      | 4527-C                     |
|---|--|------------------------------------|------------------------------------|------------------------------------|-----------------------------|----------------------------|
| Description                                   |  | Triaxial                           | Triaxial                           | Dielectric rigidity<br>>1000 V     | Triaxial                    | Triaxial                   |
| Weight  | gram<br>(oz)                             | 13<br>(0.46)                       | 17<br>(0.6)                        | 17<br>(0.6)                        | 55<br>(1.94)                | 6<br>(0.21)                |
| Charge Sensitivity at 159.2 Hz                | $\text{pC}/\text{ms}^{-2}$<br>(pC/g)     | 0.30<br>(2.9)                      | 0.30<br>(2.9)                      | 0.30<br>(2.9)                      | 1<br>(9.8)                  | 0.316<br>(3.1)             |
| X Frequency Range ( $\pm 10\%$ ) <sup>‡</sup> | Hz                                       | 1 to 9000                          | 1 to 9000                          | 1 to 9000                          | 0.1 to 12000                | 1 to 10000                 |
| Y Frequency Range ( $\pm 10\%$ ) <sup>‡</sup> | Hz                                       | 1 to 8000                          | 1 to 8000                          | 1 to 8000                          | 0.1 to 12000                | 1 to 10000                 |
| Z Frequency Range ( $\pm 10\%$ ) <sup>‡</sup> | Hz                                       | 1 to 16000                         | 1 to 16000                         | 1 to 16000                         | 0.1 to 12000                | 1 to 12800                 |
| Mounted Resonance Frequency                   | kHz                                      | X:27, Y: 24,<br>Z: 48              | X:27, Y: 24,<br>Z: 48              | X:27, Y: 24,<br>Z: 48              | X, Y, Z: 40                 | X, Y: 30, Z: 42            |
| Operating Temperature Range                   | $^{\circ}\text{C}$<br>$^{\circ}\text{F}$ | -55 to +175<br>-67 to +347         | -55 to +230<br>-67 to +446         | -55 to +230<br>-67 to +446         | -74 to +250<br>-101 to +482 | -60 to +230<br>-76 to +446 |
| Measuring Range (peak)                        | g  | 3000                               | 3000                               | 3000                               | 500                         |                            |
| Maximum Non-destructive Shock ( $\pm$ peak)   | g  | 3000                               | 3000                               | 3000                               | 1000                        | 5100                       |
| Connector                                     |  | 10-32 UNF                          | 10-32 UNF                          | 10-32 UNF                          | 10-32 UNF                   | 4-pin,<br>1/4"-28 UNF      |
| Mounting                                      |  | M2 Screw/M3 Stud/<br>Clip/Adhesive | M2 Screw/M3 Stud/<br>Clip/Adhesive | M2 Screw/M3 Stud/<br>Clip/Adhesive | 10-32 UNF Stud/<br>M4 Screw | M3 Stud/Adhesive           |

\* Uni-Gain with  $\pm 2\%$  sensitivity tolerance

† Also available as V type with relaxed sensitivity tolerance

‡ Lower frequency limit is determined by the amplifier used

Frequency response of Type 4527-C using cable AO-0526 (left) and cable AO-0767 (right)

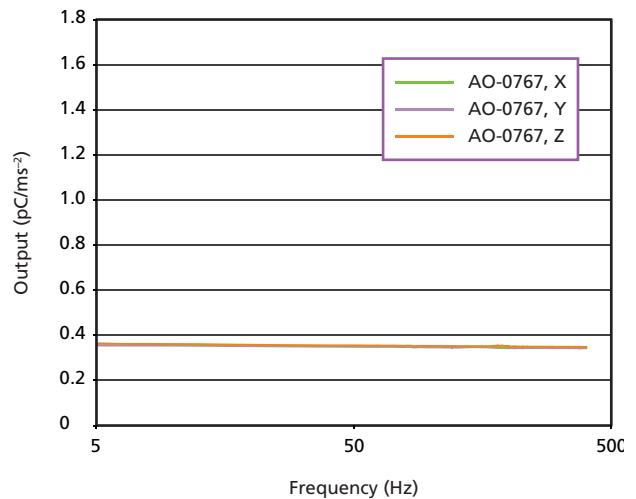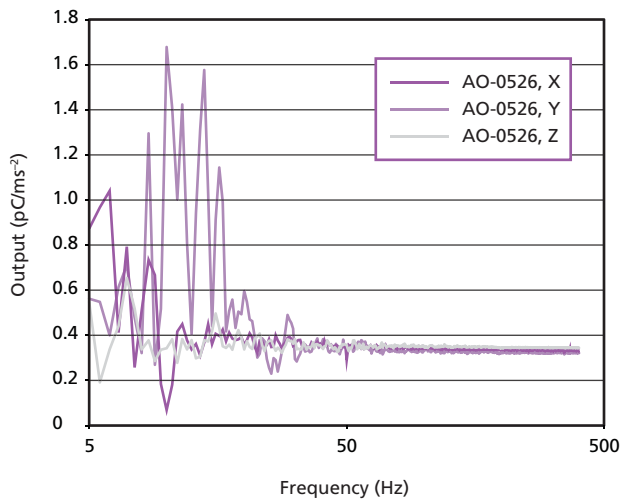

160010

# Uniaxial CCLD Accelerometers

A CCLD accelerometer is designed specifically to make vibration measurement easy because the needed preamplifier is built into the accelerometer unit. It features low impedance output enabling

the use of inexpensive cable and can drive long cables. For direct interchangeability and easy system calibration, most Brüel & Kjær piezoelectric accelerometers are Uni-Gain types.



| Type No.                                      |                               | 4517           | 4517-002       | 4516             | 4516-001         | 4518             | 4518-001         |
|---|-------------------------------|----------------|----------------|------------------|------------------|------------------|------------------|
| <b>Weight (excluding cable)</b>               | gram<br>(oz)                  | 0.65<br>(0.02) | 0.7<br>(0.035) | 1.5<br>(0.053)   | 1.5<br>(0.053)   | 1.5<br>(0.053)   | 1.45<br>(0.051)  |
| <b>Sensitivity at 159.2 Hz</b>                | mV/ms <sup>-2</sup><br>(mV/g) | 1.02 (10)      | 1.02 (10)      | 1.02 (10)        | 0.51 (5)         | 1.02 (10)        | 10.2 (100)       |
| <b>Frequency Range (±10%)</b>                 | Hz                            | 1 to 20000     | 1 to 20000     | 1 to 20000       | 1 to 20000       | 1 to 20000       | 1 to 20000       |
| <b>Mounted Resonance Frequency</b>            | kHz                           | 80             | 80             | 60               | 60               | 60               | 60               |
| <b>Operating Temperature Range</b>            | °C                            | -51 to +121    | -51 to +121    | -51 to +121      | -51 to +121      | -51 to +121      | -51 to +100      |
|   | °F                            | -60 to +250    | -60 to +250    | -60 to +250      | -60 to +250      | -60 to +250      | -60 to +212      |
| <b>Measuring Range (± peak)</b>               | g                             | 500            | 500            | 500              | 1000             | 500              | 50               |
| <b>Residual Noise Level*</b>                  | µg                            | 6000           | 6000           | 6000             | 6000             | 2000             | 900              |
| <b>Maximum Non-destructive Shock (± peak)</b> | g                             | 5000           | 5000           | 5000             | 5000             | 3000             | 3000             |
| <b>Connector</b>                              |                               | 3-56           | 3-56           | 10-32 UNF Female | 10-32 UNF Female | M3               | M3               |
| <b>Mounting</b>                               |                               | Adhesive       | Adhesive       | Adhesive         | Adhesive         | Integral M3 Stud | Integral M3 Stud |

\* Measured in specified frequency range



| Type No.                                      |                               | 4518-002        | 4518-003        | 4519             | 4519-001         | 4519-002       | 4519-003       |
|---|-------------------------------|-----------------|-----------------|------------------|------------------|----------------|----------------|
| <b>Weight</b>                                 | gram<br>(oz)                  | 1.45<br>(0.051) | 1.45<br>(0.051) | 1.6<br>(0.056)   | 1.6<br>(0.056)   | 1.5<br>(0.053) | 1.5<br>(0.053) |
| <b>Sensitivity at 159.2 Hz</b>                | mV/ms <sup>-2</sup><br>(mV/g) | 1.02<br>(10)    | 10.2<br>(100)   | 1.02<br>(10)     | 10.2<br>(100)    | 1.02<br>(10)   | 10.2<br>(100)  |
| <b>Frequency Range, (±10%)</b>                | Hz                            | 1 to 20000      | 1 to 20000      | 1 to 20000       | 1 to 20000       | 1 to 20000     | 1 to 20000     |
| <b>Mounted Resonance Frequency</b>            | kHz                           | 60              | 60              | 45               | 45               | 45             | 45             |
| <b>Operating Temperature Range</b>            | °C                            | -51 to +121     | -51 to +100     | -51 to +121      | -51 to +100      | -51 to +121    | -51 to +100    |
|   | °F                            | -60 to +250     | -60 to +212     | -60 to +250      | -60 to +212      | -60 to +250    | -60 to +212    |
| <b>Measuring Range (± peak)</b>               | g                             | 500             | 50              | 500              | 50               | 500            | 50             |
| <b>Residual Noise Level*</b>                  | µg                            | 2000            | 900             | 2000             | 900              | 2000           | <b>900</b>     |
| <b>Maximum Non-destructive Shock (± peak)</b> | g                             | 3000            | 3000            | 3000             | 3000             | 3000           | 3000           |
| <b>Connector</b>                              |                               | M3              | M3              | M3               | M3               | M3             | M3             |
| <b>Mounting</b>                               |                               | Adhesive        | Adhesive        | Integral M3 Stud | Integral M3 Stud | Adhesive       | Adhesive       |

\* Measured in specified frequency range



| Type No.                               |                     | 4397        | 4394*       | 4521                     | 4507          |
|--|---------------------|-------------|-------------|--------------------------|---------------|
| Weight                                 | gram                | 2.4         | 2.9         | 2.7                      | 4.8           |
|  | (oz)                | (0.085)     | (0.102)     | (0.095)                  | (0.17)        |
| Sensitivity at 159.2 Hz                | mV/ms <sup>-2</sup> | 1           | 1           | 1.02                     | 10            |
|  | (mV/g)              | (9.8)       | (9.8)       | (10)                     | (98)          |
| Frequency Range (±10%)                 | Hz                  | 1 to 25000  | 1 to 25000  | 1 to 9000                | 0.3 to 6000   |
| Mounted Resonance Frequency            | kHz                 | 53          | 52          | 35                       | 18            |
| Operating Temperature Range            | °C                  | -50 to +125 | -50 to +125 | -51 to +121              | -54 to +121   |
|  | °F                  | -58 to +257 | -58 to +257 | -60 to +250              | -65 to +250   |
| Measuring Range (± peak)               | g                   | 750         | 750         | 500                      | 70            |
| Residual Noise Level†                  | µg                  | 1500        | 2500        | 6000                     | 350           |
| Maximum Non-destructive Shock (± peak) | g                   | 10000       | 10000       | 2000                     | 5000          |
| Connector                              |                     | M3          | M3          | M3                       | 10-32 UNF     |
| Mounting                               |                     | M3 Stud     | M3 Stud     | Insulated M2 Centre Bolt | Clip/Adhesive |

\* With a ceramic isolated base

† Measured in specified frequency range



| Type No.                               |                     | 4507-001      | 4507-002      | 4507-B        | 4507-B-001    | 4507-B-002    | 4507-B-003  |
|--|---------------------|---------------|---------------|---------------|---------------|---------------|-------------|
| Weight                                 | gram                | 4.8           | 4.8           | 4.8           | 4.8           | 4.8           | 4.8         |
|  | (oz)                | (0.17)        | (0.17)        | (0.17)        | (0.17)        | (0.17)        | (0.17)      |
| Sensitivity at 159.2 Hz                | mV/ms <sup>-2</sup> | 1             | 100           | 10            | 1             | 100           | 10          |
|  | (mV/g)              | (9.8)         | (980)         | (98)          | (9.8)         | (980)         | (98)        |
| Frequency Range (±10%)                 | Hz                  | 0.1 to 6000   | 0.4 to 6000   | 0.3 to 6000   | 0.1 to 6000   | 0.4 to 6000   | 0.3 to 6000 |
| Mounted Resonance Frequency            | kHz                 | 18            | 18            | 18            | 18            | 18            | 18          |
| Operating Temperature Range            | °C                  | -54 to +121   | -54 to +100   | -54 to +121   | -54 to +121   | -54 to +100   | -54 to +121 |
|  | °F                  | -65 to +250   | -65 to +212   | -65 to +250   | -65 to +250   | -65 to +212   | -65 to +250 |
| Measuring Range (± peak)               | g                   | 700           | 7             | 70            | 700           | 7             | 70          |
| Residual Noise Level*                  | µg                  | 800           | 150           | 350           | 800           | 150           | 350         |
| Maximum Non-destructive Shock (± peak) | g                   | 5000          | 5000          | 5000          | 5000          | 5000          | 5000        |
| Connector                              |                     | 10-32 UNF     | 10-32 UNF     | 10-32 UNF     | 10-32 UNF     | 10-32 UNF     | 10-32 UNF   |
| Mounting                               |                     | Clip/Adhesive | Clip/Adhesive | Clip/Adhesive | Clip/Adhesive | Clip/Adhesive | Adhesive    |

\* Measured in specified frequency range



| Type No.                       |                     | 4507-B-004    | 4507-B-005    | 4507-B-006    | 4508          | 4508-001      | 4508-002      |
|--------------------------------|---------------------|---------------|---------------|---------------|---------------|---------------|---------------|
| Weight                         | gram                | 4.6           | 4.6           | 4.6           | 4.8           | 4.8           | 4.8           |
|                                | (oz)                | (0.16)        | (0.16)        | (0.16)        | (0.17)        | (0.17)        | (0.17)        |
| Sensitivity at 159.2 Hz        | $\text{mV/ms}^{-2}$ | 10            | 100           | 50            | 10            | 1             | 100           |
|                                | (mV/g)              | (98)          | (980)         | (490)         | (98)          | (9.8)         | (980)         |
| Frequency Range ( $\pm 10\%$ ) | Hz                  | 0.3 to 6000   | 0.4 to 6000   | 0.2 to 6000   | 0.3 to 8000   | 0.1 to 8000   | 0.4 to 8000   |
| Mounted Resonance Frequency    | kHz                 | 18            | 18            | 18            | 25            | 25            | 25            |
| Operating Temperature Range    | $^{\circ}\text{C}$  | -54 to +121   | -54 to +100   | -54 to +100   | -54 to +121   | -54 to +121   | -54 to +100   |
|                                | $^{\circ}\text{F}$  | -65 to +250   | -65 to +212   | -65 to +212   | -65 to +250   | -65 to +250   | -65 to +212   |
| Measuring Range ( $\pm$ peak)  | g                   | 70            | 7             | 14            | 70            | 700           | 7             |
| Residual Noise Level**         | $\mu\text{g}$       | 350           | 150           | 160           | 350           | 800           | 150           |
| Maximum Shock ( $\pm$ peak)    | g                   | 5000          | 5000          | 5000          | 5000          | 5000          | 5000          |
| Connector                      |                     | 10-32 UNF     | 10-32 UNF     | 10-32 UNF     | 10-32 UNF     | 10-32 UNF     | 10-32 UNF     |
| Mounting                       |                     | Clip/Adhesive | Clip/Adhesive | Clip/Adhesive | Clip/Adhesive | Clip/Adhesive | Clip/Adhesive |

\* Measured in specified frequency range



| Type No.                                    |                     | 4508-B        | 4508-B-001    | 4508-B-002    | 4508-B-003  | 4508-B-004    | 4526           |
|---|---------------------|---------------|---------------|---------------|-------------|---------------|----------------|
| Weight                                      | gram                | 4.8           | 4.8           | 4.8           | 4.8         | 4.8           | 5              |
|   | (oz)                | (0.17)        | (0.17)        | (0.17)        | (0.17)      | (0.17)        | (0.18)         |
| Sensitivity at 159.2 Hz                     | $\text{mV/ms}^{-2}$ | 10            | 1             | 100           | 10          | 50            | 10             |
|   | (mV/g)              | (98)          | (9.8)         | (980)         | (98)        | (490)         | (98)           |
| Frequency Range ( $\pm 10\%$ )              | Hz                  | 0.3 to 8000   | 0.1 to 8000   | 0.4 to 8000   | 0.3 to 8000 | 0.2 to 8000   | 0.3 to 8000    |
| Mounted Resonance Frequency                 | kHz                 | 25            | 25            | 25            | 25          | 25            | 25             |
| Operating Temperature Range                 | $^{\circ}\text{C}$  | -54 to +121   | -54 to +121   | -54 to +100   | -54 to +121 | -54 to +100   | -54 to +180    |
|   | $^{\circ}\text{F}$  | -65 to +250   | -65 to +250   | -65 to +212   | -65 to +250 | -65 to +212   | -65 to +356    |
| Measuring Range ( $\pm$ peak)               | g                   | 70            | 700           | 7             | 70          | 14            | 70             |
| Residual Noise Level*                       | $\mu\text{g}$       | 350           | 800           | 150           | 350         | 160           | 350            |
| Maximum Non-destructive Shock ( $\pm$ peak) | g                   | 5000          | 5000          | 5000          | 5000        | 5000          | 5000           |
| Connector                                   |                     | 10-32 UNF     | 10-32 UNF     | 10-32 UNF     | 10-32 UNF   | 10-32 UNF     | 10-32 UNF      |
| Mounting                                    |                     | Clip/Adhesive | Clip/Adhesive | Clip/Adhesive | Adhesive    | Clip/Adhesive | 10-32 UNF Stud |

\* Measured in specified frequency range



| Type No.                                    |              | 4526-001       | 4526-002    | 8339                       | 8339-001                   | 4534-B         | 4534-B-001     |
|---|--------------|----------------|-------------|----------------------------|----------------------------|----------------|----------------|
| Weight                                      | gram         | 5              | 5           | 5.8                        | 5.8                        | 8.6            | 8.6            |
|   | (oz)         | (0.18)         | (0.18)      | (0.204)                    | (0.204)                    | (0.3)          | (0.3)          |
| Sensitivity at 159.2 Hz                     | $mV/ms^{-2}$ | 1              | 10          | 0.025                      | 0.01                       | 1              | 10             |
|   | (mV/g)       | (9.8)          | (98)        | (0.25)                     | (0.1)                      | (9.8)          | (98)           |
| Frequency Range ( $\pm 10\%$ )              | Hz           | 0.1 to 8000    | 0.3 to 8000 | 1 to 20000                 | 1 to 20000                 | 0.2 to 12800   | 0.2 to 12800   |
| Mounted Resonance Frequency                 | kHz          | 25             | 25          | >130                       | >130                       | 38             | 38             |
| Operating Temperature Range                 | $^{\circ}C$  | -54 to +180    | -54 to +165 | -51 to +121                | -51 to +121                | -55 to +125    | -55 to +125    |
|   | $^{\circ}F$  | -65 to +356    | -65 to +329 | -60 to +250                | -60 to +250                | -67 to +257    | -67 to +257    |
| Measuring Range ( $\pm$ peak)               | g            | 700            | 700         | 20000                      | 50000                      | 700            | 70             |
| Residual Noise Level*                       | $\mu g$      | 800            | 350         | 150                        | 350                        | 500            | 130            |
| Maximum Non-destructive Shock ( $\pm$ peak) | g            | 5000           | 5000        | 80000                      | 80000                      | 10000          | 10000          |
| Connector                                   |              | 10-32 UNF      | 10-32 UNF   | 10-32 UNF                  | 10-32 UNF                  | 10-32 UNF      | 10-32 UNF      |
| Mounting                                    |              | 10-32 UNF Stud | Adhesive    | Integral<br>10-32 UNF Stud | Integral<br>10-32 UNF Stud | 10-32 UNF Stud | 10-32 UNF Stud |

\* Measured in specified frequency range




| Type No.                                    |              | 4534-B-002     | 4534-B-004     | 4533-B         | 4533-B-001     | 4533-B-002     | 4533-B-004     |
|---|--------------|----------------|----------------|----------------|----------------|----------------|----------------|
| Weight                                      | gram         | 8.6            | 8.6            | 8.6            | 8.6            | 8.6            | 8.6            |
|   | (oz)         | (0.3)          | (0.3)          | (0.3)          | (0.3)          | (0.3)          | (0.3)          |
| Sensitivity at 159.2 Hz                     | $mV/ms^{-2}$ | 50             | 5              | 1              | 10             | 50             | 5              |
|   | (mV/g)       | (490)          | (49)           | (9.8)          | (98)           | (490)          | (49)           |
| Frequency Range ( $\pm 10\%$ )              | Hz           | 0.3 to 12800   | 0.2 to 12800   | 0.2 to 12800   | 0.2 to 12800   | 0.3 to 12800   | 0.2 to 12800   |
| Mounted Resonance Frequency                 | kHz          | 38             | 38             | 38             | 38             | 38             | 38             |
| Operating Temperature Range                 | $^{\circ}C$  | -55 to +125    | -55 to +125    | -55 to +125    | -55 to +125    | -55 to +125    | -55 to +125    |
|   | $^{\circ}F$  | -67 to +257    | -67 to +257    | -67 to +257    | -67 to +257    | -67 to +257    | -67 to +257    |
| Measuring Range ( $\pm$ peak)               | g            | 14             | 140            | 700            | 70             | 14             | 140            |
| Residual Noise Level*                       | $\mu g$      | 100            | 140            | 500            | 130            | 100            | 140            |
| Maximum Non-destructive Shock ( $\pm$ peak) | g            | 10000          | 10000          | 10000          | 10000          | 10000          | 10000          |
| Connector                                   |              | 10-32 UNF      | 10-32 UNF      | 10-32 UNF      | 10-32 UNF      | 10-32 UNF      | 10-32 UNF      |
| Mounting                                    |              | 10-32 UNF Stud | 10-32 UNF Stud | 10-32 UNF Stud | 10-32 UNF Stud | 10-32 UNF Stud | 10-32 UNF Stud |

\* Measured in specified frequency range

| Type No.                                      |                               | <b>4511-001</b>               | <b>4511-006</b>                  | <b>4523</b>    |
|---|-------------------------------|-------------------------------|----------------------------------|----------------|
| <b>Weight</b>                                 | gram<br>(oz)                  | 35<br>(1.23)                  | 35<br>(1.23)                     | 13.3<br>(0.47) |
| <b>Sensitivity at 159.2 Hz</b>                | mV/ms <sup>-2</sup><br>(mV/g) | 1<br>(9.8)                    | 1<br>(9.8)                       | 1<br>(9.8)     |
| <b>Frequency Range (±10%)</b>                 | Hz                            | 1 to 15000                    | 2 to 25000                       | 1 to 15000     |
| <b>Mounted Resonance Frequency</b>            | kHz                           | 43                            | 43                               | 43             |
| <b>Operating Temperature Range</b>            | °C                            | -54 to +150                   | -54 to +150                      | -54 to +150    |
|   | °F                            | -65 to +302                   | -65 to +302                      | -65 to +302    |
| <b>Measuring Range (± peak)</b>               | g                             | 500                           | 500                              | 500            |
| <b>Residual Noise Level*</b>                  | µg                            | 1000                          | 1000                             | 2000           |
| <b>Maximum Non-destructive Shock (± peak)</b> | g                             | 5000                          | 5000                             | 5000           |
| <b>Connector</b>                              |                               | 3-pin HiRel                   | 3-pin Series 800<br>Mighty Mouse | 10-32 UNF      |
| <b>Mounting</b>                               |                               | M4 Centre Bolt/10-32 UNF Stud | M4 Centre Bolt                   | M4 Centre Bolt |

\* Measured in specified frequency range

Types 4511 and 4523 have been specifically designed for Health Usage Monitoring of gearboxes on helicopters, are flight-test certified, and all processes and materials comply with MIL-STD-11268. The primary design objective has been reliability under extreme conditions yielding very high robustness versus mechanical, electrical and environmental influences.

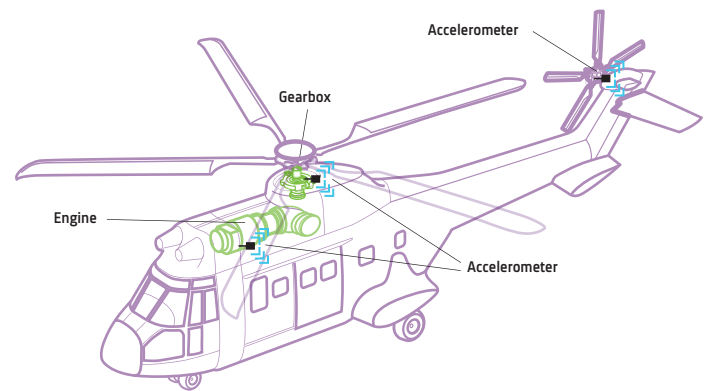



| Type No.                               |                     | 5958-A*          | 5958-H*          | 8340                    | 8344        | 8344-B-001   |
|--|---------------------|------------------|------------------|-------------------------|-------------|--------------|
| Weight                                 | gram                | 44               | 44               | 775                     | 176         | 176          |
|  | (oz)                | (1.55)           | (1.55)           | (27.33)                 | (6.2)       | (6.2)        |
| Sensitivity at 159.2 Hz                | mV/ms <sup>-2</sup> | 1                | 1                | 1020                    | 250         | 50           |
|  | (mV/g)              | (9.8)            | (9.8)            | (10000)                 | (2450)      | (490)        |
| Frequency Range (±10%)                 | Hz                  | 0.3 to 11000     | 0.3 to 11000     | 0.1 to 1500             | 0.2 to 3000 | 0.05 to 3000 |
| Mounted Resonance Frequency            | kHz                 | 45               | 45               | 7                       | 10          | 10           |
| Operating Temperature Range            | °C                  | -50 to +100      | -50 to +100      | -51 to +74              | -50 to +100 | -58 to +212  |
|  | °F                  | -58 to +212      | -58 to +212      | -60 to +165             | -58 to +212 | -58 to +212  |
| Measuring Range (± peak)               | g                   | 500              | 500              | 0.5                     | 2.6         | 14           |
| Residual Noise Level†                  | µg                  | 1500             | 1500             | 25                      | 18          | 18           |
| Maximum Non-destructive Shock (± peak) | g                   | 2000             | 2000             | 100                     | 350         | 350          |
| Connector                              |                     | BNC              | Open End         | MIL-C-5015<br>2-pin TNC | 10-32 UNF   | 10-32 UNF    |
| Mounting                               |                     | Integral         | Integral         | 1/4"-28 UNF             | M5 Stud     | M5 Stud      |
|  |                     | 1/4"-28 UNF Stud | 1/4"-28 UNF Stud | Stud                    |             |              |

\* Available in four versions. Cable lengths 10, 30, 50 and 100 m

† Measured in specified frequency range

## Industrial CCLD Accelerometers

An industrial accelerometer with its rugged design is robust and reliable and covers a wide range of permanent vibration monitoring applications including operations in wet, dusty and potentially

explosive areas. Charge and CCLD types are both available. Charge types are especially excellent for high-temperature measurements.



| Type No.                            |                     | 8341             | 8324-G                 | 8324-G-001             | 8324-G-002             | 8345                             |
|-------------------------------------|---------------------|------------------|------------------------|------------------------|------------------------|----------------------------------|
| Description                         |                     | Top Connector    | TEDS<br>Side Connector | TEDS<br>Side Connector | TEDS<br>Side Connector | Triaxial<br>Side Connector       |
| Weight                              | gram                | 41               | 91                     | 91                     | 91                     | 50                               |
|                                     | (oz)                | (1.44)           | (3.15)                 | (3.15)                 | (3.15)                 | (1.76)                           |
| Sensitivity at 159.2 Hz             | mV/ms <sup>-2</sup> | 10.2             | 1                      | 1                      | 1                      | 10                               |
|                                     | (mV/g)              | (100)            | (9.8)                  | (9.8)                  | (9.8)                  | (98)                             |
| Frequency Range (±10%)              | Hz                  | 0.3 to 10000     | 1 to 9000              | 100 to 9000            | 100 to 9000            | 2 to 2000                        |
| Mounted Resonance Frequency         | kHz                 | 27               | 30                     | 30                     | 30                     | 18                               |
| Operating Temperature Range         | °C                  | -51 to +121      | -196 to +250           | -196 to +250           | -196 to +250           | -45 to +125                      |
|                                     | °F                  | -60 to +250      | -321 to +482           | -321 to +482           | -321 to +482           | -49 to +257                      |
| Measuring Range (± peak)            | g                   | 50               | 500                    | 500                    | 500                    | 200                              |
| Max. Non-destructive Shock (± peak) | g                   | 5000             | 2000                   | 2000                   | 2000                   | 5000                             |
| Connector                           |                     | MIL-C-5015       | BNC                    | BNC                    | LEMO                   | 4-pin Series 800<br>Mighty Mouse |
| Mounting                            |                     | 1/4"-28 UNF Stud | 3 × M4 Screw           | 3 × M4 Screw           | 3 × M4 Screw           | 3 × M4 Screw                     |

# Triaxial CCLD Accelerometers



| Type No.   |  | 4520   | 4520-001                                     | 4520-002                                     | 4520-004                                     | 4524   | 4524-B   |
|--|--|--|--|--|--|--|--|
| <b>Weight</b>  | gram<br>(oz)                             | 2.9<br>(0.1)                                 | 4<br>(0.14)                                  | 3.6<br>(0.127)                               | 4<br>(0.14)                                  | 4.4<br>(0.15)  | 4.8<br>(0.17)  |
| <b>Sensitivity at 159.2 Hz</b>                               | $\text{mV/ms}^{-2}$<br>(mV/g)            | 1.02<br>(10)                                 | 1.02<br>(10)                                 | 1.02<br>(10)                                 | 0.1<br>(1)                                   | 10<br>(98)   | 10<br>(98)   |
| <b>Frequency Range (<math>\pm 10\%</math>)</b>               | Hz                                       | X: 2 to 7000<br>Y: 2 to 7000<br>Z: 2 to 7000 | X: 2 to 4000<br>Y: 2 to 4000<br>Z: 2 to 7000 | X: 2 to 4000<br>Y: 2 to 4000<br>Z: 2 to 7000 | X: 2 to 4000<br>Y: 2 to 4000<br>Z: 2 to 7000 | X: 0.2 to 5500<br>Y: 0.25 to 3000<br>Z: 0.25 to 3000 | X: 0.2 to 5500<br>Y: 0.25 to 3000<br>Z: 0.25 to 3000 |
| <b>Mounted Resonance Frequency</b>                           | kHz                                      | X, Y: 30,<br>Z: 40                           | X: 20, Y: 25,<br>Z: 30                       | X: 20, Y: 25,<br>Z: 30                       | X: 20, Y: 25,<br>Z: 30                       | X: 18, Y: 9,<br>Z: 9                                 | X: 18, Y: 9,<br>Z: 9                                 |
| <b>Operating Temperature Range</b>                           | $^{\circ}\text{C}$<br>$^{\circ}\text{F}$ | $-51$ to $+121$<br>$-60$ to $+250$           | $-51$ to $+121$<br>$-60$ to $+250$           | $-51$ to $+121$<br>$-60$ to $+250$           | $-51$ to $+121$<br>$-60$ to $+250$           | $-54$ to $+100$<br>$-65$ to $+212$                   | $-54$ to $+100$<br>$-65$ to $+212$                   |
| <b>Measuring Range (<math>\pm</math> peak)</b>               | g  | 500  | 500  | 500  | 5000   | 50   | 50   |
| <b>Residual Noise Level*</b>                                 | $\mu\text{g}$                            | 7000   | 7000   | 7000   | 56000  | X: 400<br>Y: 200<br>Z: 200                           | X: 400<br>Y: 200<br>Z: 200                           |
| <b>Maximum Non-destructive Shock (<math>\pm</math> peak)</b> | g  | 5000   | 5000   | 5000   | 5000   | 5000   | 5000   |
| <b>Connector</b>   |  | 4-pin,<br>1/4"–28 UNF                        | 4-pin,<br>1/4"–28 UNF                        | 4-pin,<br>1/4"–28 UNF                        | 4-pin,<br>1/4"–28 UNF                        | 4-pin,<br>1/4"–28 UNF                                | 4-pin,<br>1/4"–28 UNF                                |
| <b>Mounting</b>  |  | Adhesive                                     | M3/Adhesive                                  | Clip/Adhesive                                | M3/Adhesive                                  | Adhesive/Clip  | Adhesive/Clip  |

\* Measured in specified frequency range





| Type No.                                    |              | 4524-B-001            | 4524-B-004            | 4535-B                | 4535-B-001            | 4535-B-003            |
|---|--------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Weight                                      | gram         | 4.8                   | 4.8                   | 6                     | 6                     | 4.8                   |
|   | (oz)         | (0.17)                | (0.17)                | (0.21)                | (0.21)                | (0.17)                |
| Sensitivity at 159.2 Hz                     | $mV/ms^{-2}$ | 1                     | 5                     | 1                     | 10                    | .1                    |
|   | (mV/g)       | (9.8)                 | (49)                  | (9.8)                 | (98)                  | (.98)                 |
| Frequency Range ( $\pm 10\%$ )              | Hz           | X: 0.2 to 5500        | X: 0.2 to 5500        | X: 0.3 to 10000       | X: 0.3 to 10000       | X: 0.3 to 10000       |
|   |              | Y: 0.25 to 3000       | Y: 0.25 to 3000       | Y: 0.3 to 10000       | Y: 0.3 to 10000       | Y: 0.3 to 10000       |
|   |              | Z: 0.25 to 3000       | Z: 0.25 to 3000       | Z: 0.3 to 12800       | Z: 0.3 to 12800       | Z: 0.3 to 12800       |
| Mounted Resonance Frequency                 | kHz          | X: 18, Y, Z: 9        | X: 18, Y, Z: 9        | X, Y: 30, Z: 42       | X, Y: 30, Z: 42       | X, Y: 30, Z: 42       |
| Operating Temperature Range                 | $^{\circ}C$  | -54 to +100           | -54 to +100           | -60 to +125           | -60 to +125           | -60 to +125           |
|   | $^{\circ}F$  | -65 to +212           | -55 to +212           | -76 to +257           | -76 to +257           | -76 to +257           |
| Measuring Range ( $\pm$ peak)               | g            | 500                   | 100                   | 700                   | 70                    | 5100                  |
| Residual Noise Level*                       | $\mu g$      | X: 500                | X: 800                | 900                   | 600                   | 6000                  |
|   |              | Y: 400                | Y: 600                |                       |                       |                       |
|   |              | Z: 400                | Z: 600                |                       |                       |                       |
| Maximum Non-destructive Shock ( $\pm$ peak) | g            | 5000                  | 5000                  | 5100                  | 5100                  | 5100                  |
| Connector                                   |              | 4-pin,<br>1/4"-28 UNF | 4-pin,<br>1/4"-28 UNF | 4-pin,<br>1/4"-28 UNF | 4-pin,<br>1/4"-28 UNF | 4-pin,<br>1/4"-28 UNF |
| Mounting                                    |              | Adhesive/Clip         | Adhesive/Clip         | M3 Stud/Adhesive      | M3 Stud/Adhesive      | M3 Stud/Adhesive      |

\* Measured in specified frequency range



| Type No.                                    |              | 4527                  | 4527-001              | 4527-003              | 4528-B                | 4528-B-001            | 4528-B-003            |
|---|--------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|
| Weight                                      | gram         | 6                     | 6                     | 4.8                   | 6                     | 6                     | 4.8                   |
|   | (oz)         | (0.21)                | (0.21)                | (0.17)                | (0.21)                | (0.21)                | (0.17)                |
| Sensitivity at 159.2 Hz                     | $mV/ms^{-2}$ | 1                     | 10                    | .1                    | 1                     | 10                    | .1                    |
|   | (mV/g)       | (9.8)                 | (98)                  | (.98)                 | (9.8)                 | (98)                  | (.98)                 |
| Frequency Range ( $\pm 10\%$ )              | Hz           | X: 0.3 to 10000       | X: 0.3 to 10000       | X: 0.3 to 10000       | X: 0.3 to 10000       | X: 0.3 to 10000       | X: 0.3 to 10000       |
|   |              | Y: 0.3 to 10000       | Y: 0.3 to 10000       | Y: 0.3 to 10000       | Y: 0.3 to 10000       | Y: 0.3 to 10000       | Y: 0.3 to 10000       |
|   |              | Z: 0.3 to 12800       | Z: 0.3 to 12800       | Z: 0.3 to 12800       | Z: 0.3 to 12800       | Z: 0.3 to 12800       | Z: 0.3 to 12800       |
| Mounted Resonance Frequency                 | kHz          | X, Y: 30, Z: 42       | X, Y: 30, Z: 42       | X, Y: 30, Z: 42       | X, Y: 30, Z: 42       | X, Y: 30, Z: 42       | X, Y: 30, Z: 42       |
| Operating Temperature Range                 | $^{\circ}C$  | -54 to +180           | -54 to +180           | -54 to +180           | -60 to +165           | -60 to +165           | -60 to +165           |
|   | $^{\circ}F$  | -65 to 356            | -65 to 356            | -65 to 356            | -76 to 329            | -76 to 329            | -76 to +329           |
| Measuring Range ( $\pm$ peak)               | g            | 510                   | 51                    | 5100                  | 510                   | 51                    | 5100                  |
| Residual Noise Level*                       | $\mu g$      | 900                   | 600                   | 6000                  | 900                   | 600                   | 6000                  |
|   |              |                       |                       |                       |                       |                       |                       |
|   |              |                       |                       |                       |                       |                       |                       |
| Maximum Non-destructive Shock ( $\pm$ peak) | g            | 5000                  | 5000                  | 5100                  | 5100                  | 5100                  | 5100                  |
| Connector                                   |              | 4-pin,<br>1/4"-28 UNF | 4-pin,<br>1/4"-28 UNF | 4-pin,<br>1/4"-28 UNF | 4-pin,<br>1/4"-28 UNF | 4-pin,<br>1/4"-28 UNF | 4-pin,<br>1/4"-28 UNF |
| Mounting                                    |              | M3<br>Stud/Adhesive   | M3<br>Stud/Adhesive   | M3<br>Stud/Adhesive   | M3<br>Stud/Adhesive   | M3<br>Stud/Adhesive   | M3<br>Stud/Adhesive   |

\* Measured in specified frequency range



| Type No.                               |                            | 4529-B  | 4529-B-001  | 4506-B-003   | 4504-A   | 4515-B   | 4515-B-002   |
|--|----------------------------|---|---|--|--|--|--|
| Weight                                 | gram (oz)                  | 14.5 (0.51)   | 14.5 (0.51)   | 18 (0.63)  | 15 (0.24)                                      | 345 (12.2)   | 345 (12.2)   |
| Sensitivity at 159.2 Hz                | mV/ms <sup>-2</sup> (mV/g) | 10 (98)   | 1 (9.8)   | 50 (490)   | 1 (9.8)  | 10 (98)  | 10 (98)  |
| Frequency Range (±10%)                 | Hz                         | X: 0.3 to 12800<br>Y: 0.3 to 6000*<br>Z: 0.6 to 6000* | X: 0.3 to 12800<br>Y: 0.3 to 6000*<br>Z: 0.6 to 6000* | X: 0.3 to 4000<br>Y: 0.3 to 2000<br>Z: 0.3 to 2000 | X: 1 to 11000<br>Y: 1 to 9000<br>Z: 1 to 18000 | X: 0.25 to 900<br>Y: 0.25 to 900<br>Z: 0.25 to 900 | X: 0.25 to 900<br>Y: 0.25 to 900<br>Z: 0.25 to 900 |
| Mounted Resonance Frequency            | kHz                        | X: 39, Y, Z: 19                                       | X: 39, Y, Z: 19                                       | X: 14, Y, Z: 7                                     | X: 26, Y: 23, Z: 44                            | >2700  | 2700   |
| Operating Temperature Range            | °C<br>°F                   | -60 to +125<br>-76 to +257                            | -60 to +125<br>-76 to +257                            | -54 to +100<br>-65 to +212                         | -50 to +125<br>-58 to +257                     | -10 to +70<br>+14 to +158                          | -10 to +70<br>+14 to +158                          |
| Measuring Range (± peak)               | g                          | 71  | 710   | 14   | 500  | 50   | 50   |
| Residual Noise Level*                  | µg                         | X: 600<br>Y: 300<br>Z: 200                            | X: 900<br>Y: 500<br>Z: 400                            | X: 120<br>Y: 60<br>Z: 60                           | 4000   | X: 400<br>Y: 200<br>Z: 200                         | X: 400<br>Y: 200<br>Z: 200                         |
| Maximum Non-destructive Shock (± peak) | g                          | 5100  | 5100  | 2000   | 3000   | 5000   | 5000   |
| Connector                              |                            | 4-pin,<br>1/4"-28 UNF                                 | 4-pin,<br>1/4"-28 UNF                                 | 4-pin,<br>1/4"-28 UNF                              | 10-32 UNF                                      | 3 × 10-32 UNF                                      | 4-pin LEMO   |

\* Measured in specified frequency range

## Amplified Piezoresistive Accelerometers

Amplified piezoresistive accelerometers are designed for measuring relatively low-level accelerations in aerospace and automotive environments. Typical applications require measurement of whole body motion immediately after the accelerometer is subjected to a shock motion, and in the presence of severe vibrational inputs.

Büel & Kjær's amplified piezoresistive accelerometers, the Type 457x series, include D versions with superior temperature stability:


- 457X and 457X-D: Open-ended
- 457X-001 and 457X-D-001: 7-pin LEMO termination
- 457X-002 and 457X-D-002: 9-pin sub D termination



| Type No.                                      |                            | 4570                                   | 4571                                   | 4572                                   | 4573                                   | 4574                                   | 4575                                   |
|---|----------------------------|--|--|--|--|--|--|
| Maximum Linear Range (peak)                   | g                          | 500                                    | 200                                    | 100                                    | 30                                     | 10                                     | 2                                      |
| Frequency Range (±10%)                        | Hz                         | 0 to 1850                              | 0 to 1850                              | 0 to 1850                              | 0 to 850                               | 0 to 500                               | 0 to 300                               |
| Sensitivity at 159.2 Hz                       | mV/ms <sup>-2</sup> (mV/g) | 0.4 (4)                                | 1 (10)                                 | 2 (20)                                 | 6.7 (67)                               | 20 (200)                               | 100 (1000)                             |
| Residual Noise Level in Spec. Frequency Range | µg (RMS)                   | 150000                                 | 65000                                  | 23000                                  | 11000                                  | 1800                                   | 500                                    |
| Operating Temperature Range                   | °C<br>°F                   | -55 to +121<br>-65 to +250             | -55 to +121<br>-65 to +250             | -55 to +121<br>-65 to +250             | -55 to +121<br>-65 to +250             | -55 to +121<br>-65 to +250             | -55 to +121<br>-65 to +250             |
| Maximum Non-destructive Shock (± peak)        | g                          | 10000                                  | 10000                                  | 10000                                  | 10000                                  | 10000                                  | 10000                                  |
| Weight  | gram (oz)                  | 8 (0.28)                               | 8 (0.28)                               | 8 (0.28)                               | 8 (0.28)                               | 8 (0.28)                               | 8 (0.28)                               |
| Cable/Connector                               |                            | 3 m Integral Cable                     | 3 m Integral Cable                     | 3 m Integral Cable                     | 3 m Integral Cable                     | 3 m Integral Cable                     | 3 m Integral Cable                     |
| Mounting                                      |                            | 4-40 UNC or M3 Screws                  | 4-40 UNC or M3 Screws                  | 4-40 UNC or M3 Screws                  | 4-40 UNC or M3 Screws                  | 4-40 UNC or M3 Screws                  | 4-40 UNC or M3 Screws                  |
| Accessory Included                            |                            | 2 × 4-40 UNC Screw, Hex Wrench QA-0013 | 2 × 4-40 UNC Screw, Hex Wrench QA-0013 | 2 × 4-40 UNC Screw, Hex Wrench QA-0013 | 2 × 4-40 UNC Screw, Hex Wrench QA-0013 | 2 × 4-40 UNC Screw, Hex Wrench QA-0013 | 2 × 4-40 UNC Screw, Hex Wrench QA-0013 |

# Connection Examples to Measurement and Analysis Devices

● Female  
○ Male

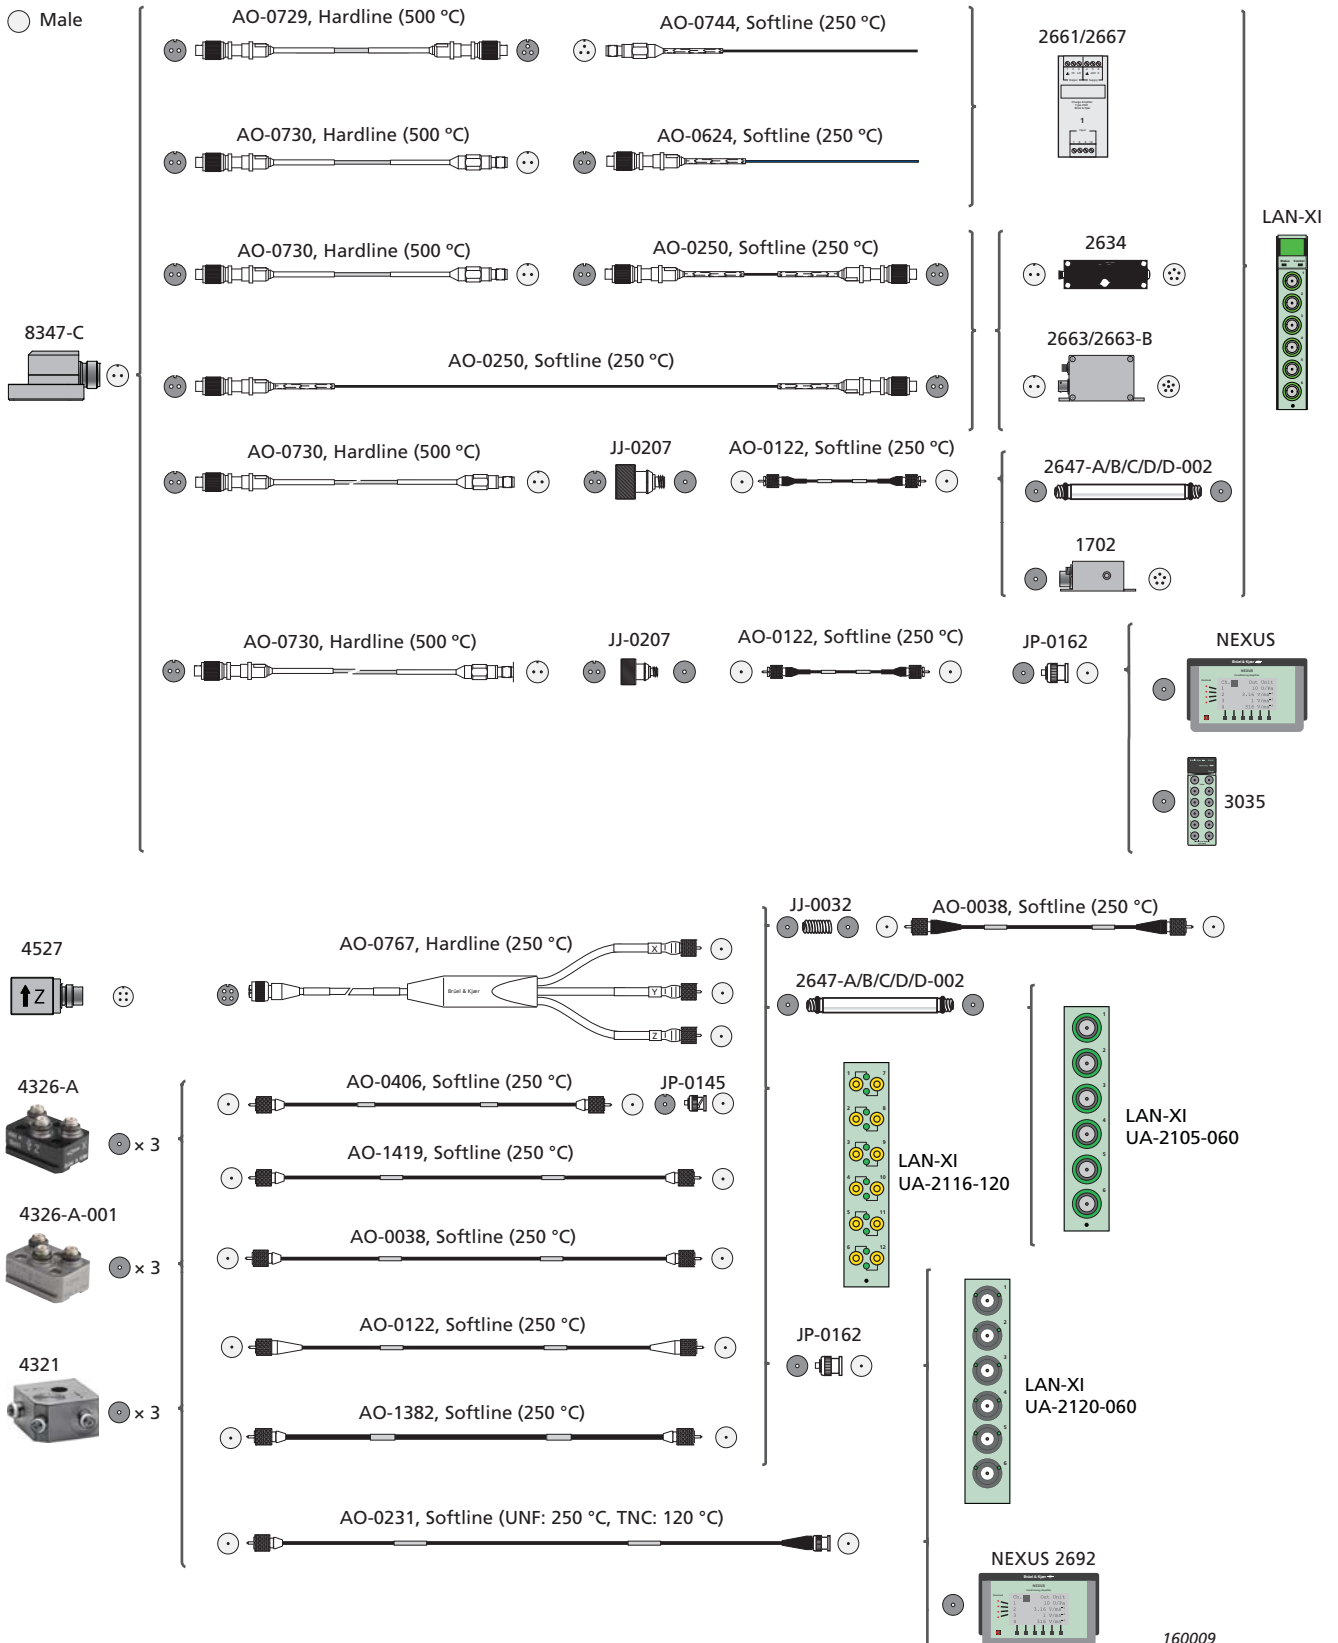

# NON-CONTACT TRANSDUCERS

## Non-contact Transducers for Speed, Velocity and Displacement

Brüel & Kjær's non-contact transducers are used for contact-free target detection, velocity and displacement detection without loading the structure under test. Another common use for the transducer signal is as an input to a tachometer to measure rotational speed (RPM). In some applications, Magnetic Transducer

MM-0002 can even be used to excite the test structure using the transducer as a miniature contact-free electromagnetic vibration exciter for non-contact vibration excitation. This is used for determination of elastic properties of materials.




| Type No.                    |    | MM-0002                             | MM-0004                                | 2981   | 2981-A*  |
|-----------------------------|----|-------------------------------------|--|--|--|
| Signal Outputs              |    | Velocity or Trigger for tachometer  | Displacement or Trigger for tachometer | Trigger for tachometer   | Trigger for tachometer                               |
| Detection Principle         |    | Variable reluctance                 | Capacitive                             | Visible laser and receiver   | Visible laser and receiver through fibre-optic cable |
| Conditioning                |    | None (self-generating)              | 200 V from Type 2669 or similar        | CCLD   | CCLD   |
| Frequency Range             | Hz | 0 to 2000                           | 20 to 200000                           | 0 to 300000  | 0 to 300000  |
| Typical Working Distances   | mm | 2                                   | 0.5                                    | 15 to 700  | 2 to 50  |
| Operating Temperature Range | °C | -150 to +250                        | up to +250                             | -10 to +50   | -60 to +130 (Fiber)                                  |
|                             | °F | -238 to +482                        | up to +482                             | +14 to +122  | -76 to +266  |
| Dimensions                  | mm | 21 × 29.5                           | 21 × 29.5                              | 22.5 × 91  | 6 × 21 (Fiber tip)                                   |
| Connector                   |    | 10-32 UNF                           | 11.7 mm<br>60 UNS (1/2" microphone)    | SMB  | SMB  |
| Mounting Provision          |    | M16-1 thread with two included nuts | M16-1 thread with two included nuts    | 1/4"-20 UNC (camera tripod), 10-32 UNF, M4, M22-1 thread with flange | M6-0.75 thread with two included nuts                |

\* Type 2981-A consists of CCLD Laser Tacho Probe Type 2981, Fibre Adaptor UA-2144 and Optional Fibre AE-4003-D-020

Designed for contact-free speed measurements on rotating or reciprocating machine parts, Type 2981 produces a voltage pulse for each rotation of a shaft or cycle of a machine part.

Used with retroreflective tape like its included QS-0056, the probe has the advantage that it can be located any distance from 1.5 to at least 70 cm (0.6 to 27 inches) from the test object, thus safely separating the probe from possible contact with moving parts or an otherwise hazardous environment.

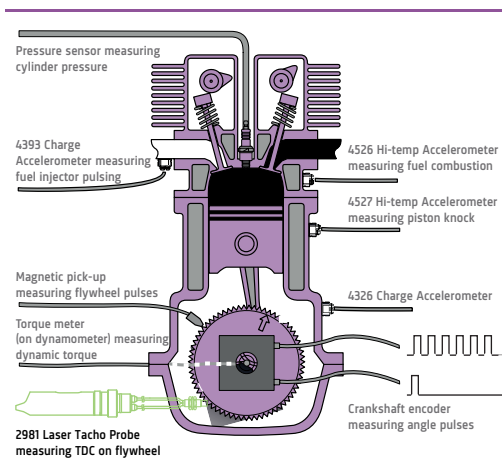

# FORCE TRANSDUCERS AND IMPACT HAMMERS

Piezoelectric force transducers are designed to measure dynamic, short-duration forces in constructions. They are mounted so that the force to be measured is transmitted through the transducer. Used together with vibration or modal exciters they can measure and control the applied force, and can be used for the measurement of frequency response functions in conjunction with an accelerometer. All Brüel & Kjær force transducers are of rugged construction, with high overall stiffness ensuring that they have a high resonance frequency without changing the mechanical characteristics of the test structure.

A convenient and economical means of exciting structures is an instrumented impact hammer fitted with a high-quality piezoelectric force transducer. Brüel & Kjær offers a complete range of instrumented impact hammers, capable of impacting and accurately measuring the force entering the structure under test.

## Force Transducers

These transducers are designed specifically for use with vibration and modal exciters in structural dynamic testing. Their very high

resonance frequency allows for the measurement of short duration, fast rise time, force transients.



| Type No.                               |                  | 8230-003  | 8230-002  | 8230-001  | 8230  | 8230-C-003  | 8231-C  |
|--|------------------|---|---|---|---|---|---|
| <b>Transducer Type</b>                 |                  | CCLD  | CCLD  | CCLD  | CCLD  | Piezoelectric   | Piezoelectric   |
| <b>Sensitivity</b>                     | mV/N<br>(mV/lbf) | 0.2<br>(1)  | 2.2<br>(10)   | 22<br>(100)   | 110<br>(500)  | -4<br>(-18)   | -2<br>(-9)  |
| <b>Range, Full Scale</b>               | N<br>(lbf)       | +22000/-22000<br>(+5000/-5000)  | +2200/-2200<br>(+500/-500)  | +220/-220<br>(+50/-50)  | +44/-44<br>(+10/-10)  | 22241 (5000)<br>Compression   | 111205 (25000)<br>Compression                         |
| <b>Maximum Compression</b>             | N<br>(lbf)       | +66000<br>(+15000)  | +44000<br>(+10000)  | +4400<br>(+1000)  | +880<br>(+200)  | +67000<br>(+15000)  | +268000<br>(+60000)                                   |
| <b>Maximum Tension</b>                 | N (lbf)          | -2200 (-500)  | -2200 (-500)  | -2200 (-500)  | -880 (-200)   | -2200 (-500)  | -4448 (-1000)   |
| <b>Weight</b>                          | gram             | 30  | 30  | 30  | 30  | 30  | 452   |
| <b>Operating Temperature Range</b>     | °C<br>°F         | -73 to +121<br>-99 to +250  | -73 to +121<br>-99 to +250  | -73 to +121<br>-99 to +250  | -73 to +121<br>-99 to +250  | -73 to +260<br>-99 to +500  | -73 to +260<br>-99 to +500                            |
| <b>Dimensions (Diameter × Height)</b>  | mm<br>(inch)     | 19.05 × 15.93<br>(0.75 × 0.627)   | 19.05 × 15.93<br>(0.75 × 0.627)   | 19.05 × 15.93<br>(0.75 × 0.627)   | 19.05 × 15.93<br>(0.75 × 0.627)   | 19.05 × 15.93<br>(0.75 × 0.627)   | 50.55 × 31.75<br>(1.99 × 1.25)                        |
| <b>Case Material</b>                   |                  | Stainless Steel   | Stainless Steel   | Stainless Steel   | Stainless Steel   | Stainless Steel   | Stainless Steel                                       |
| <b>Connector, Electrical</b>           |                  | 10-32 UNF   | 10-32 UNF   | 10-32 UNF   | 10-32 UNF   | 10-32 UNF   | 10-32 UNF   |
| <b>Mounting Provision</b>              |                  | Top & Bottom:<br>1/4"-28 UNF  | Top & Bottom:<br>1/4"-28 UNF  | Top & Bottom:<br>1/4"-28 UNF  | Top & Bottom:<br>1/4"-28 UNF  | Top & Bottom:<br>1/4"-28 UNF  | 3/8"-16   |
| <b>Cables and Accessories Included</b> |                  | Impact Cap,<br>1/4"-28 UNF<br>Mounting Stud,<br>and 1/4"-28 UNF<br>to 10-32 UNF<br>Insert | Impact Cap,<br>1/4"-28 UNF<br>Mounting Stud,<br>and 1/4"-28 UNF<br>to 10-32 UNF<br>Insert | Impact Cap,<br>1/4"-28 UNF<br>Mounting Stud,<br>and 1/4"-28 UNF<br>to 10-32 UNF<br>Insert | Impact Cap,<br>1/4"-28 UNF<br>Mounting Stud,<br>and 1/4"-28 UNF<br>to 10-32 UNF<br>Insert | Impact Cap,<br>1/4"-28 UNF<br>Mounting Stud,<br>and 1/4"-28 UNF<br>to 10-32 UNF<br>Insert | Impact Cap and<br>2 × 3/8"-16<br>UNC Mounting<br>Stud |

# Force Transducer/Impact Hammer Impedance Heads

Force Transducer/Impact Hammer Type 8203 is a unique structural testing kit designed for use with lightweight and delicate structures. The force transducer measures the force applied to the structure. It can be connected to the hammer kit for impact testing or to a small exciter (such as Brüel & Kjær Type 4810) via the stinger kit provided.



| Type No.                                    | 8203*  |  |
|---|--|--|
| <b>Transducer Type</b>                      | Piezoelectric  |  |
| <b>Sensitivity</b>                          | pC/N<br>(pC/lbf)   | 3.6<br>(16)  |
| <b>Maximum Compression</b>                  | N (lbf)  | 1000 (225) <sup>†</sup><br>1250 (281) <sup>‡</sup>     |
| <b>Maximum Tension</b>                      | N<br>(lbf)   | 250<br>(56)  |
| <b>Resonance Frequency with 5 gram Load</b> | kHz  | 21 <sup>†</sup><br>30 <sup>‡</sup>                     |
| <b>Head Mass</b>                            | g (lb)   | 3.5 (0.0077) <sup>†</sup><br>1.9 (0.0042) <sup>‡</sup> |
| <b>Weight</b>                               | g (lb)   | 3.2 (0.0071) <sup>†</sup><br>1.6 (0.0035) <sup>‡</sup> |
| <b>Operating Temperature Range</b>          | °C<br>°F   | -196 to +150<br>-321 to +302                           |
| <b>Overall Length</b>                       | mm<br>(inch)   | 106<br>(4.17)  |
| <b>Dimensions (diameter × height)</b>       | mm<br>(inch)   | 9 × 15.8<br>(0.35 × 0.62)                              |
| <b>Handle Material</b>                      | Anodized Aluminium   |  |
| <b>Case Material</b>                        | Titanium & Steel AISI 303  |  |
| <b>Connector</b>                            | Coaxial M3   |  |
| <b>Mounting Provision</b>                   | Top & Bottom:<br>M3 (with pre-loading nuts)  |  |
| <b>Included Cables and Accessories</b>      | <ul style="list-style-type: none"> <li>• AO-0339 Cable</li> <li>• DB-3041 Steel Tip</li> <li>• UC-0205 Plastic Tip</li> <li>• YS-9202 Tip Mounting Screw</li> <li>• UC-5322 Pre-loading Nut</li> <li>• YM-0249 Pre-loading Nut</li> <li>• DB-425 M3/10–32 UNF Adaptor</li> <li>• YQ-2004 M3 Screw for DB-1425</li> <li>• QA-0041 Tap for M3 Thread</li> <li>• QA-0186 5 mm Spanner</li> <li>• QA-0042 Allen Key</li> <li>• Complete Stinger Accessory Kit</li> </ul> |  |

\* Force transducer can be removed to use separately  
<sup>†</sup> With pre-loading nuts  
<sup>‡</sup> Without pre-loading nuts

Impedance heads offer a simple approach to the measurement of point mechanical mobilities and impedances. They can be used on a wide range of structures, including rotor blades, polymers, the human body, artificial mastoids, welds, wood and metal panels.



| Type No.                               | 8001  |                              |
|--|---|------------------------------|
| <b>Transducer Type</b>                 | Piezoelectric   |                              |
| <b>Sensitivity, Force Gauge</b>        | pC/N<br>(pC/lbf)  | 370<br>(1645)                |
| <b>Sensitivity, Accelerometer</b>      | pC/ms <sup>-2</sup><br>(pC/g)   | 3<br>(30)                    |
| <b>Maximum Compression</b>             | N<br>(lbf)  | 2000<br>(449.6)              |
| <b>Maximum Tension</b>                 | N<br>(lbf)  | 300<br>(67.4)                |
| <b>Frequency Range (±10%)</b>          | kHz   | 0.001 to 10                  |
| <b>Weight</b>                          | g<br>(lb)   | 29<br>(0.064)                |
| <b>Operating Temperature Range</b>     | °C<br>°F  | -196 to +260<br>-321 to +500 |
| <b>Dimensions (diameter × height)</b>  | mm<br>(inch)  | 18 × 32<br>(0.71 × 1.26)     |
| <b>Case Material</b>                   | Titanium  |                              |
| <b>Connector</b>                       | Two 10–32 UNF   |                              |
| <b>Mounting Provision</b>              | Top & Bottom:<br>10–32 UNF  |                              |
| <b>Included Cables and Accessories</b> | <ul style="list-style-type: none"> <li>• 2 × AO-0038 Low-noise cable, 1.2 m (4 ft)</li> <li>• 4 × YQ-2962 Threaded Steel Stud, 10–32 UNF</li> <li>• 3 × YO-0534 Mica Washer</li> <li>• 2 × YP-0150 Insulated Stud, 10–32 UNF</li> <li>• YM-0414 Nut, 10–32 UNF</li> <li>• QA-0029 Screw Tap, 10–32 UNF</li> <li>• QA-0013 Allen Key, 3/32" for studs</li> <li>• 5 × YS-0514 Weakened Stud, 10–32 UNF</li> </ul> |                              |

# Impact Hammers

Impact hammer measurements are often conducted in difficult environments where dust, temperature fluctuations and high humidity frequently pose severe demands on the electrical and mechanical integrity of the instrumentation. All Brüel & Kjær impact hammers have been meticulously designed to meet the

expectations for reliability in all such environments. With the ability to excite from the smallest of structures to various civil engineering structures, Brüel & Kjær has an impact hammer to suit even the most demanding application.



| Type No.                               |                  | 8204                                     | 8206-003                             | 8206-002                             | 8206-001                             | 8206                                 | 8207                                 | 8208                                 | 8210                                 |
|--|------------------|--|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| <b>Transducer Type</b>                 |                  | CCLD                                     | CCLD                                 | CCLD                                 | CCLD                                 | CCLD                                 | CCLD                                 | CCLD                                 | CCLD                                 |
| <b>Sensitivity</b>                     | mV/N<br>(mV/lbf) | 22.5<br>(100)                            | 1.12<br>(5)                          | 2.25<br>(10)                         | 11.2<br>(50)                         | 22.5<br>(100)                        | 0.225<br>(1)                         | 0.225<br>(1)                         | 0.225<br>(1)                         |
| <b>Range, full scale</b>               | N (lbf)          | 222 (50)                                 | 4448 (1000)                          | 2224 (500)                           | 445 (100)                            | 222 (50)                             | 22240<br>(5000)                      | 22240<br>(5000)                      | 22240<br>(5000)                      |
| <b>Maximum Force</b>                   | N (lbf)          | 890 (200)                                | 8896 (2000)                          | 4448 (1000)                          | 4448 (1000)                          | 4448 (1000)                          | 35584<br>(8000)                      | 35584<br>(8000)                      | 35584<br>(8000)                      |
| <b>Upper Frequency Limit, typical*</b> | kHz              | 60                                       | 10                                   | 10                                   | 10                                   | 10                                   | 1.2                                  | 1.2                                  | 1.2                                  |
| <b>Head Mass</b>                       | g (lb)           | 2 (0.0044)                               | 100 (0.22)                           | 100 (0.22)                           | 100 (0.22)                           | 100 (0.22)                           | 454 (1.0)                            | 1362 (3.0)                           | 5448 (12)                            |
| <b>Operating Temperature Range</b>     | °C               | -73 to<br>+60                            | -55 to<br>+125                       | -55 to<br>+125                       | -55 to<br>+125                       | -55 to<br>+125                       | -73 to<br>+121                       | -73 to<br>+121                       | -73 to<br>+121                       |
|  | °F               | -100 to<br>+140                          | -100 to<br>+250                      | -100 to<br>+250                      | -100 to<br>+250                      | -100 to<br>+250                      | -100 to<br>+250                      | -100 to<br>+250                      | -100 to<br>+250                      |
| <b>Overall Length</b>                  | mm (inch)        | 122 (4.8)                                | 223 (8.76)                           | 223 (8.76)                           | 223 (8.76)                           | 223 (8.76)                           | 300 (11.7)                           | 390 (15.2)                           | 900 (35.3)                           |
| <b>Handle Material</b>                 |                  | Poly<br>Extension                        | Fibreglass<br>with<br>Rubber Grip    | Fibreglass<br>with<br>Rubber Grip    | Fibreglass<br>with<br>Rubber Grip    | Fibreglass<br>with<br>Rubber Grip    | Hardwood                             | Hardwood                             | Hardwood                             |
| <b>Case Material</b>                   |                  | Stainless<br>Steel                       | Stainless<br>Steel                   | Stainless<br>Steel                   | Stainless<br>Steel                   | Stainless<br>Steel                   | Stainless<br>Steel                   | Stainless<br>Steel                   | Stainless<br>Steel                   |
| <b>Connector</b>                       |                  | 10-32 UNF                                | BNC                                  | BNC                                  | BNC                                  | BNC                                  | BNC                                  | BNC                                  | BNC                                  |
| <b>Accessories Included</b>            |                  | Head<br>Extender and<br>Carrying<br>Case | Various Tips<br>and Carrying<br>Case | Various Tips<br>and Carrying<br>Case | Various Tips<br>and Carrying<br>Case | Various Tips<br>and Carrying<br>Case | Various Tips<br>and Carrying<br>Case | Various Tips<br>and Carrying<br>Case | Various Tips<br>and Carrying<br>Case |

\* Upper frequency limit depends upon structure under test and tip used. Typical values stated above are for a steel tip

# MODAL AND VIBRATION EXCITERS

## Modal and Vibration Test Solutions from Brüel & Kjær

Brüel & Kjær offers, as a single-source supplier, a wide range of tools for measurement and analysis in the vibration and structural dynamics testing disciplines including: multichannel data acquisition hardware, measurement software, post-processing software and software for integration of test and finite element analysis.

### Modal Exciters

Based upon years of practical modal test experience, the line of modal exciters has been specifically developed to ensure the best possible modal test performance with minimum setup time.

The electrodynamic exciters provide precise, reliable, stable and long-lasting operation. Highest quality materials, stringent quality control and rugged construction assure a versatile means of modal excitation for any modal test.

Features include through-hole design, high force-to-weight ratio, low-mass armatures, wide frequency range, low total weight and small physical dimensions.

The family of exciters available through Brüel & Kjær range from small permanent magnet exciters for vibrating small test objects to larger floor-mounted types for vibrating assemblies and larger structures. They are designed for high force levels and produce a clean vibration waveform with low cross-motion and distortion.

The exciters are available as:

- **Stand-alone units** supplied only with the appropriate trunnion, blower (except Type 4824) and connecting cable
- **Complete systems** with a matching power amplifier and DC static centring and field power supply units (Types 3627 and 3628 only)

Optional accessories include traditional push/pull stingers, tension wire stingers, lateral modal exciter stands, turnbuckles, hose and cable extension kits, chuck nut assemblies and various adaptors.

Note: The table shows selected modal exciters only. Exciters above 1000 N are available.



| Type No. for Stand-alone Product |                      | 4824                                  | 4825                                  | 4826                                  | 4827                                    | 4828                                    |
|----------------------------------|----------------------|---------------------------------------|---------------------------------------|---------------------------------------|---|---|
| Type No. for System              |                      | 3624                                  | 3625                                  | 3626                                  | 3627                                    | 3628                                    |
| Max. Force*, Sine (peak)         | N (lbf)              | 100 (22)                              | 200 (45)                              | 400 (90)                              | 650 (146)                               | 1000 (225)                              |
| Max. Force*, Random (RMS)        | N (lbf)              | 70 (15)                               | 140 (31)                              | 280 (63)                              | 420 (94)                                | 650 (146)                               |
| Max. Displacement, Pk-Pk         | mm (in)              | 25.4 (1)                              | 25.4 (1)                              | 25.4 (1)                              | 50.8 (2)                                | 50.8 (2)                                |
| Effective Moving Mass            | kg (lb)              | 0.23 (0.51)                           | 0.23 (0.51)                           | 0.40 (0.88)                           | 1.3 (2.87)                              | 1.3 (2.87)                              |
| Main Resonance Frequency         | Hz                   | >6000                                 | >6000                                 | >4000                                 | >3000                                   | >3000                                   |
| Useful Frequency Range           | Hz                   | 2 to 5000                             | 2 to 5000                             | 2 to 5000                             | 2 to 5000                               | 2 to 5000                               |
| Operating Frequency Range        | Hz                   | DC to 5000                            | DC to 5000                            | DC to 5000                            | DC to 5000                              | DC to 5000                              |
| Max. Velocity, Sine (peak)       | m/s<br>(in/s)        | 1.5 (59)                              | 1.5 (59)                              | 1.5 (59)                              | 1.5 (59)                                | 1.5 (59)                                |
| Max. Velocity, Random (RMS)      | m/s<br>(in/s)        | 1.5 (59)                              | 1.5 (59)                              | 1.5 (59)                              | 1.5 (59)                                | 1.5 (59)                                |
| Max. Acceleration, Sine (peak)   | m/s <sup>2</sup> (g) | 432 (44)                              | 863 (88)                              | 981 (100)                             | 500 (51)                                | 765 (78)                                |
| Max. Acceleration, Random (RMS)  | m/s <sup>2</sup> (g) | 304 (31)                              | 608 (62)                              | 697 (71)                              | 343 (35)                                | 490 (50)                                |
| Rated Current                    | A                    | 5.5                                   | 11.2                                  | 18                                    | 18                                      | 18                                      |
| Suspension Stiffness             | N/mm<br>(lbf/in)     | 4 (23)                                | 4 (23)                                | 4 (23)                                | Adjustable <sup>†</sup>                 |   |
| Weight with Trunnion             | kg (lb)              | 21 (46.3)                             | 21 (46.3)                             | 21 (46.3)                             | 80 (176)                                | 80 (176)                                |
| Dimensions with Trunnion         | mm (in)              | 306 × 220 × 241.5<br>(12 × 8.7 × 9.5) | 306 × 220 × 241.5<br>(12 × 8.7 × 9.5) | 306 × 220 × 241.5<br>(12 × 8.7 × 9.5) | 394 × 400 × 540<br>(15.5 × 15.7 × 21.3) | 394 × 400 × 540<br>(15.5 × 15.7 × 21.3) |

\* With forced air cooling

† Adjusted with DC Static Centring Unit Type 1056





|                           |  |
|---------------------------|--|
| <b>Type No.</b>           | <b>5961</b>  |
|                           | <b>Hand-held Exciter</b>   |
| <b>Description</b>        | Combines the advantages of an impact hammer and modal exciter for measuring on smaller structures. Has a built-in battery-operated power amplifier. Needs only to be fed with an input signal from an external generator such as via a PULSE multi-analyzer system |
| <b>Frequency Range</b>    | 45 Hz to 15 Hz   |
| <b>Sensitivity</b>        | 150 mN/V <sub>in</sub> (typical and broadband)<br>where V <sub>in</sub> = 2.0 V RMS, Load mass = 2 kg  |
| <b>Force Rating (RMS)</b> | 2 N (typical at resonance)<br>100 mN (typical at 10 kHz)   |
| <b>Input Voltage</b>      | 2.0 V RMS (distortion <3%)<br>3.5 V RMS (max. input)   |
| <b>Battery Lifetime</b>   | Approx. 3 hours constant use   |
| <b>Weight</b>             | 500 g (17 oz), incl. battery   |
| <b>Dimensions</b>         | Length: 155 mm (6.1")<br>Diameter: 52 mm (2.05")   |

## Vibration Exciters

All permanent magnet exciters are versatile and can be used for a range of applications including general vibration testing, mechanical impedance and mobility measurements, modal analysis or accelerometer calibration.

Matching power amplifiers and a range of accessories are available.

For more information on the use of vibration exciters to calibrate accelerometers, see [Accelerometer Calibration](#).



| Type No.  |                      | <b>4808</b>  | <b>4809</b>                             | <b>4810</b>   |
|---|----------------------|--|---|---|
| <b>Max. Force, Sine (peak) (without cooling)</b>  | N (lbf)              | 112 (25)   | 44.5 (10)                               | 10 (2.25) @ 65 Hz to 4 kHz<br>7 (1.5) @ 65 Hz to 18 kHz |
| <b>Max. Force, Sine (peak) (with air cooling)</b> | N (lbf)              | 187 (42)   | 60 (13.5)                               | –   |
| <b>Max. Displacement, Pk-Pk</b>                   | mm (in)              | 12.7 (0.5)   | 8.0 (0.32)                              | 4.0 (0.16)  |
| <b>Effective Moving Mass</b>                      | kg (lb)              | 160 (5.64)   | –                                       | 18 (0.63)   |
| <b>Frequency Range</b>                            | Hz                   | 5 to 10000   | 10 to 20000                             | DC to 18000   |
| <b>Max. Bare Table Acceleration (peak)</b>        | m/s <sup>2</sup> (g) | 700 (71)   | 736 (75)<br>1000 (100) with air cooling | 550 (56) @ 65 Hz to 4 kHz<br>383 (39) @ 65 Hz to 18 kHz |
| <b>Coil Impedance</b>                             | Ω                    | Approx. 0.8 @ 500 Hz with bare table and coils in parallel |   | Approx. 2 @ 500 Hz with bare table<br>3.5 @ 500 Hz      |
| <b>Max. Input Current</b>                         | A RMS                | 15<br>(25 with assisted air cooling)                       | 5<br>(7 with forced air cooling)        | 1.8   |
| <b>Weight</b>                                     | kg (lb)              | 35 (77.1)  | 8.3 (18.3)                              | 1.1 (2.4)   |
| <b>Dimensions:</b>                                |                      |  |   |   |
| Diameter  | mm (in)              | 215 (8.46)   | 149 (5.87)                              | 76 (3)  |
| Height  |                      | 200 (7.87)   | 143 (5.63)                              | 75 (2.9)  |
| <b>Table Diameter</b>                             | mm (in)              | 62.5 (2.45)  | 29 (1.14)                               | 14 (0.55)   |
| <b>Power Amplifier</b>                            |                      | Type 2719  | Type 2718                               | Type 2718   |

# ACCELEROMETER ACCESSORIES

## Clip Mounting

For modal and other applications requiring easy, flexible, and fast mounting, Brüel & Kjær has specifically developed a line of mounting clips. The housing of some accelerometers has slots that allow the use of mounting clips. The clips are attached to the object with glue or double-sided adhesive tape and can be easily fitted and

moved to or from a number of different test objects. With glass reinforced polycarbonate clips, the upper frequency limit will be reduced depending on the accelerometer. For detailed mounting techniques and specifications, see the individual accelerometer product data sheets.

| Type No. | Description  | Used with   |
|----------|--|---|
| UA-1407  | Set of 100 small mounting clips  | Types 4507, 4508, 4524, 4500-A, 4501-A  |
| UA-1475  | Set of 100 small thick-base mounting clips                                       |   |
| UA-1564  | Set of 5 small high-temperature mounting clips, insulated with 10 – 32 UNF holes |   |
| UA-1478  | Set of 100 small swivel bases  |   |
| DV-0459  | Small calibration clip   |   |
| UA-1408  | Set of 100 big mounting clips  | Types 4504, 4506, 4326-A, 4326-A-001, 4573, 4574, 4575, 4535, 4528, 4527 with adaptor UA-2219 |
| UA-1474  | Set of 100 big thick-base mounting clips   |   |
| UA-1563  | Set of 5 big high-temperature mounting clips, insulated with 10 –32 UNF holes    |   |
| UA-1473  | Set of 100 big swivel bases  |   |
| DV-0460  | Big calibration clip   |   |
| UA-1480  | Spirit level for swivel base   | All swivel bases  |



| Item No.                              | UA-1408   | UA-1474   | UA-1473   |
|---------------------------------------|---|---|---|
| <b>Description</b>                    | Large clip for mounting directly on object surface                                | Large clip with thick base that can be filed down to suit your mounting surface | Large clip with swivel base   |
| <b>Weight</b>                         | 3.9 g (0.13 oz)   | 3.9 g (0.13 oz)   | 5 g (0.18 oz)   |
| <b>Temperature Range</b>              | –54 to +50 °C (–65 to +122 °F)<br>For brief use (<1 hour): up to +80 °C (+176 °F) |   |   |
| <b>Maximum Acceleration</b>           | 10 g peak<br>Perpendicular to mounting surface: 70 g peak                         |   |   |
| <b>Material</b>                       | Glass reinforced polycarbonate  |   |   |
| <b>Upper Limiting Frequency, 10%:</b> | <b>with Type 4506</b>   | Mounted with grease on the accelerometer: 2 kHz<br>Mounted dry: 1.2 kHz         | Mounted with grease on the accelerometer: 2 kHz   |
|                                       | <b>with Type 4506-B</b>   |   | Mounted with grease: Excited along one of the accelerometer's axes of sensitivity and with mounting surface of hemisphere at 45° to excitation direction: 1 kHz |
|                                       | <b>with Type 4506-B-003</b>   | Mounted with grease: 1.2 kHz  | Mounted with grease: 1.2 kHz  |



| Item No.                             | UA-1407   | UA-1475  | UA-1478  |
|--------------------------------------|---|--|--|
| <b>Description</b>                   | Small clips for mounting directly on object surface                               | Small clips with thick base that can be filed down to suit your mounting surface | Small clips with a swivel base   |
| <b>Weight</b>                        | 0.4 g (0.014 oz)  | 0.7 g (0.02 oz)  | 0.8 g (0.03 oz)  |
| <b>Temperature Range</b>             | -54 to +50 °C (-65 to +122 °F)<br>For brief use (<1 hour): up to +80 °C (+176 °F) |  |  |
| <b>Maximum Acceleration</b>          | 10 g peak<br>Perpendicular to mounting surface: 70 g peak                         |  |  |
| <b>Material</b>                      | Glass reinforced polycarbonate  |  |  |
| <b>Upper Limiting Frequency, 10%</b> | <b>with Type 4507</b>   | Mounted with grease: 3 kHz<br>Mounted dry: 1.5 kHz                               | Mounted with grease: 3 kHz<br>Mounted dry: 1.5 kHz   |
|                                      | <b>with Type 4508</b>   | Mounted with grease: 4 kHz<br>Mounted dry: 2 kHz                                 | Mounted with grease: 3 kHz<br>Mounted dry: 1.5 kHz   |
|                                      | <b>with Type 4524</b>   | Mounted with grease:<br>X: 2.7 kHz, Y and Z: 2.0 kHz                             | Mounted with grease:<br>X: 2.7 kHz, Y and Z: 2.0 kHz   |
|                                      |   |  | Mounted with grease: Excited along one of the accelerometer's axes of sensitivity and with mounting surface of hemisphere at 45° to excitation direction: 2.3 kHz                      |
|                                      |   |  | Mounted with grease: Excited along one of the accelerometer's axes of sensitivity and with mounting surface of hemisphere at 45° to excitation direction: 1.7 kHz                      |
|                                      |   |  | Mounted with grease: Excited along one of the accelerometer's axes of sensitivity and with mounting surface of hemisphere at 45° to excitation direction: X: 2.5 kHz, Y and Z: 1.9 kHz |



| Item No.  | UA-1564   | UA-1563   |
|---|---|---|
| <b>Description</b>                                    | High-temperature mounting clips   |   |
| <b>Temperature Range</b>                              | -55 to +175 °C (-67 to +347 °F)<br>If discolouring is acceptable: up to +250 °C (+482 °F) |   |
| <b>Maximum Acceleration</b><br>(5 gram accelerometer) | 50 g peak<br>Perpendicular to mounting surface: 250 g peak                                | 10 g peak<br>Perpendicular to mounting surface: 50 g peak |
| <b>Material</b>                                       | Anodized aluminium  |   |
| <b>Base Spring</b>                                    | Stainless steel spring  |   |
| <b>Weight</b>   | 5.7 g (0.20 oz)   | 11 g (0.38 oz)  |
| <b>Mounting Thread</b>                                | 10-32 UNF   |   |



| Item No.                         | DV-0459   | DV-0460                  |
|----------------------------------|---|--------------------------|
| <b>Description</b>               | Calibration clip for mounting accelerometers during calibration |                          |
| <b>Mounting Surface Diameter</b> | 21 mm (0.83")   | 29 mm (1.14")            |
| <b>Mounting Thread</b>           | 10-32 UNF   | 10-32 UNF                |
| <b>Weight</b>                    | 17 g (0.59 oz)  | 44 g (1.55 oz)           |
| <b>Base Material</b>             | Hardened stainless steel  | Hardened stainless steel |
| <b>Spring Material</b>           | Stainless steel   | Stainless steel          |



|                    |                                |                |
|--------------------|--------------------------------|----------------|
| <b>Item No.</b>    | <b>UA-1417</b>                 | <b>UA-1418</b> |
| <b>Description</b> | Set of 25 dummy accelerometers |                |
| <b>Used with</b>   | Big clips                      | Small clips    |



|  |   |
|--|---|
| <b>Item No.</b>  | <b>UA-2219</b>  |
| <b>Description</b>   | Adaptor for clip mounting of accelerometers (25 pcs)<br>For use with mounting clips UA-1407, UA-1475, UA-1478, UA-1564 and DV-0459  |
| <b>Material</b>  | Black anodized aluminium  |
| <b>Weight</b>  | 0.4 g (0.014 oz)  |
| <b>Mounting Surface</b>  | 10 × 10 mm (0.39 × 0.39")   |
| <b>Mounting Provision</b>  | M3 × 15 mm stud, Adhesive   |
| <b>Upper Limiting Frequency, 10% (using mounting clip UA-1407)</b> | with Accelerometer Type 4393 stud-mounted: 2 kHz<br>with Accelerometer Type 4533 or 4534 adhesive-mounted: 3 kHz<br>with Accelerometer Type 4527, 4528 or 4535 stud/adhesive-mounted: 1 kHz |



|                           |   |
|---------------------------|---|
| <b>Item No.</b>           | <b>UA-1480</b>  |
| <b>Description</b>        | Spirit level for swivel bases<br>To align accelerometers in order to retain coordinate system |
| <b>Maximum Dimensions</b> | 85 × 23 × 17 mm<br>(3.3 × 0.9 × 0.6")   |
| <b>Material</b>           | Black anodized aluminium  |



Example of an accelerometer mounted on Calibration Exciter Type 4294 using a calibration clip



# Mounting Blocks, Brackets and Adaptors

For specific applications, such as hand-arm and whole body vibration, or with relation to specific designs, Brüel & Kjær offers a range of blocks and brackets developed with customers to ease mounting or dismounting and obtain the best possible

measurement results. The products shown are just some of the solutions developed over the years. So if your need is not addressed please ask our sales personnel for other available options.



| Item No.                  | UA-2083  | UA-2079  | UA-3014   |
|---------------------------|--|--|---|
| <b>Description</b>        | Adaptor for clip mounting of DC Response Accelerometers (Type 4571 – 4575)<br>Includes 5 thin mounting clips | Triaxial Mounting Block for DC Response Accelerometers (Type 4571 – 4575)<br>The adaptor includes a 10–32 UNF mounting stud and 4–40 UNC screws (25 pcs) | High-temperature mounting block (cooling unit)<br>This water-cooled unit is specifically designed for use on high-temperature surfaces up to 600 °C (1112 °F), such as exhaust manifold including lambda probe position.<br>Compatible with: Type 4326-A-001 and can be used at reduced temperatures with Types 4505-A and 4326-A |
| <b>Material</b>           | Black anodized aluminium   | Clear anodized aluminium   | Stainless steel, AISI 304   |
| <b>Mounting Surface</b>   | 26 × 15 mm (1 × 0.5")  | 26 × 26 mm (1 × 1")  | The cooling water is suspended above the unit and led through the hose by gravity (pumps or similar vibration generating devices are not recommended)   |
| <b>Mounting Provision</b> | Tapped Holes: 2 × 4–40 UNC   | 10–32 UNF stud, 6–32 UNF, M4 screw, Adhesive   | 1 m hoses (5.5 mm (0.2") outer Ø) (2 pcs)<br>M2 × 10 screws (6 pcs)   |

Mounting an accelerometer using UA-2083



Mounting an accelerometer using UA-2079



Mounting an accelerometer using UA-3014



# Blocks and Brackets for Human Vibration



These accessories are specifically designed to enable mounting of a transducer for quick and easy hand-arm and/or whole body vibration analysis.



Using UA-3015



Using Type 4447



Using UA-3016



Using UA-3017

|                    |   |   |
|--------------------|---|---|
| <b>Item No.</b>    | <b>Type 4392</b>  | <b>Type 4447</b>  |
| <b>Description</b> | <p><b>Hand-arm Transducer Set</b><br/>The Hand-arm Transducer Set includes hand and handle adaptors designed for the included accelerometer Type 4374. The accelerometer has a very wide frequency and dynamic range enabling both low level vibration and/or high percussive vibration</p> | <p><b>Human Vibration Analyzer</b><br/>A complete portable system for acquisition, measurement and evaluation of human vibration and comfort, and includes a range of adaptors for sensor mounting and appropriate accelerometers</p>   |
| <b>Uses</b>        | Hand-arm vibration measurements (2 to 1250 Hz)  | <ul style="list-style-type: none"> <li>Hand-arm vibration measurements (2 to 1250 Hz)</li> <li>Whole-body vibration measurements (1 to 80 Hz)</li> <li>Low-frequency, whole-body vibration measurements down to 0.4 Hz</li> <li>Linear mode (0.4 to 1250 Hz) for calibration</li> </ul> |
| <b>Standards</b>   | ISO 5349  | <ul style="list-style-type: none"> <li>ISO 8041.2005 Technical specification</li> <li>ISO 5349.2: 2001 Hand-arm</li> <li>ISO 2631.1: 1997 Whole-body</li> <li>EN 1032.2003: Mechanical vibration</li> <li>EU Directive 2002/44/EC</li> </ul>  |



|                        |   |   |  |
|------------------------|---|---|--|
| <b>Item No.</b>        | <b>UA-3015</b>  | <b>UA-3016</b>  | <b>UA-3017</b>   |
| <b>Description</b>     | <p><b>Hand Adaptor (T-shaped)</b><br/>The hand adaptor is designed to be hand fixed between two fingers and the grip surface. Mounting and dismantling are easily done by using the clip principle.</p> | <p><b>Handle Adaptor (L-shaped)</b><br/>The handle adaptor is placed on a tool grip/handle and accommodates accelerometers for clip mounting. The handle adaptor is specifically recommended for percussive tools with high g-levels.</p> | <p><b>Direct Mounting Adaptor</b><br/>This block features accelerometer clip mounting and is fastened to the test object by use of strips. This makes for very versatile mounting options, including steering wheels, handles, pipes, etc.</p> |
| <b>Compatible with</b> | Types 4520-002, 4524-B, 4507-B-001 and 4508-B-001   | Types 4520-002, 4524-B, 4507-B-001 and 4508-B-001   | Types 4520-002, 4524-B, 4507-B-001 and 4508-B-001  |
| <b>Performance</b>     | Useful Frequency Range: 0 to >5000 Hz<br>Max. Acceleration: 2500 m/s <sup>2</sup> (~25 g)   | Useful Frequency Range: 0 to >5000 Hz<br>Max. Acceleration: 2500 m/s <sup>2</sup> (~250 g)  | Useful Frequency Range: 0 to >5000 Hz<br>Max. Acceleration: 2500 m/s <sup>2</sup> (~250 g)   |
| <b>Standards</b>       | ISO 8041, ISO 5349  | ISO 8041, ISO 5349  | ISO 8041, ISO 5349   |
| <b>Material</b>        | Anodized aluminium  | Anodized aluminium  | Anodized aluminium   |
| <b>Weight</b>          | 15 g (0.5 oz)   | 30 g (1 oz)   | 12 g (0.4 oz)  |

## Other Accessories

### Studs

| Thread      | Item No. | Description  |
|-------------|----------|--|
| 10–32 UNF   | UA-2063  | Set of 10 pieces, fully threaded 10–32 UNF steel stud, length 7.9 mm (0.31"); see Fig. 1                   |
|             | UA-2064  | Set of 10 pieces, double end threaded 10–32 UNF steel stud, with flange, length 5.3 mm (0.21"); see Fig. 2 |
| 1/4"–28 UNF | UA-2068  | Set of 10 pieces, fully threaded 1/4–28 UNF, length 9.7 mm (0.38"); see Fig. 3                             |
|             | UA-2056  | Set of 10 pieces, fully threaded 1/4–28 UNF with flange, length 8.7 mm (0.34"); see Fig. 4                 |
| 3/8"–16 UNF | UA-2061  | Set of 10 pieces, fully threaded 3/8–16 UNF, length 12.7 mm (0.5"); see Fig. 5                             |
| M3          | UA-2065  | Set of 10 pieces, fully threaded M3 steel studs, length 5.0 mm (0.2"); see Fig. 6                          |
|             | UA-1221  | Set of 10 pieces, double end threaded M3 steel studs, with flange, length 3.5 mm (0.13"); see Fig. 7       |

### Insulated Studs

| Thread    | Item No. | Description  |
|-----------|----------|--|
| 10–32 UNF | YP-0150  | Insulated fully threaded stud, length 13 mm (0.5"); see Fig. 8   |
| 10–32 UNF | UA-1192  | Set of 10 insulated studs, double-end threaded with flange, length 10 mm (0.4"), 200 °C (392 °F); see Fig. 9   |
| 10–32 UNF | UA-1444  | Set of 10 insulated studs, thread with flange, length 2.1 mm (0.08"); 120 °C/248 °F see Fig. 10                |
| M3        | UA-1193  | Set of 10 insulated studs, double-end threaded with flange, length 5.4 mm (0.2"), 200 °C (392 °F); see Fig. 11 |

### Cement Studs

| Thread    | Item No. | Description  |
|-----------|----------|--|
| 10–32 UNF | UA-0866  | Set of 25 cement studs with flange; $\varnothing$ 14 mm (0.55"); see Fig. 12 |
| M3        | UA-0867  | Set of 25 studs with flange; $\varnothing$ 8 mm (0.3"); see Fig. 13          |

### Mechanical Filters

| Thread              | Item No. | Description  |
|---------------------|----------|--|
| 10–32 UNF stud/hole | UA-0553  | Set of 5 mechanical filters<br><br>Temperature range:<br>–50 to +100 °C (– 58 to +212 °F)<br><br>Material: Stainless steel AISI 303, Butyl rubber<br>See Fig. 14 |
| M3 stud/hole        | WA-0224  | Mechanical filter; see Fig. 15   |

### Magnets

| Thread                   | Item No. | Description  |
|--------------------------|----------|--|
| 10–32 UNF                | UA-0643  | Set of 5 mounting magnets, $\varnothing$ 24 mm (0.9"), stud length 3.1 mm (0.1"). Each magnet comes with 2 insulating discs; see Fig. 16 |
| M3                       | UA-1075  | Set of 5 mounting magnets, $\varnothing$ 10 mm (0.3"), stud length 1.6 mm (0.06"). Each magnet comes with 1 insulating disc; see Fig. 17 |
| 1/4"–28 UNF to 10–32 UNF | UA-1281  | Mounting Magnet; see Fig. 18   |

### Adaptors

| Thread                   | Item No. | Description  |
|--------------------------|----------|--|
| 10–32 UNF to M3          | DB-1425  | Berylco adaptor, M3 internal threaded; see Fig. 19   |
| 10–32 UNF to 1/4"–28 UNF | UA-2062  | Set of 10 mounting studs with flange; see Fig. 20  |
|                          | UA-2052  | Set of 10 stud adaptors; see Fig. 21   |
|                          | UA-2054  | Set of 20 bushing adaptors; see Fig. 22  |
| 10–32 UNF to M6          | WA-1668  | Stainless steel adaptor, M6 internal threaded; see Fig. 23   |
| 10–32 UNF to M8          | WA-1667  | Stainless steel adaptor, M8 internal threaded; see Fig. 24   |
| 10–32 UNF to M10         | WA-1666  | Stainless steel adaptor, M10 internal threaded; see Fig. 25  |
| 10–32 UNF to M12         | WA-1665  | Stainless steel adaptor, M12 internal threaded; see Fig. 26  |
| Flat to M3               | UA-2219  | Anodized aluminium adaptor, used to mount M3 threaded accelerometers to mounting clip, see Fig. 27 |

**UA-2063**




Fig. 1

In mm

**UA-2064**

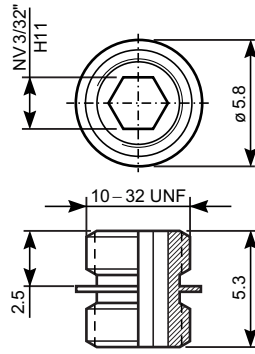


Fig. 2

In mm

**UA-2068**




Fig. 3

In mm

**UA-2056**




Fig. 4

In mm

**UA-2061**




Fig. 5

In mm

**UA-2065**




Fig. 6

In mm

**UA-1221**

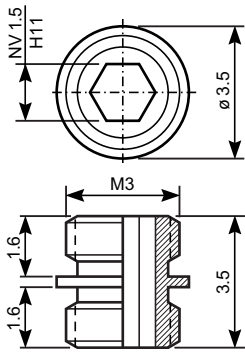


Fig. 7

In mm

**YP-0150**

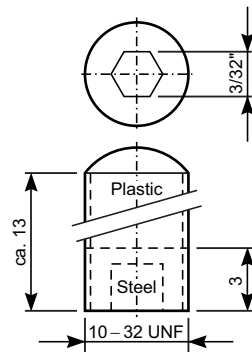


Fig. 8

In mm

**UA-1192**




Fig. 9

In mm



**UA-1444**

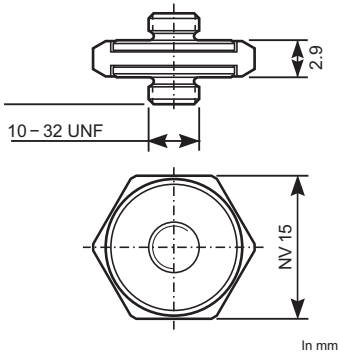


Fig. 10

In mm

**UA-1193**

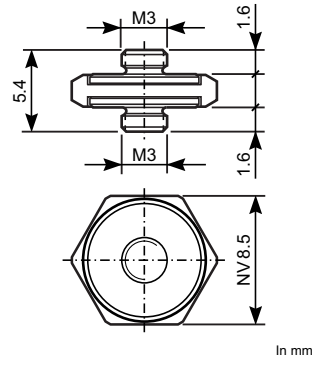


Fig. 11

In mm

**UA-0866**




Fig. 12

In mm

**UA-0867**




Fig. 13

In mm

**UA-0553**

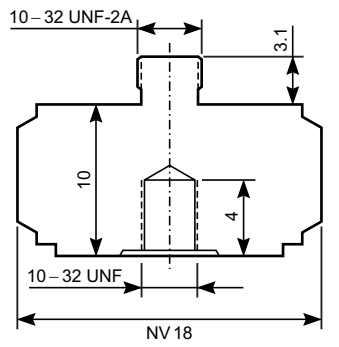


Fig. 14

In mm

**WA-0224**




Fig. 15

In mm

**UA-0643**




Fig. 16

In mm

**UA-1075**




Fig. 17

In mm

**UA-1281**





Fig. 18

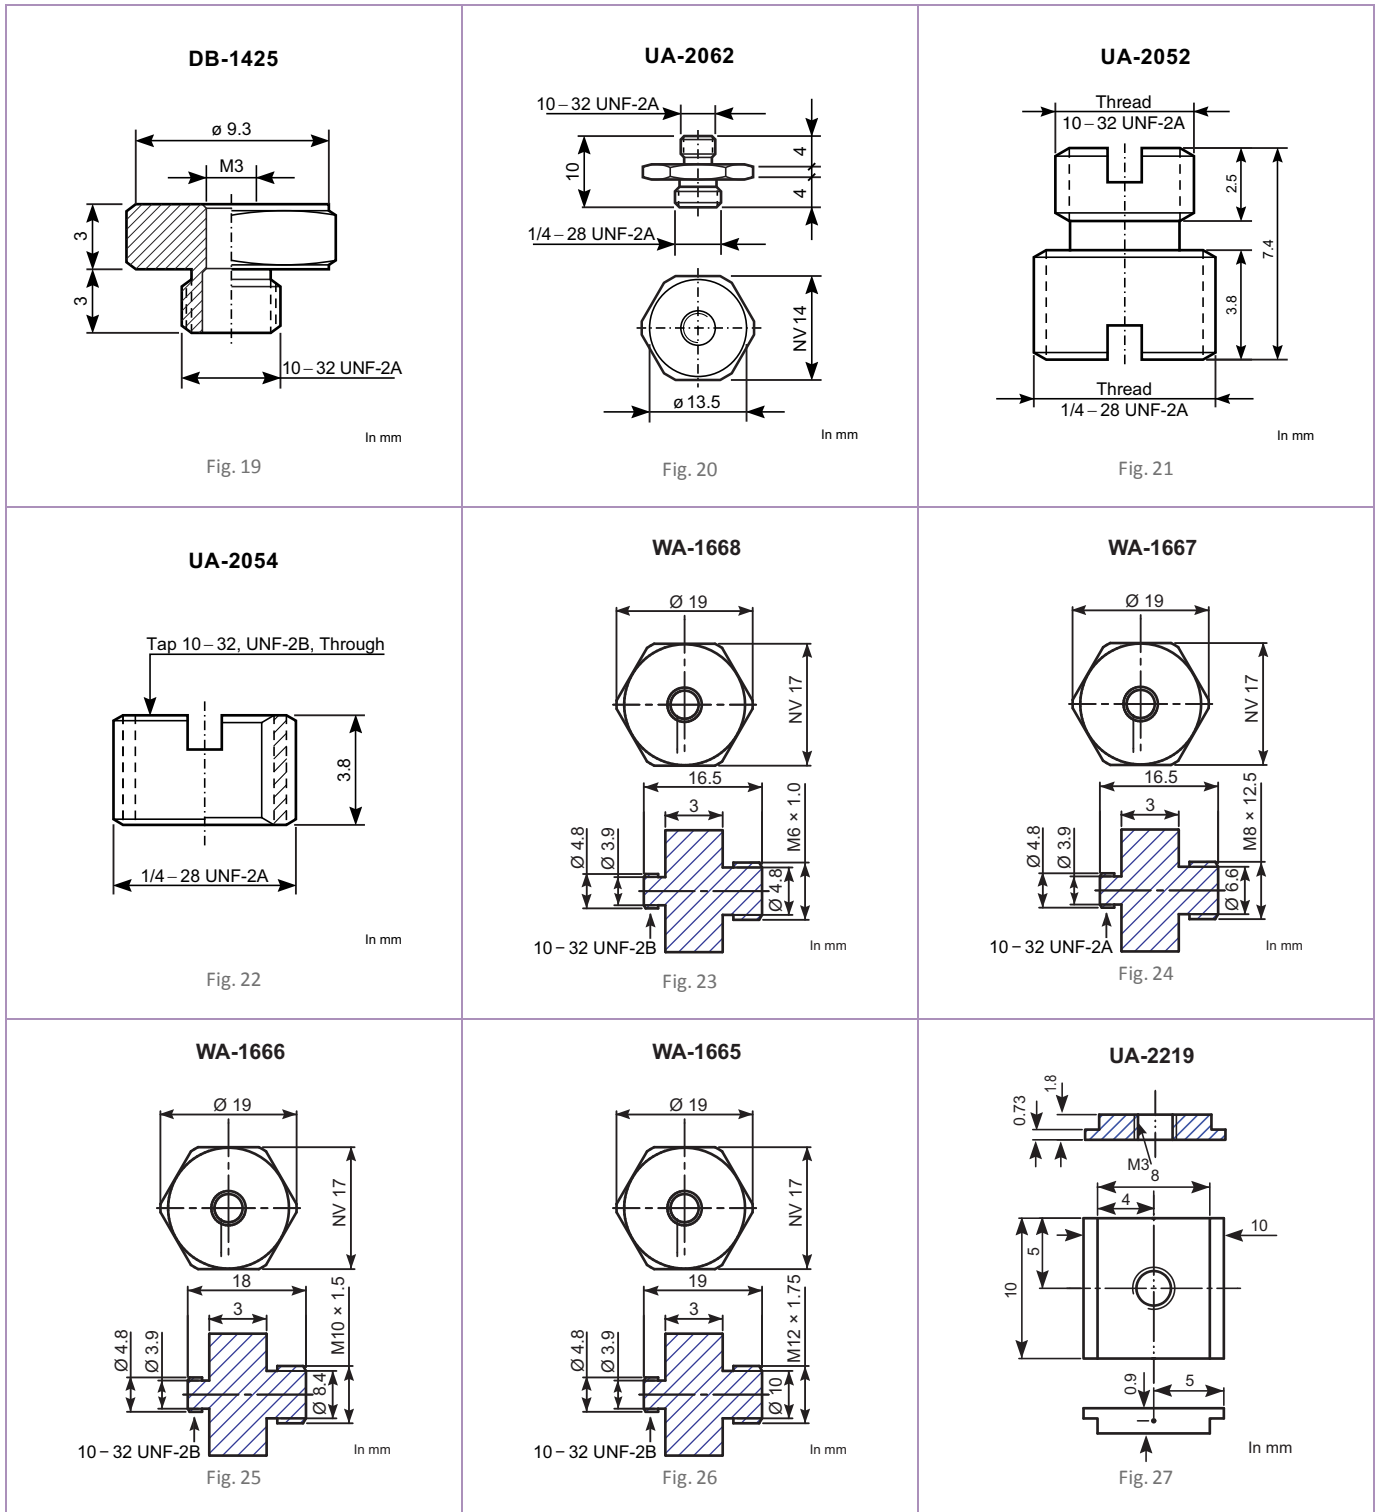

## Nuts

| Thread    | Item No. | Description    |
|-----------|----------|----------------|
| 10-32 UNF | UA-2066  | Set of 20 nuts |
| M3        | UA-2067  | Set of 20 nuts |

## Probes

| Item No. | Description                               |
|----------|---|
| YP-0080  | Probe with sharp tip, 10-32 UNF; Test pin |
| DB-0544  | Probe with round tip                      |

## O-rings

| Used With  | Item No. | Description   |
|--|----------|---|
| Accelerometers with 10–32 UNF connector              | UA-2222  | Set of 100 $\varnothing$ 3.10 mm $\times$ $\varnothing$ 1.60 mm Black, SIL 50 |
| Accelerometers with M3 connector                     | UA-2221  | Set of 100 $\varnothing$ 2.25 mm $\times$ $\varnothing$ 0.65 mm Black, NBR 70 |
| Accelerometers with 1/4"–28 UNF connector (Triaxial) | UA-2220  | $\varnothing$ 5.00 mm $\times$ $\varnothing$ 1.00 mm Black, FPM 75            |

## Adhesives

| Used With                            | Item No.           | Description  |
|--------------------------------------|--------------------|--|
| General purpose accelerometers       | YJ-0216            | Beeswax for mounting   |
| General purpose accelerometers       | QS-0007            | Tube of cyanoacrylate adhesive                                       |
|                                      | QS-0003            | Loctite 222 threadlocker, purple, low strength, 10 ml (0.34 oz)      |
|                                      | EL-2019<br>EL-2330 | HBM-X-60 Bonds   |
| Types 4374, 4375, 4393, 4394, 4397-A | YO-0073            | 25 $\times$ Double adhesive mounting disc; $\varnothing$ 5 mm (0.2") |
|                                      | DU-0079            | 1 $\times$ Double adhesive mounting disc; $\varnothing$ 40 mm (1.6") |
| Calibration                          | ÆX-9133            | Grease, for vacuum or low pressure use, 0 to 150 °C                  |

## Impact Tips and Caps

| Used with  | Item No. | Description  |
|--|----------|--|
| Type 8207  | UA-2057  | Set of four impact tips                                    |
| Type 8208  | UA-2058  | Set of four impact tips                                    |
| Types 8206, 8206-001, 8206-002, 8206-003             | UA-2059  | Set of three impact tips                                   |
| Type 8210  | UA-2060  | Set of four impact tips                                    |
| Types 8230, 8230-001, 8230-002, 8230-003, 8230-C-003 | DB-3989  | Impact cap with 1/4"–28 UNF threaded stud, stainless steel |

## Tools

| Item No. | Description                                     |
|----------|---|
| QA-0029  | Tap for 10–32 UNF thread                        |
| QA-0231  | Tap for 2–56 UNF thread                         |
| QA-0041  | Tap for M3 thread                               |
| QA-0068  | Tap for M5 thread                               |
| QA-0141  | Tap for M8 thread                               |
| QA-0013  | Hexagonal key for 10–32 UNF studs               |
| QA-0042  | Hexagonal key for M3 studs                      |
| QA-0038  | Hexagonal key for M4 studs                      |
| QA-0121  | Hexagonal key for M8 studs                      |
| QA-0220  | Cable connecting/removal tool                   |
| QA-0230  | Removal wrench for teardrop type accelerometers |

## Screws

| Thread                               | Item No.           | Description   |
|--------------------------------------|--------------------|---|
| M2 $\times$ 10 mm                    | YQ-8941            | Steel screw, hex socket head cap, DIN 912 Used with Types 4326-A, 4326-A-001, 4326-001                                |
| M4 $\times$ 16 mm                    | YQ-0093            | Steel screw, hex socket head cap, DIN 912 Used with Types 4321, 4321-V  |
| M4 $\times$ 22 mm                    | YS-9901            | Stainless steel screw with hole for thread fastening Used with Type 4511-001  |
| M4 $\times$ 15 mm partially threaded | YS-0449            | Screw, socket head cap, titanium for tool 3.0 mm hex Used with Type 4523  |
| M4 $\times$ 12 mm                    | YS-8406            | Screw, with lock wire holes, hex socket head cap, stainless steel Used with Type 8347-C                               |
| 2–56 UNF                             | UA-2055            | Set of 10 mounting screws, length 9.5 mm (0.37") Used with Types 4521, 4521-C   |
| 4–40 in                              | UA-2080            | Set of 25 head cap screws, length 11 mm (0.42") with washer Used with Types 4570, 4571, 4572, 4573, 4574, 4575        |
| M2 $\times$ 10 mm                    | UA-2069<br>YK-1110 | Set of 10 mounting screws, length 10 mm (0.39")<br>Screw, pan head, Pozidriv <sup>®</sup> DIN 7985 A, stainless steel |
| M2 $\times$ 4 mm                     | YS-0290            | Screw, special PH, black  |
| M2.5 $\times$ 6 mm                   | YK-2206            | Screw, flat head, Pozidriv DIN 965 A, stainless steel   |
| M3 $\times$ 5 mm                     | YQ-2003            | Screw, hex socket set with cup point, DIN 916, steel  |
| M3 $\times$ 8 mm                     | YQ-2007            | Screw, hex socket set with cup point, DIN 916, steel  |
| M4 $\times$ 10 mm                    | YK-1410            | Screw, pan head, Pozidriv DIN 7985 A, stainless steel   |
| M4                                   | YS-0045            | Finger screw  |
| M5 $\times$ 10 mm                    | YQ-9209            | Screw, hex socket low head cap, DIN 6912 steel  |
| M5 $\times$ 16 mm                    | YQ-9215            | Screw, hex socket head cap, DIN 912, stainless steel  |
| M5                                   | YS-0810            | Inset screw   |
| 1/4"–28 UNF                          | UA-2053            | Set of 10 mounting screws, length 28.6 mm (1.13")   |
| 1/6" $\times$ 9.0 mm                 | YS-0067            | Screw, special contact Brüel & Kjær type, gold plated   |
| 10–32 UNF $\times$ 1/2" (12.8 mm)    | YQ-2960            | Screw socket set screw, flat end, steel   |
| 10–32 UNF $\times$ 5/16" (7.7 mm)    | YQ-2962            | Screw socket set screw, flat end, steel   |
| 10–32 UNF $\times$ 3/8"              | YQ-8168            | Screw hex socket countersunk, flat head, black steel  |
| 10–32 UNF                            | YS-0811            | Inset screw   |

## Accessory Sets

| Item No. | Description   | Used With                              | Item No. | Description   | Used With  |
|----------|---|--|----------|---|------------|
| UA-0078  | <ul style="list-style-type: none"> <li>1 × Probe with round tip, 10–32 UNF</li> <li>1 × Cementing Stud 10–32 UNF; <math>\varnothing</math> 14 mm (0.55")</li> <li>1 × Plug Adaptor 10–32 UNF to TNC</li> <li>1 × Hexagonal Key for 10–32 UNF studs</li> <li>1 × Tap for 10–32 UNF thread</li> <li>1 × Mounting Magnet and two Insulating Discs</li> <li>1 × Beeswax for mounting</li> <li>1 × Steel Nut 10–32 UNF</li> <li>1 × Insulating Mica Washer</li> <li>1 × Probe with sharp tip</li> <li>1 × Insulated Stud 10–32 UNF; Length: 12.7 mm (0.5")</li> <li>4 × Steel Stud 10–32 UNF thread; Length: 12.7 mm (0.5")</li> </ul> | 4370, 4371<br>4381, 4382<br>4383, 4384 | UA-0844  | <ul style="list-style-type: none"> <li>1 × Cementing Stud 10–32 UNF; <math>\varnothing</math> 14 mm (0.55")</li> <li>1 × Hexagonal Key for 10–32 UNF studs</li> <li>1 × Tap for 10–32 UNF thread</li> <li>1 × Mounting Magnet and two Insulating Discs</li> <li>3 × Steel Stud 10–32 UNF thread; Length: 12.7 mm (0.5")</li> </ul>                | 4391       |
| UA-0125  | <ul style="list-style-type: none"> <li>1 × Hexagonal Key for 10–32 UNF studs</li> <li>1 × Tap for 10–32 UNF thread</li> <li>10 × Steel Nut 10–32 UNF</li> <li>10 × Insulating Mica Washer</li> <li>10 × Insulated Stud 10–32 UNF; Length: 12.7 mm (0.5")</li> <li>10 × Steel Stud 10–32 UNF thread; Length: 12.7 mm (0.5")</li> </ul>   | General purpose accelerometers         | UA-1079  | <ul style="list-style-type: none"> <li>3 × Extension Connector for cables, 10–32 UNF to 10–32 UNF</li> <li>1 × Plug Adaptor 10–32 UNF to TNC</li> <li>1 × Tube of Cyanoacrylate Adhesive</li> <li>1 × Beeswax for mounting</li> <li>1 × Adhesive Mounting Disc</li> </ul>   | 4374       |
| UA-0146  | <ul style="list-style-type: none"> <li>1 × Cementing Stud 10–32 UNF; <math>\varnothing</math> 14 mm (0.55")</li> <li>3 × Plug Adaptor 10–32 UNF to TNC</li> <li>1 × Hexagonal Key for 10–32 UNF studs</li> <li>1 × Tap for 10–32 UNF thread</li> <li>1 × Hexagonal Key for M 4 screws</li> <li>1 × Beeswax for mounting</li> <li>1 × Steel Nut 10–32 UNF</li> <li>3 × Insulating Mica Washer</li> <li>1 × Insulated Stud 10–32 UNF; Length: 12.7 mm (0.5")</li> <li>11 × Steel Screw M4 thread; Length: 16 mm (0.6")</li> <li>5 × Steel Stud 10–32 UNF thread; Length: 12.7 mm (0.5")</li> </ul>                                  | 4321                                   | UA-1218  | <ul style="list-style-type: none"> <li>3 × Extension Connector for cables, 10–32 UNF to 10–32 UNF</li> <li>1 × Plug Adaptor, BNC to 10–32 UNF</li> <li>1 × Tap for M3 thread</li> <li>1 × Hexagonal Key for M3 studs</li> <li>1 × Tube of Cyanoacrylate Adhesive</li> <li>1 × Beeswax for mounting</li> <li>1 × Adhesive Mounting Disc</li> </ul> | 4394, 4397 |
| UA-0629  | <ul style="list-style-type: none"> <li>2 × Cement Stud, M3, <math>\varnothing</math> 8.0 mm (0.3")</li> <li>3 × Extension Connector for cables, 10–32 UNF to 10–32 UNF</li> <li>1 × Plug Adaptor 10–32 UNF to TNC</li> <li>1 × Tap for M3 thread</li> <li>1 × Hexagonal Key for M 3 studs</li> <li>1 × Tube of Cyanoacrylate Adhesive</li> <li>1 × Mounting Magnet M3 thread and two Insulating Discs</li> <li>1 × Beeswax for mounting</li> <li>1 × M3 Nut</li> <li>1 × Adhesive Mounting Disc</li> <li>3 × M3 Steel Stud; Length: 5 mm (0.1")</li> <li>2 × M3 threaded Steel Stud; Length: 8 mm (0.3")</li> </ul>               | 4375, 4393                             |          |   |            |








# ACCELEROMETER MOUNTING SOLUTIONS

## Mounting Considerations

To measure vibration accurately, one must ensure that the useful frequency and dynamic range are not limited by poor accelerometer mounting. One of the main requirements for good accelerometer mounting is for a rigid mechanical contact between

the accelerometer base and the surface to which it is to be attached. To achieve this, Brüel & Kjær has a wide variety of highly specialized mounting accessories. However, before choosing any accessory, you should keep in mind the considerations listed below.

## Choosing the Right Mounting Method

|   |   |
|---|---|
| <p><b>Stud Mounting</b></p> <p>Mounting the accelerometer with a steel stud is the best mounting method because the highest mounted resonance frequency can be achieved. Hence, this mounting method should be used in all applications whenever possible.</p>  |    |
| <p><b>Cement Studs</b></p> <p>In places where it is not feasible or desirable to drill and tap fixing holes, a cementing stud may provide the optimum mounting solution. Such a cementing stud can be fixed onto the test object with the aid of epoxy or cyanoacrylate cement. The frequency response will be nearly as good as that obtained using a plain stud. Soft glues must be avoided as a significant reduction in coupling stiffness will greatly reduce the useful frequency range of the accelerometer.</p>   |    |
| <p><b>Mounting with the Aid of Beeswax</b></p> <p>For quick mounting of an accelerometer, for example for surveying vibration in various locations with a roving accelerometer, beeswax can be used for convenient mounting and dismantling of the accelerometer. Because beeswax becomes soft at high temperatures, the method is restricted to about 40°C.</p>  |   |
| <p><b>Insulated Mounting</b></p> <p>In places where it is desirable to electrically insulate the accelerometer from the test object, an insulated stud and a mica washer can be used. This could be either because the electrical potential of the test object is different from the ground potential of the test instrumentation, or because direct stud mounting will create a ground loop, which could affect the measurement. The latter is the most common reason for use of an insulated mounting method. Special insulated mounting pads made from ceramic and metal brazed together are also available for use at high temperatures.</p>  |  |
| <p><b>Mounting with the Aid of a Permanent Magnet</b></p> <p>A convenient method of mounting the accelerometer is by using a permanent magnet, which easily and rapidly can be shifted from one position to another—especially useful for surveying a large number of measurement points in the shortest possible test time. The method is restricted to use on clean and flat ferromagnetic surfaces and the dynamic range is limited due to the limited force of the magnet; yet, the method may give good high-frequency performance, especially on flat surfaces.</p> <p>Fitting a self-adhesive disc on the magnet will provide electrical insulation between the accelerometer and the surface to which it is attached.</p>   |  |
| <p><b>Mounting Clips and Swivel Bases</b></p> <p>Some accelerometer housings have slots, allowing the use of mounting clips so that the accelerometer can swiftly be fitted to the test object. Mounting clips are glued to the test object using hot glue or fitted with double-sided adhesive tape. A mounting clip with a unique swivel base construction is available, making it easy to align the accelerometer in accordance with the defined coordinate system. A spirit level is available for this purpose. Several other mounting clips are available, providing unique benefits in adverse mounting situations, such as a mounting clip with a thick base that can be filed down to conform to curved mounting surfaces. High-temperature mounting clips are also available, along with specially designed clips allowing swift accelerometer calibrations. All mounting clips have undergone extensive testing to ensure the utmost quality, reliability and consistency in the measurement data.</p> |  |
| <p><b>Mechanical Filter</b></p> <p>The resonance peak on the accelerometer frequency response curve can be cut-off or reduced in amplitude with the aid of electronic filters in the measurement equipment. As most electronic filtering is made after the input stage in the preamplifier, this does not prevent overloading of the input stage or of the accelerometer. With the aid of a mechanical filter, mounted in between the accelerometer and the test object, an effective filtering of the mechanical vibration signal is obtained, protecting the whole measurement chain. The mechanical filter also provides electrical insulation between the accelerometer base and the mounting point.</p>  |  |

### Use of a Hand-held Probe or Long Rod

A hand-held probe with the accelerometer mounted on top is very convenient for quick-check survey work and for accessing confined measurement locations. However, due to low overall mechanical stiffness and lack of adequate contact force to the test object, the mounted resonance frequency will typically be very low. With this method, there are potential risks for gross measurement errors.

For measuring vibration in difficult-to-reach locations, the accelerometer can be mounted at the end of a steel pipe or rod within a rubber ring. A slightly rounded tip must be mounted onto the mounting surface of the accelerometer to ensure proper mechanical contact with the test object, even at slightly skewed angles. The response is far superior to the hand-held probe method.


### Choosing a Mounting Position for the Accelerometer

The accelerometer should be mounted so that the desired measuring direction coincides with the main sensitivity axis. Accelerometers are slightly sensitive to vibrations in the transverse direction, but this can normally be ignored as the maximum transverse sensitivity is typically only a few percent of the main axis sensitivity. The reason for conducting vibration measurement tests will normally dictate the position of the accelerometer. In the drawing to the side, the purpose is to monitor the condition of the shaft and bearing. In this instance, the accelerometer should be positioned to maintain a direct path for the vibration from the bearing. Accelerometer 'A', thus, detects the vibration signal from the bearing predominant over vibrations from other parts of the machine, but accelerometer 'B' receives the bearing vibration modified by transmission through a joint, mixed with signals from other parts of the machine. Likewise, accelerometer 'C' is positioned in a more direct path than accelerometer 'D'.

It is very difficult to give general rules about placement of accelerometers, as the response of mechanical objects to forced

vibrations is a complex phenomenon, so that one can expect, especially at high frequencies, to measure significantly different vibration levels and frequency spectra, even on adjacent measuring points on the same machine element.

Accelerometer mounting position when monitoring the condition of the shaft and bearing

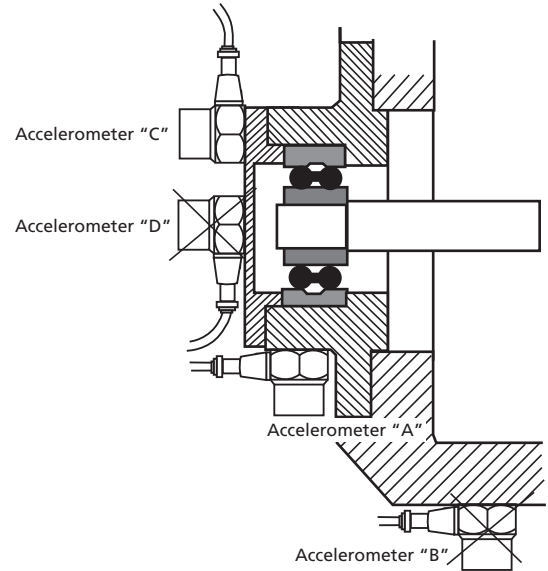

030105

### Loading the Test Object

When the accelerometer is mounted on the test object it will increase the mass of the vibrating system, thereby influencing the mechanical properties of the test object. As a general rule, the accelerometer mass should be no more than 1/10 of the 'local' dynamic mass of the vibrating part onto which it is mounted.

### Mounting of Type 4326-A-001

Special effort has been put into making mounting as flexible as possible. For fast and easy mounting, Mounting Clips UA-1408, UA-1473 and UA-1474 can be used and five of the accelerometer's six surfaces can be used for mounting with adhesive cement or mounting wax. Where threaded holes can be provided in the test object, the accelerometer can be mounted from the top via mounting holes in the base using three M2 screws. See the following series of images for mounting hole positions.



# ACCELEROMETER CABLES

## Brüel & Kjær Cables

A combination of measurement requirements, physical limitations, and environmental conditions usually determines the best choice of cable type. Brüel & Kjær provides a wide variety of high-quality cables and adaptors to ensure optimal electrical connections throughout the measurement setup.

Most cables employ a combination of a PTFE\* insulator and PFA† jacket, providing advantageous properties such as low coefficient of friction, mechanical strength, excellent dielectric insulation, wide temperature range, low gas permeability, and chemical and flame resistance.

The super low noise (SLN) and low noise (LN) cables feature Brüel & Kjær's proprietary and unique noise treatment, which has set the industry standard for cables used with charge sensors (high-impedance) to avoid triboelectric noise. The low-cost cables cover flexible industry standard coaxial cables only recommended for sensors with integrated electronics.

In addition to the standard cable lengths, which are available from stock for immediate shipment, Brüel & Kjær offers cables with custom cable lengths. Please consult your local representative for further information.

**AO-XXXX-Y-ZZZ** where:

- **AO-XXXX** is the basic cable type
- **Y** is length units in D (decimetre 0.1 m) or M (metre)
- **ZZZ** is the length value

## Maximum Cable Length (CCLD)

The maximum output voltage of a CCLD accelerometer when driving long cables depends on the supply current at which it is operating, and on the capacitive load due to the connecting cable.

The maximum cable length in metres (for distortion ≤1%) is given by:

$$L = 140000 \times \frac{I_s - 1}{f \times V_o \times C_m}$$

where:

$I_s$  = supply current (mA)

$f$  = frequency (kHz)


$V_o$  = output voltage ( $V_{peak}$ )

$C_m$  = cable capacitance (pF/m)

\* Polytetrafluoroethylene  
† Perfluoroalkoxy

## Maximum Cable Length (Charge)

The figure below shows the influence of the input load capacitance on the high frequency response of a Brüel & Kjær charge amplifier.

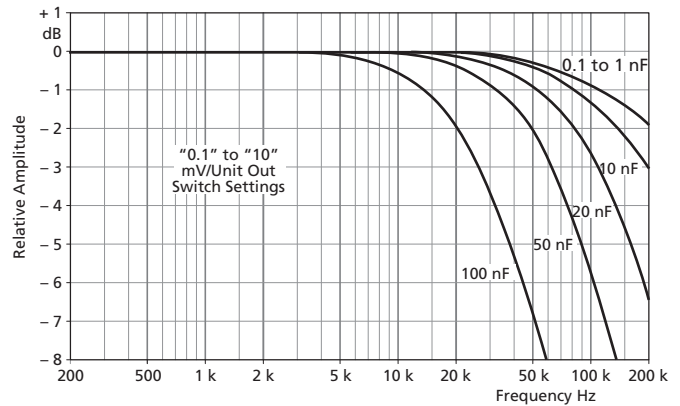


760378/2

## How to Use Cables

When measuring low level vibrations where it appears in the form of noise:

- Use special coaxial cables with a noise reduction treatment. This is a standard feature of all accelerometer cables supplied by Brüel & Kjær
- Avoid sharp bending cable or twist cable because this will not only reduce the noise reduction treatment but also damage the connectors
- The cable should be clamped to the test specimen to avoid relative movement which causes triboelectric noise

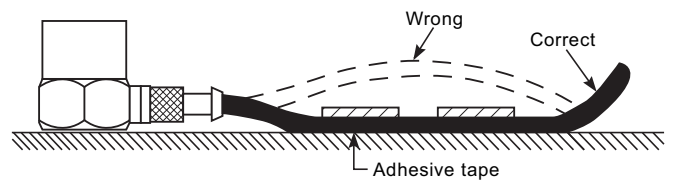

120336

How to handle very strong electromagnetic field causing extraneous noise in the measurement signal:

- Carefully route the cable away from sources of high electromagnetic fields
- Use a balanced accelerometer such as Types 8315 and 8347-C and special cable

## Bending Radius – Rule of Thumb

- Softline cable: 10 times the outer diameter of the jacket
- Hardline cable: 5 times the outer diameter of the jacket

# Coaxial Cable Assemblies for Uniaxial Accelerometers

Our most popular cables are marked with ◆. These offer the best delivery times and prices.

| Connector A                   | Connector B                      | Temperature                       | Item No.                                     | Description  |
|-------------------------------|----------------------------------|-----------------------------------|--|--|
| 10-32 UNF<br>Male             | 10-32 UNF<br>Male                | -75 to +250 °C<br>-103 to +482 °F | <span style="color: green;">◆</span> AO-0038 | Super low-noise coaxial cable<br>All-round use<br>Raw cable: AC-0005<br>Recommended for all transducers  |
| 10-32 UNF<br>Male<br>Straight | 10-32 UNF<br>Male<br>Right angle | -75 to +250 °C<br>-103 to +482 °F | AO-0741                                      | AO-0038 with right-angle connector at one end<br>Super low-noise coaxial cable<br>Raw cable: AC-0005<br>Recommended for all transducers                          |
| 10-32 UNF<br>Male             | 10-32 UNF<br>Male                | -40 to +120 °C<br>-40 to +248 °F  | AO-0687                                      | AO-0038 with extensive molded connector relief<br>All round use, especially suitable for rough handling<br>Raw cable: AC-0005<br>Recommended for all transducers |
| 10-32 UNF<br>Male             | 10-32 UNF<br>Male                | -40 to +100 °C<br>-40 to +212 °F  | AO-0692                                      | Rated IP67<br>Super low-noise, coaxial cable<br>Raw cable: AC-0005<br>Recommended for temporary underwater submersion  |
| 10-32 UNF<br>Male             | 10-32 UNF<br>Male                | -75 to +250 °C<br>-103 to +482 °F | <span style="color: green;">◆</span> AO-0122 | Robust cable<br>Double-screened<br>Raw cable: AC-0200<br>Recommended for harsh environments and rough handling   |
| 10-32 UNF<br>Male             | 10-32 UNF<br>Male                | -75 to +135 °C<br>-103 to +275 °F | AO-0755                                      | Robust cable with extensive relief at connectors<br>Double-screened<br>Raw cable: AC-0200<br>Recommended for harsh environments and rough handling               |
| 10-32 UNF<br>Male             | 10-32 UNF<br>Male                | -50 to +250 °C<br>-58 to +482 °F  | AO-1382                                      | Low-noise coaxial cable, double-screened<br>Light and flexible<br>Raw cable: AC-0104<br>Recommended for flexibility  |





| Connector A    | Connector B    | Temperature                       | Item No.  | Description   |
|----------------|----------------|-----------------------------------|-----------|---|
| 10-32 UNF Male | 10-32 UNF Male | -75 to +250 °C<br>-103 to +482 °F | AO-1419   | Low-noise coaxial cable, single-screened<br>Very light and flexible<br>Raw cable: AC-0066<br>Recommended for miniature transducers    |
| 10-32 UNF Male | 10-32 UNF Male | -20 to +70 °C<br>-4 to +158 °F    | AO-0463   | Low-cost coaxial cable<br>Single-screened<br>Raw cable: AC-0208<br><b>Not</b> recommended for charge transducers                      |
| 10-32 UNF Male | 10-32 UNF Male | -65 to +150 °C<br>-85 to +302 °F  | AO-0704   | White<br>With low out-gassing properties<br>Low-noise coaxial cable<br>Raw cable: AC-0195<br>Recommended for high vacuum environments |
| 10-32 UNF Male | BNC Male       | -55 to +250 °C<br>-58 to +482 °F  | AO-0406   | Light and flexible double-screened<br>Raw cable: AC-0104<br>Includes JP-0145 (10-32 UNF to BNC plug adaptor)                          |
| 10-32 UNF Male | BNC Male       | -20 to +70 °C<br>-4 to +158 °F    | ◆ AO-0531 | Low-cost coaxial cable<br>Single-screened<br>Raw cable: AC-0208<br>Not recommended for charge transducers                             |



| Connector A    | Connector B            | Temperature   | Item No.  | Description   |
|----------------|------------------------|---|-----------|---|
| 10-32 UNF Male | SMB Female             | -75 to +250 °C<br>-103 to +482 °F<br>SMB end: Max 135 °C (275 °F)               | AO-0699   | Super low-noise<br>Single-screened coaxial cable<br>Raw cable: AC-0005<br>Recommended for all round use   |
| 10-32 UNF Male | SMB Female             | -20 to +70 °C<br>-4 to +158 °F  | AO-0691   | Low-cost coaxial cable<br>Single-screened<br>Raw cable: AC-0189<br><b>Not</b> recommended for charge transducers  |
| 10-32 UNF Male | TNC Male               | -75 to +250 °C<br>-103 to +482 °F<br>TNC end: Max. 120 °C (248 °F)              | AO-0231   | Super low-noise coaxial cable<br>Single-screened<br>Raw cable: AC-0005<br>Recommended for all-round use   |
| 10-32 UNF Male | Open end               | -75 to +250 °C<br>-103 to +482 °F   | AO-0482   | Low-noise coaxial cable<br>Extremely lightweight and flexible<br>Single-screened<br>Raw cable: AC-0066<br>Recommended for all-round use                                     |
| 10-32 UNF Male | Circular-00 2-pin Male | -75 to +250 °C<br>-103 to +482 °F<br>Circular-00 2-pin end: Max. 90 °C (194 °F) | AO-0695   | Super low-noise coaxial cable<br>Raw cable: AC-0005<br>Recommended for all accelerometers to connect with Human Vibration Analyzer Type 4447                                |
| M3 Male        | 10-32 UNF Male         | -75 to +250 °C<br>-103 to +482 °F   | ◆ AO-0283 | Super low-noise coaxial cable<br>Single-screened<br>Raw cable: AC-0205<br>Recommended for all-round use for accelerometers with M3 connectors                               |
| M3 Male        | 10-32 UNF Male         | -75 to +250 °C<br>-103 to +482 °F   | AO-0339   | Extremely lightweight and flexible<br>Low-noise coaxial cable, single-screened<br>Raw cable: AC-0066<br>Recommended for all-round use for accelerometers with M3 connectors |
| M3 Male        | 10-32 UNF Male         | -50 to +250 °C<br>-58 to +482 °F  | AO-1381   | Low-noise coaxial cable<br>Flexible double-screened<br>Raw cable: AC-0104<br>Recommended for Types 4394,4397, 4518, 4519, 4521  |





| Connector A             | Connector B      | Temperature   | Item No.  | Description  |
|-------------------------|------------------|---|-----------|--|
| M3 Male                 | 10–32 UNF Male   | –65 to +150 °C<br>–85 to +302 °F                                      | AO-0703   | White<br>With low out-gassing properties<br>Super low-noise coaxial cable<br>Raw cable: AC-0195<br>Recommended for high vacuum environments  |
| M3 Male                 | BNC Male         | –75 to +250 °C<br>–103 to +482 °F<br>BNC end: Max.<br>120 °C (248 °F) | ◆ AO-0641 | Super low-noise coaxial cable<br>Single-screened<br>Raw cable: AC-0205<br>Recommended for Types 4518, 4519, 4397, 4394, 4521   |
| M3 Male                 | SMB Female       | –75 to +250 °C<br>–103 to +482 °F<br>SMB end: Max.<br>135 °C (275 °F) | AO-0698   | Super low-noise<br>Single-screened coaxial cable<br>Raw cable: AC-0205<br>Recommended for Types 4518, 4519, 4397, 4394, 4521   |
| 3–56 UNF Male           | 10–32 UNF Female | –30 to +200 °C<br>–22 to +392 °F                                      | ◆ AO-0638 | Low-noise coaxial cable<br>Light and flexible<br>Recommended for miniature transducers (Type 4517 family) with 3–56 UNF threaded connector   |
| 3-pin MIL-C-5015 Female | Open end         | –75 to +250 °C<br>–103 to +482 °F                                     | AO-0642   | 3-wire (twisted) shielded cable<br>Electrically and environmentally robust<br>Raw cable: AC-0294<br>Durable for permanent installations<br>Recommended for Type 4511-001           |
| Circular-1B Female      | Circular-0B Male | –20 to +80 °C<br>–4 to +176 °F  | AO-0700   | For DC response transducers with 7-pin circular LEMO connector<br>PUR jacket<br>Recommended for Types 457x-001 and 457x-D-001 and differential amplifier Type 2697                 |
| Circular-1B Female      | Circular-1B Male | –20 to +80 °C<br>–4 to +176 °F  | AO-0414   | Extension cable for DC response transducers with 7-pin circular LEMO connector<br>PUR jacket<br>Recommended for Types 457X-001 and 457X-D-001 and differential amplifier Type 2697 |
| Series 800 3-pin Female | BNC Male         | –75 to +150 °C<br>–103 to +302 °F<br>BNC end: max<br>135 °C (275 °F)  | AO-0746   | Robust cable for permanent installation<br>Raw cable: AC-0294<br>Recommended for Type 4511-006   |



# Coaxial Cable Assemblies for Triaxial Accelerometers

Our most popular cables are marked with . These offer the best delivery times and prices.

| Connector A           | Connector B           | Temperature  | Item No.   | Description   |
|-----------------------|-----------------------|--|--|---|
| Circular 4-pin Female | 3 × 10–32 UNF Male    | –75 to +90 °C<br>–103 to +194 °F<br>Splitter*:<br>–40 to +150 °C<br>–40 to +302 °F   | AO-0527  | Single-screened coaxial cable with four wires<br>PUR jacket<br>Raw cable: AC-0220/AC-0005<br>Recommended for all Brüel & Kjær CCLD triaxial accelerometers                            |
| Circular 4-pin Female | 3 × 10–32 UNF Male    | –75 to +250 °C<br>–103 to +482 °F<br>Splitter*:<br>–40 to +150 °C<br>–40 to +302 °F  | AO-0740  | Single-screened coaxial cable with four wires<br>Raw cable: AC-0223/AC-0005<br>Recommended for all Brüel & Kjær CCLD triaxial accelerometers  |
| Circular 4-pin Female | 3 × BNC Male          | –75 to +90 °C<br>–103 to +194 °F<br>Splitter*:<br>–40 to +150 °C<br>–40 to +302 °F   |  AO-0526  | Single-screened coaxial cable with four wires<br>Raw cable: AC-0220/AC-0005<br>Recommended for all Brüel & Kjær CCLD triaxial accelerometers  |
| Circular 4-pin Female | 3 × BNC Male          | –75 to +250 °C<br>–103 to +482 °F<br>Splitter*:<br>–40 to +150 °C<br>–40 to +302 °F  |  AO-0534 | Single-screened coaxial cable with four wires<br>Raw cable: AC-0223/AC-0005<br>Recommended for all Brüel & Kjær CCLD triaxial accelerometers  |
| Circular 4-pin Female | 3 × SMB Female        | –75 to +90 °C<br>–103 to +194 °F<br>SMB end: Min. –20 °C (–4 °F), max. +70 °C (158 °F)<br>Splitter*:<br>–40 to +150 °C<br>–40 to +302 °F | AO-0690  | Single-screened coaxial cable with four wires<br>Raw cable: AC-0220/AC-0208<br>Recommended for all Brüel & Kjær CCLD triaxial accelerometers  |
| Circular 4-pin Female | Circular 4-pin Male   | –75 to +250 °C<br>–103 to +482 °F  | AO-0714  | Single-screened coaxial cable with four wires<br>Raw cable: AC-0223<br>Recommended for high-temperature use as an extension cable for Types 4527 and 4528                             |
| Circular 4-pin Female | Circular 4-pin Female | –75 to +90 °C<br>–103 to +194 °F   | AO-0528  | Single-screened coaxial cable with four wires<br>Raw cable: AC-0220<br>Recommended for all Brüel & Kjær CCLD triaxial accelerometers as an extension cable                            |
| Circular 4-pin Female | Circular-004-pin Male | –75 to +90 °C<br>–103 to +194 °F<br>Circular-004-pin end: –40 to +80 °C (–40 to +176 °F)   | AO-0693  | Single-screened coaxial cable with four wires<br>Raw cable: AC-0220<br>Recommended for all Brüel & Kjær CCLD triaxial accelerometers connecting to Human Vibration Analyzer Type 4447 |



| Connector A               | Connector B            | Temperature  | Item No. | Description  |
|---------------------------|------------------------|--|----------|--|
| Circular 4-pin Female     | Circular-00 3-pin Male | -20 to +90 °C<br>-4 to +194 °F   | AO-1454  | Electrically and environmentally robust<br>Durable for permanent installations<br>Raw cable: AC-0220   |
| Circular-00 4-pin Male    | 3 × 10-32 UNF Male     | -75 to +90 °C<br>-103 to +194 °F<br>Circular-00 4-pin end: -40 to +80 °C (-40 to +176 °F)<br>Splitter*: -40 to +150 °C<br>-40 to +302 °F | AO-0694  | Single-screened coaxial cable with four wires<br>Raw cable: AC-0220<br>Recommended for connecting accelerometers to Human Vibration Analyzer Type 4447                                       |
| 3 × 10-32 UNF Male        | 3 × 10-32 UNF Male     | -75 to +250 °C<br>-103 to +482 °F<br>Splitter*: -40 to +150 °C<br>-40 to +302 °F   | AO-0688  | 4-wire coaxial cable terminating in three single-wire coaxial cables at each end<br>Raw cable: AC-0220/AC-0223<br>Recommended for all Brüel & Kjær CCLD triaxial accelerometers              |
| 2 × Circular 4-pin Female | Sub-D 37-pin Female    | -75 to +90 °C<br>-103 to +194 °F   | AO-0536  | Single-screened coaxial cable with four wires for two triaxial accelerometers<br>Raw cable: AC-0220<br>Recommended for all Brüel & Kjær CCLD triaxial accelerometers to PULSE multi-analyzer |
| Serial-800 4-pin Female   | 3 × BNC Male           | -75 to +250 °C<br>-103 to +482 °F<br>Splitter*: -40 to +150 °C<br>-40 to +302 °F   | AO-0745  | Robust cable suitable for permanent monitoring<br>Raw cable: AC-0294/AC-0005<br>Recommended for Brüel & Kjær triaxial industrial accelerometer Type 8345 family                              |
| 3 × 10-32 UNF Male        | 3 × BNC Male           | -75 to +250 °C<br>-103 to +482 °F<br>Splitter*: -40 to +150 °C<br>-40 to +302 °F   | AO-0759  | Low-noise cable<br>Raw cable: AC-0223/AC-0005<br>Recommended for all transducers   |
| M3 Male                   | Circular-00 2-pin Male | -50 to +105 °C<br>(-58 to +221 °F)   | AO-0701  | Low-noise cable<br>Raw cable: AC-0104<br>Recommended for connecting Brüel & Kjær triaxial accelerometers with M3 connectors to Hand-held Analyzer Types 2250 and 2270                        |
| 10-32 UNF Male            | Circular-00 2-pin Male | -50 to +200 °C<br>(-58 to +392 °F)   | AO-0702  | Low-noise cable<br>Raw cable: AC-0104<br>Recommended for connecting Brüel & Kjær triaxial accelerometers with 10-32 UNF connectors to Hand-held Analyzer Types 2250 and 2270                 |



\* Close-up of cable splitter:



# Cable Assemblies for Industrial and Monitoring Applications

| Connector A                 | Connector B                 | Temperature                      | Item No. | Description  |
|-----------------------------|-----------------------------|----------------------------------|----------|--|
| 2-pin MIL-C-5015 Female     | BNC Male                    | -40 to +150 °C<br>-40 to +302 °F | AO-0608  | Black coaxial cable, ETFE jacket<br>2 wires and double braided shielding<br>Raw Cable: AC-0141<br>Recommended for harsh environments   |
| 2-pin MIL-C-5015 Female     | BNC Male                    | -40 to +150 °C<br>-40 to +302 °F | AO-0616  | Blue coaxial cable, ETFE jacket<br>2 wires and double braided shielding<br>Raw Cable: AC-0194<br>Recommended for explosive areas   |
| 2-pin MIL-C-5015 Female     | Open end                    | -40 to +150 °C<br>-40 to +302 °F | AO-0612  | Black coaxial cable, ETFE jacket<br>2 wires and double braided shielding<br>Raw Cable: AC-0141<br>Recommended for harsh environments   |
| 2-pin MIL-C-5015 Female     | Open end                    | -40 to +150 °C<br>-40 to +302 °F | AO-0623  | Blue coaxial cable, ETFE jacket<br>2 wires and double braided shielding<br>Raw Cable: AC-0194<br>Recommended for explosive areas   |
| 2-pin MIL-C-5015 Female     | Circular-00<br>2-pin Male   | -40 to +85 °C<br>-40 to +185 °F  | AO-0722  | Black coaxial cable, PVC<br>Raw cable: AC-0201<br>Recommended for harsh environments<br>Connects Brüel & Kjær CCLD accelerometer Types 8340 and 8341 to Hand-held Analyzer Types 2250 and 2270 |
| 2-pin 7/16-27<br>UNS Female | 2-pin 7/16-27<br>UNS Female | -55 to +250 °C<br>-67 to +482 °F | AO-0250  | Black coaxial cable<br>2 wires and double braided shielding<br>Raw Cable: AC-0077<br>Recommended for harsh environments  |
| 2-pin 7/16-27<br>UNS Female | BNC Male                    | -55 to +250 °C<br>-67 to +482 °F | WL-0958  | Black coaxial cable<br>2 wires and double braided shielding<br>Raw Cable: AC-0077<br>Recommended for harsh environments  |
| 2-pin 7/16-27<br>UNS Female | Open end                    | -55 to +250 °C<br>-67 to +482 °F | AO-0624  | Blue coaxial cable<br>2 wires and double braided shielding<br>Raw Cable: AC-0087<br>Recommended for explosive areas  |



| Connector A                 | Connector B                 | Temperature   | Item No. | Description   |
|-----------------------------|-----------------------------|---|----------|---|
| 2-pin 7/16-27<br>UNS Female | 3-pin MIL-26482<br>Male     | -55 to +250 °C<br>-67 to +482 °F  | WL-1248  | Black coaxial cable<br>2 wires and double braided shielding<br>Raw Cable: AC-0077<br>Recommended for harsh environments |
| 2-pin 7/16-27<br>UNS Female | Open end                    | -55 to +250 °C<br>-67 to +482 °F  | AO-0757  | Black coaxial cable<br>2 wires and double braided shielding<br>Raw cable: AC-0077<br>Recommended for harsh environment  |
| 3-pin MIL-26482<br>Male     | Open end                    | -55 to +250 °C<br>-67 to +482 °F  | AO-0744  | Black coaxial cable<br>2 wires and double braided shielding<br>Raw cable: AC-0077<br>Recommended for harsh environments |
| 2-pin 7/16-27<br>UNS Male   | TNC Male                    | -55 to +250 °C<br>-67 to +482 °F  | AO-0747  | Black coaxial cable<br>2 wires and double braided shielding<br>Raw Cable: AC-0077<br>Recommended for harsh environments |
| 2-pin 7/16-27<br>UNS Female | 2-pin 7/16-27<br>UNS Male   | -200 to +500 °C<br>-328 to +932 °F<br>Male end: Max.<br>250 °C (482 °F) | AO-0730  | Hardline cable<br>Single-shielded<br>Raw Cable: AC-0202<br>Recommended for harsh environments                           |
| 2-pin 7/16-27<br>UNS Female | 2-pin 7/16-27<br>UNS Female | -200 to +500 °C<br>-328 to +932 °F                                      | AO-0753  | Hardline cable<br>Single-shielded<br>Raw Cable: AC-0202<br>Recommended for harsh environments                           |
| 2-pin 7/16-27<br>UNS Female | 3-pin MIL-26482<br>Female   | -200 to +500 °C<br>-328 to +932 °F                                      | AO-0729  | Hardline cable<br>Double-shielded<br>Raw Cable: AC-0306<br>Recommended for harsh environments                           |



# Cable Accessories

## Accessory Sets

| Item No. | Description  |
|----------|--|
| QA-0035  | Tool set for assembly 10–32 UNF connector JP-0012 and JP-0056 on cables  |
| QA-0220  | Cable mounting tool to mount the cable with M3 connector and assemble on an accelerometer  |
| UA-0130  | 25 × JP-0012 (Male) connector, 10–32 UNF Plug for cables with cable jacket diameter from 1 mm to 3 mm. Recommended for AC-0005, AC-0066, AC-0104, AC-0205 and AC-0208  |
| UA-0730  | 25 × JP-0056 (Male), connector 10–32 UNF plug for cable with maximum cable jacket diameter 3 mm. Recommended for AC-0200   |
| UA-1723  | 10 × JP-0196 (Male) 10–32 UNF Plug Stainless steel for cables with cable jacket diameter 1 mm to 2 mm. Recommended for AC-0005, AC-0066, AC-0104, AC-0205 and AC-0208.<br>Designed and manufactured for high vacuum environments |
| UA-1243  | 3 × 30 Pieces of 1/2/3 Cable markers for cable jacket diameter 1.6 mm<br>Recommended for AC-0205 and AC-0104   |
| UA-1244  | 3 × 30 Pieces of Red/Green/Yellow Cable markers for cable jacket diameter between 1.9 mm and 2.2 mm, –65 to +105 °C<br>Recommended for AC-0005 and AC-0208   |



## Connectors

| Connector Thread                         | Item No. | Description                                       |
|--|----------|---|
| 10–32 UNF (Female) to 10–32 UNF (Female) | UA-0186  | Set of 25 JJ-0032 extension connectors for cables |
| 10–32 UNF (Female) to BNC (Male)         | JP-0145  | Plug adaptor                                      |
| 10–32 UNF (Female) to BNC (Male)         | UA-0245  | Adaptor   |
| 10–32 UNF (Female) to TNC (Male)         | JP-0162  | Plug adaptor                                      |
| B&K 10–32 UNF (Male) to BNC (Female)     | UA-1555  | Adaptor   |
| 10–32 UNF (Female) to SMB (Female)       | WA-1705  | Plug adaptor                                      |
| 2-pin TNC (Female) to 10–32 UNF (Female) | JJ-0207  | Plug adaptor                                      |
| 2-pin TNC (Male) to 10–32 UNF (Female)   | WA-0214  | Plug adaptor for AO-0250                          |
| Solder pin 10–32 UNF                     | JP-0192  | Solder connector adaptor                          |
| BNC to BNC                               | JJ-0152  | “T” connector, 1 male and 2 female connectors     |
| TNC to TNC                               | JJ-0175  | Extension connector                               |
| B&K Coaxial to 10–32 UNF (Female)        | JP-0028  | Input adaptor                                     |
| B&K Coaxial to BNC (Female)              | JP-0144  | Adaptor   |





# Raw Cables

Illustrations of the individual cables follow – see the referenced figure number in the table.

Some of the more unfamiliar jacket materials used are explained here:

- **PTFE:** Insulation and sheathing material. Can be used for many high-temperature applications such as gas turbines, high-voltage applications and many aerospace applications including use in vacuum environment
- **PFA:** Insulation and sheathing material. Can be used for high-temperature industrial applications such as gas turbines. Low halogen
- **ETFE:** Insulation and sheathing material, chemically resistant, flame retardant, low smoke generation. Ideal for all round, general purpose use and radiation environment

- **FEP:** Good insulation material for cable jacket. It has excellent non-ageing characteristics and a broad useful temperature range
- **PE:** Insulation, dielectric (LDPE) or jacket material (HDPE). This material is light, tough, permanently flexible, has good resistance to chemicals, non-oxidising acids and aromatic solvents, a low moisture absorption and good tensile and tear strength
- **PVC:** Insulation or jacket material which exhibits the property of high electrical resistivity, good dielectric strength, excellent mechanical toughness, superior resistance against oxygen, ozone, most common acids, alkalis and chemicals. Flame resistance, oil resistance and the temperature range depend on the compound
- **PUR:** Extruded jacket. Exhibits extreme toughness and abrasion resistance

## Raw Coaxial Cables for Piezoelectric and CCLD Accelerometers

| Item No.             | Description                    | Insulator/<br>Jacket | Screen | Number of<br>Wires | Diameter |        | Max. Temp |      | Min. Temp |      | Capacitance<br>pF/m | Impedance<br>Ω |
|----------------------|--------------------------------|----------------------|--------|--------------------|----------|--------|-----------|------|-----------|------|---------------------|----------------|
|                      |                                |                      |        |                    | mm       | inches | °C        | °F   | °C        | °F   |                     |                |
| AC-0005<br>(Fig. 28) | Super low noise                | PTFE/PFA             | Single | 1                  | 2        | 0.08   | +250      | +482 | -75       | -103 | 106                 | 60             |
| AC-0066<br>(Fig. 29) | Low noise                      | PTFE/PFA             | Single | 1                  | 1        | 0.04   | +250      | +482 | -75       | -103 | 106                 | 50             |
| AC-0104<br>(Fig. 30) | Low noise                      | PTFE/PFA             | Double | 1                  | 1.6      | 0.06   | +250      | +482 | -50       | -58  | 100                 | 50             |
| AC-0195              | Flexible low outgassing, white | FEP/PTFE             | Single | 1                  | 1.70     | 0.06   | +150      | +302 | -65       | -85  |                     |                |
| AC-0200<br>(Fig. 31) | Super low noise                | PTFE/PFA             | Double | 1                  | 3.2      | 0.13   | +250      | +482 | -75       | -103 | 106                 | 60             |
| AC-0205<br>(Fig. 32) | Super low noise                | PTFE/PFA             | Single | 1                  | 1.5      | 0.06   | +250      | +482 | -75       | -103 | 110                 | 50             |
| AC-0208<br>(Fig. 33) | Flexible, grey                 | PE/PVC               | Single | 1                  | 2        | 0.08   | +70       | +158 | -20       | -4   | 100                 | 50             |
| AC-0220<br>(Fig. 34) | Flexible                       | ETFE/PUR             | Single | 4                  | 2.4      | 0.09   | +90       | +194 | -75       | -103 | 106                 | 50             |
| AC-0223<br>(Fig. 35) | Flexible                       | ETFE/PTFE            | Single | 4                  | 2.1      | 0.09   | +250      | +482 | -75       | -103 | 106                 | 50             |
| AC-0080<br>(Fig. 36) | Spiral                         | PUR/PFA              | Single | 1                  | 14       | 0.55   | +85       | +185 | -40       | -40  | 100                 | 50             |

AC-0005

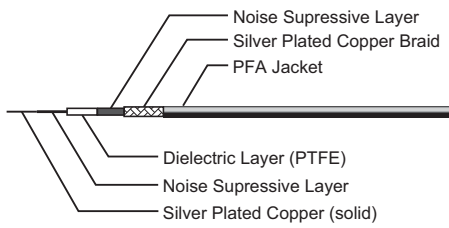


Fig. 28

AC-0066

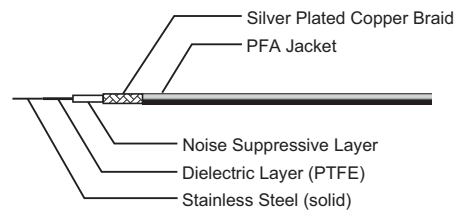


Fig. 29

AC-0104

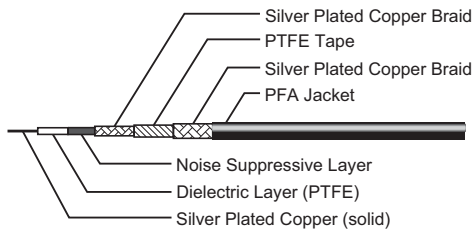


Fig. 30

AC-0200

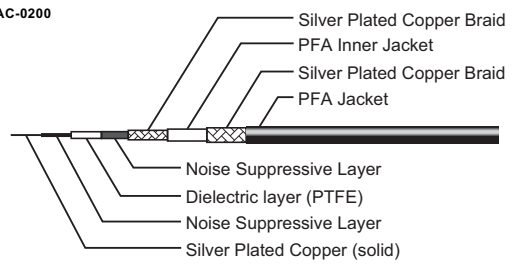


Fig. 31

AC-0205

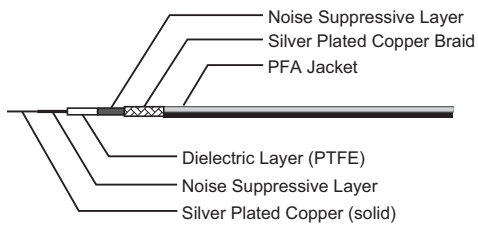


Fig. 32

AC-0208




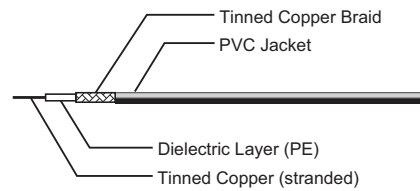


Fig. 33

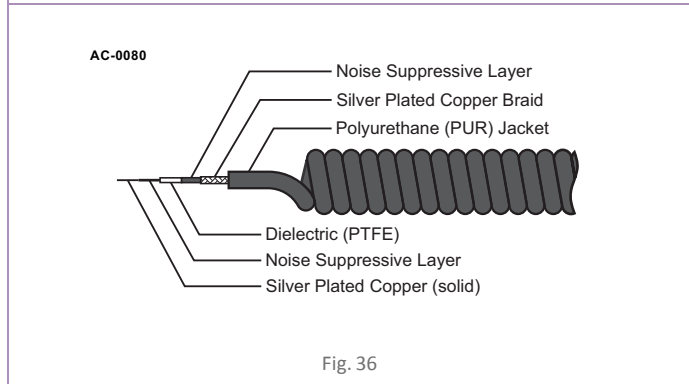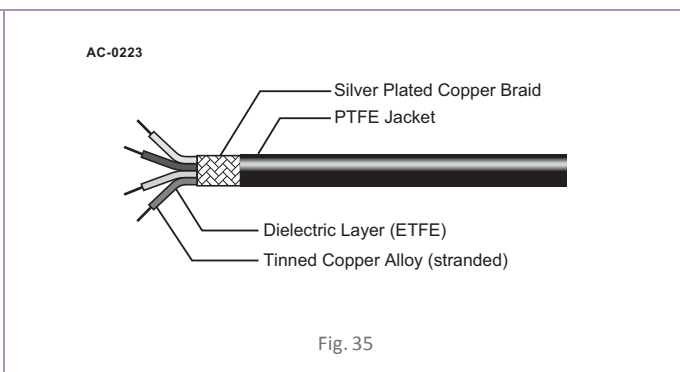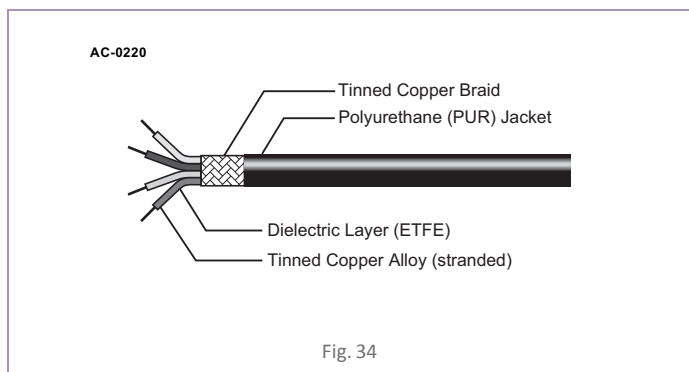

## Raw Cables for Conditioning Monitoring Accelerometers

| Item No.             | Description                       | Insulator/<br>Jacket | Screen | Number of<br>Wires | Diameter |        | Max. Temp          |                    | Min. Temp          |                    | Capacitance<br>pF/m | Impedance $\Omega$ |
|----------------------|-----------------------------------|----------------------|--------|--------------------|----------|--------|--------------------|--------------------|--------------------|--------------------|---------------------|--------------------|
|                      |                                   |                      |        |                    | mm       | inches | $^{\circ}\text{C}$ | $^{\circ}\text{F}$ | $^{\circ}\text{C}$ | $^{\circ}\text{F}$ |                     |                    |
| AC-0077<br>(Fig. 37) | For charge<br>types;<br>Low noise | PTFE/PFA, Black      | Double | 2                  | 6        | 0.24   | +250               | +482               | -55                | -67                | 106                 | 50                 |
| AC-0087<br>(Fig. 38) | For Charge<br>types;<br>Low noise | PTFE/PFA, Blue       | Double | 2                  | 6        | 0.24   | +250               | +482               | -55                | -67                | 105                 | 50                 |
| AC-0141<br>(Fig. 39) | General<br>purpose                | ETFE, ETFE<br>Black  | Double | 2                  | 6        | 0.24   | +125               | +257               | -40                | -40                | 135                 | 40                 |
| AC-0194<br>(Fig. 40) | General<br>purpose                | ETFE, ETFE Blue      | Double | 2                  | 6        | 0.24   | +125               | +257               | -40                | -40                | 135                 | 40                 |
| AC-0202<br>(Fig. 41) | Hardline                          | MgO                  | Single | 2                  | 3        | 0.12   | +600               | +1112              | -200               | -328               | N/A                 | N/A                |
| AC-0306<br>(Fig. 42) | Hardline                          | MgO                  | Double | 2                  | 4.8      | 0.19   | +600               | +1112              | -200               | -328               | N/A                 | N/A                |

AC-0077

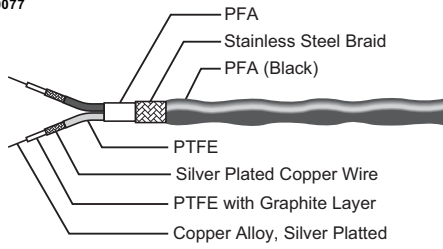


Fig. 37

AC-0087

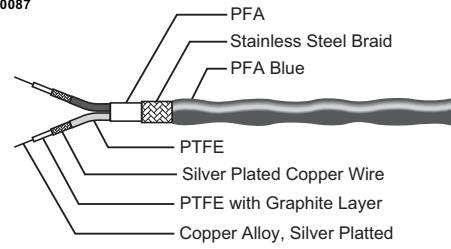


Fig. 38

AC-0141

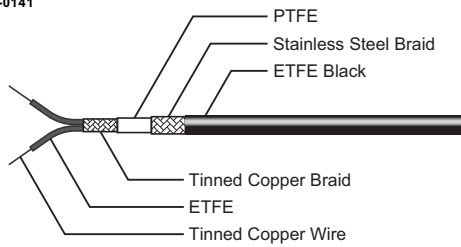


Fig. 39

AC-0194

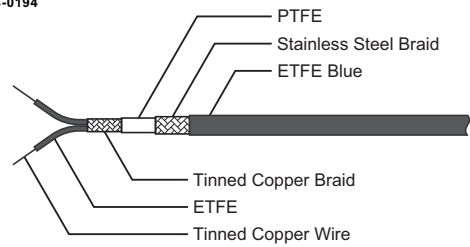


Fig. 40

AC-0202

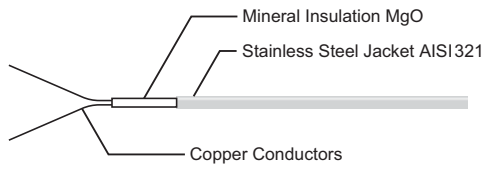


Fig. 41

AC-0306

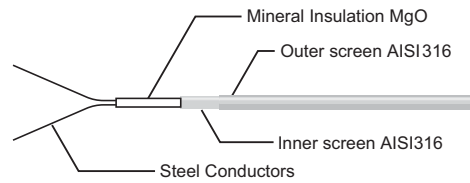


Fig. 42

# ACCELEROMETER CALIBRATION

The most important parameter for any measurement device is sensitivity. The sensitivity is the ratio of the output parameter to the input parameter (the measurand). To determine the sensitivity is to calibrate the device. For vibration transducers the output is normally charge (pC) or voltage with acceleration ( $m/s^2$  or g) or velocity (m/s or inch/s) as the input parameter.

Brüel & Kjær offers a range of instruments suited for calibration of shock and vibration transducers. The most commonly used are the

reference transducers used to make comparison calibrations according to ISO 16063–21 (formerly ISO 5347–3). Another solution is the automated Vibration Transducer Calibration System Type 3629 with different software options based on proven Brüel & Kjær's PULSE™ multi-analyzer technology. It provides fast and accurate magnitude and phase calibration according to ISO 16063–21. Primary magnitude and phase calibration according to ISO 16063–11 Method 3 is available using a commercial laser interferometer.

## Reference Accelerometers



| Type No.                          |                         | 8305                           | 8305-001   | 3506 (8305 and 2525)                               |
|-----------------------------------|-------------------------|--------------------------------|--|--|
| Nominal Sensitivity               | pC/ $ms^{-2}$<br>(pC/g) | 0.125<br>(1.23)                | 0.125<br>(1.23)  | 1 mV/ $ms^{-2}$ +30/-20 dB<br>(10 mV/g +30/-20 dB) |
| Frequency Range $\pm 10\%$ limits | Hz                      | 0.2 to 11500<br>with 20 g load | 0.2 to 10300   | 0.2 to 10300                                       |
| Transverse Sensitivity            | %                       | 2                              | 2  | 2  |
| Height                            | mm (in)                 | 29 (1.15)                      | 22.3 (0.88)  | 29 (1.15)  |
| Spanner Size                      |                         | 16 (0.63)                      | 16 (0.63)  | 16 (0.63)  |
| Weight                            | grams                   | 40                             | 26   | 40   |
| Thread, Top                       |                         | 10-32 UNF                      | None   | 10-32 UNF  |
| Thread, Bottom                    |                         | 10-32 UNF                      | 10-32 UNF  | 10-32 UNF  |
| Calibration Included              |                         |                                | DPLA* Primary Laser Calibration at 160 Hz<br>Uncertainty $\pm 0.5\%$<br>Frequency Response Curve |  |
| Max. Shock                        | $km/s^2$ (g)            |                                | 10 (1000)  |  |

\* DPLA is the Danish Primary Laboratory of Acoustics

# Calibrators and Calibration Systems



030104/1

|                                     |   |
|-------------------------------------|---|
| <b>Type No.</b>                     | <b>3629</b>   |
| <b>Description</b>                  | Vibration Transducer Calibration System<br>Comparison calibration according to ISO 16063–21. Very low expanded calibration uncertainty. Automated calibration provides ease of use, yet fault-proof results. Choice of random or sine excitation. Based on proven Brüel & Kjær PULSE technology |
| <b>Frequency Range</b>              | 0.1 Hz to 25 kHz (optionally 100 kHz depending on shaker and reference)   |
| <b>Calibrates</b>                   | Transducer types: Charge, CCLD (constant current), Piezoresistive, Variable Capacitance, Voltage, Servo and Electrodynamic<br>Charge conditioners using reference capacitor   |
| <b>Primary Calibration</b>          | According to ISO 16063–11 method 3 using commercial laser interferometer<br>(optional, requires Type 5309 software)   |
| <b>Typical Calibration Accuracy</b> | 3 to 2 kHz: 0.6%<br>2 to 5 kHz: 0.9%<br>5 to 7 kHz: 1.1%<br>7 to 10 kHz: 1.6%<br>(one point 0.5% reference calibration and including influence from the transducer to be calibrated)  |
| <b>Software Control</b>             | Vibration Transducer Calibration Software Type 5308   |
| <b>Additional</b>                   | Uses standard PC/laptop with Microsoft® Windows® and Microsoft® Office.<br>Customer database for handling of data and inventory following ISO 17025   |



|  |  |
|--|--|
| <b>Type No.</b>                        | <b>4294</b>  |
| <b>Description</b>                     | Calibration Exciter<br>Hand-held calibration exciter with built-in reference accelerometer and compressor loop |
| <b>Calibration Level</b>               | 10.0 m/s <sup>2</sup> rms ±3%<br>10.0 mm/s rms ±3%<br>10.0 μm rms ±3%  |
| <b>Calibration Frequency</b>           | 159.15 Hz ±0.02%   |
| <b>Maximum Load</b>                    | 70 g (2.4 oz)  |
| <b>Mounting Thread</b>                 | 10–32 UNF  |
| <b>Transverse Vibration</b>            | <5% of main axis   |
| <b>Distortion</b>                      | <2% (10 to 70 g load)<br><7% (0 to 10 g load)  |
| <b>Signal Duration</b>                 | 103 ±1 second with autostop  |
| <b>Battery Life</b>                    | >200 calibrations  |
| <b>Temperature Range</b>               | 10 to 40 °C (50 to 104 °F)   |
| <b>Weight</b>                          | 500 g, all included  |
| <b>Dimensions</b>                      | Length: 155 mm (6.1")<br>Diameter: 52 mm (2.05")   |
| <b>High-load Version Type 4294-002</b> | 3.16 m/s <sup>2</sup> ±3%, 200 g (7.1 oz) max. load  |

# Vibration and Shock Calibration Exciters



| Item No.                                |           | Type 4808                  | Type 4809                | WQ-2347 (APS 500) |
|---|-----------|----------------------------|--------------------------|-------------------|
| <b>Frequency Range</b>                  | Hz        | 5 to 10000                 | 10 to 20000              | 0.1 to 200        |
| <b>Max. Sine Force</b>                  | N peak    | 112 (187 with air cooling) | 44 (60 with air cooling) | 89                |
| <b>First Axial Resonance</b>            | kHz       | 10                         | 20                       | 0.2               |
| <b>Moving Element mass</b>              | gram      | 160                        | 60                       | 1100              |
| <b>Stroke</b>                           | mm, pk-pk | 12.7                       | 8                        | 155               |
| <b>Built-in Reference Accelerometer</b> |           | No                         | No                       | No                |

# Calibration Accessories

- WA-0567** Calibration Fixture and Adaptor Plates (WS-3104, etc.) for Type 4808
- 11-0684** 1 nF Precision Adaptor (used to calibrate charge amplifiers)

Secondary calibration systems from Brüel & Kjær are used not only in Brüel & Kjær service centres, but also by high-tech customers all over the world. Many Brüel & Kjær calibration systems are used by laboratories that have gained accreditation in accordance with ISO 17025 and the EN 45000 series.

For secondary accelerometer calibrations, Vibration Exciter Type 4808 is typically part of the calibration system.







# SIGNAL CONDITIONING

## Multi-pin Signal Conditioners for Microphones

Multi-pin preamplifiers cover the widest range of acoustic applications. Signal conditioners condition the microphone signals from the microphone preamplifiers. In this case, you must take into account the preamplifier's supply voltage. For very high sound pressure level measurements, the conditioner's supply voltage may limit the measurement system's maximum measurable level. The maximum measurable sound pressure level is a function of several parameters:

- Frequency content of the sound
- Sensitivity of microphone (including influence of polarization voltage for externally polarized microphones)
- Preamplifier's voltage drop
- Capacitance of cable between preamplifier and conditioner
- Supply voltage and current from conditioner
- Gain or attenuation in conditioner or preamplifier
- Peak input range of data acquisition



| Type No.  | 2250                          | 2829                   | 5935-L                 | 2690-A                       | 2691-A                                     |
|---|-------------------------------|------------------------|------------------------|------------------------------|--|
| <b>Description</b>                                  | Hand-held Analyzer            | Microphone Conditioner | Microphone Conditioner | NEXUS Microphone Conditioner | NEXUS (Single Probe) Intensity Conditioner |
| <b>Channels Min./Max.</b>                           | 1                             | 4                      | 2                      | 1/4                          | 2  |
| <b>Preamplifier Supply Voltage</b>                  | ±18                           | ±50                    | 24                     | ±14 and ±40                  | ±14 and ±40                                |
| <b>Polarization Control</b>                         | 0 and 200 V                   | 0 and 200 V            | 0, 28 and 200 V        | 0 and 200 V                  | 0 and 200 V                                |
| <b>Manual Control</b>                               | Yes                           | No                     | Yes                    | Yes                          | Yes  |
| <b>Computer Control</b>                             | Yes                           | No                     | No                     | Yes                          | Yes  |
| <b>Maximum Number of Channels from One PC</b>       | Multiple from USB or LAN port | –                      | –                      | 99 per COM or USB port       | 99 per COM or USB port                     |
| <b>CIC</b>  | No                            | Via external connector | Via external connector | No                           | No   |
| <b>Maximum Frequency</b> (kHz at filters –5% point) | 20                            | –                      | 100                    | 100                          | 100  |
| <b>A-weighting</b>                                  | Yes                           | No                     | Yes                    | Yes                          | Yes  |
| <b>B-, C- and D-weighting</b>                       | Yes (B- and C-)               | No                     | No                     | Optional                     | No   |
| <b>Adjustable Filters</b>                           | No                            | No                     | No                     | Yes                          | Yes  |
| <b>Alarms</b>                                       | Yes                           | –                      | –                      | –                            | –  |
| <b>Maximum Gain</b>                                 | × 1000 (60 dB)                | –                      | × 316 (50 dB)          | × 10000 (80 dB)              | × 10000 (80 dB)                            |
| <b>Minimum Gain</b>                                 | × 0.01 (–60 dB)               | × 1 (0 dB)             | × 1 (0 dB)             | × 0.1 (–20 dB)               | × 0.1 (–20 dB)                             |
| <b>Uni (Fine) Gain Adjustment</b>                   | Yes                           | No                     | Yes                    | Yes, automatic from TEDS     | Yes, automatic from TEDS                   |
| <b>Reads TEDS</b>                                   | No                            | Via external connector | No                     | Yes                          | Yes  |
| <b>Channels per 19" Rack</b>                        | –                             | –                      | 6                      | 12                           | 12   |
| <b>Mains (AC) Power</b>                             | Yes                           | Yes                    | Yes                    | Yes                          | Yes  |
| <b>Battery Power</b>                                | Yes                           | No                     | Yes                    | Optional                     | Optional                                   |

# CCLD Signal Conditioners for Microphones and Accelerometers

Constant Current Supply (mA) – called CCLD – conditioning is used on a wide range of transducers including accelerometers, microphones, and tacho probes. CCLD is not a standardized system. Some CCLD transducers, like CCLD Laser Tacho Probe Type 2981, require more current for power than can be sourced from some CCLD conditioners.

$$L = 140000 \times \frac{I_s - 1}{f \times V_o \times C_m}$$

where:

$I_s$  = supply current (mA)

$f$  = frequency (kHz)

$V_o$  = output voltage ( $V_{peak}$ )

$C_m$  = cable capacitance (pF/m)

Current is also one of the parameters related to a CCLD system's maximum frequency range. Use the supply current from the following equation:



| Type No.   | 2250                          | 2525  | 2693-A                        | 2694-A                  |
|--|-------------------------------|---|-------------------------------|-------------------------|
| <b>Description</b>   | Hand-held Analyzer            | Measuring Amplifier                           | NEXUS CCLD Signal Conditioner | CCLD Signal Conditioner |
| <b>Channels Min./Max.</b>  | 1                             | 1   | 1/4                           | 16                      |
| <b>Constant Current Supply (mA)</b>  | 4                             | 4   | 4 or 10                       | 6                       |
| <b>AC Acceleration Output</b>  | Yes                           | Yes   | Yes                           | Yes                     |
| <b>AC Velocity &amp; Displacement Output</b> (single and double integration filters) | No                            | Yes   | Optional                      | Optional                |
| <b>DC RMS Output</b>   | Yes                           | Yes   | No                            | No                      |
| <b>DC Peak Output</b>  | No                            | Yes   | No                            | No                      |
| <b>Alarms</b>  | Yes                           | Yes   | No                            | No                      |
| <b>Manual Control</b>  | Yes                           | Yes   | Yes                           | No                      |
| <b>Computer Control</b>  | Yes                           | Yes   | Yes                           | Yes                     |
| <b>Maximum Number of Channels from One PC</b>  | Multiple from USB or LAN port | 1 per COM or USB port<br>15 per IEEE 488 port | 99 per COM or USB port        | 256 per COM or USB port |
| <b>Multiplexer Output*</b>   | No                            | No  | No                            | Yes                     |
| <b>Maximum Frequency</b> (kHz at filters –5% point)                                  | 20                            | 100 (–20%)                                    | 100 (–10%)                    | 50 (–10%)               |
| <b>Minimum Frequency</b> (Hz at filters –5% point)                                   | 1.5                           | 0.2 (–10%)                                    | 0.1 (–10%)                    | 0.1 (–10%)              |
| <b>A-weighting</b>   | Yes                           | No  | Yes                           | Optional                |
| <b>B-, C- and D-weighting</b>  | Yes (B- and C-)               | No  | Optional                      | No                      |
| <b>Adjustable Filters</b>  | No                            | Yes   | Yes                           | Yes                     |
| <b>Maximum Gain</b>  | × 1000 (60 dB)                | × 10000 (80 dB)                               | × 10000 (80 dB)               | × 100 (40 dB)           |
| <b>Minimum Gain</b>  | × 0.001 (–60 dB)              | × 0.1 (–20 dB)                                | × 0.1 (–20 dB)                | × 0.316 (–10 dB)        |
| <b>Uni (Fine) Gain Adjustment</b>  | Yes                           | Yes   | Yes, automatic from TEDS      | No                      |
| <b>Reads TEDS</b>  | No                            | No  | Yes                           | Yes                     |
| <b>Channels per 19" Rack Mount</b>   | –                             | 3   | 12                            | 16                      |
| <b>Mains (AC) Power</b>  | Yes                           | Yes   | Yes                           | Yes                     |
| <b>Power from PC's USB Port</b>  | Yes                           | No  | No                            | No                      |
| <b>Battery Power</b>   | Yes                           | No  | No                            | No                      |

\* For multichannel tests, a multiplexer or computer-controlled switch can reduce the number of data acquisition channels required for time-invariant or stationary systems.



| Item No.   | Type 1704-A             | Type 1704-C-102         | WB-1372                 | WB-1453                 |
|--|-------------------------|-------------------------|-------------------------|-------------------------|
| <b>Description</b>   | CCLD Signal Conditioner | CCLD Signal Conditioner | CCLD Signal Conditioner | CCLD Signal Conditioner |
| <b>Channels Min./Max.</b>  | 1/2                     | 2                       | 1                       | 3                       |
| <b>Constant Current Supply (mA)</b>  | 3 – 4.1                 | 3 – 4.1                 | 3                       | 3                       |
| <b>AC Acceleration Output</b>  | Yes                     | Yes                     | Yes                     | Yes                     |
| <b>AC Velocity &amp; Displacement Output</b> (single and double integration filters) | No                      | No                      | No                      | No                      |
| <b>DC RMS Output</b>   | No                      | No                      | No                      | No                      |
| <b>DC Peak Output</b>  | No                      | No                      | No                      | No                      |
| <b>Alarms</b>  | No                      | No                      | No                      | No                      |
| <b>Manual Control</b>  | Yes                     | Yes                     | No                      | No                      |
| <b>Computer Control</b>  | No                      | No                      | No                      | No                      |
| <b>Maximum Number of Channels from One PC</b>  | –                       | –                       | –                       | –                       |
| <b>Multiplexer Output*</b>   | No                      | No                      | No                      | No                      |
| <b>Maximum Frequency</b> (kHz at filters –5% point)                                  | 55                      | 55                      | 25                      | 25                      |
| <b>Minimum Frequency</b> (Hz at filters –5% point)                                   | 2.2                     | 2.2                     | 0.1                     | 0.1                     |
| <b>A-weighting</b>   | Yes                     | No                      | No                      | No                      |
| <b>B-, C- and D-weighting</b>  | No                      | No                      | No                      | No                      |
| <b>Adjustable Filters</b>  | Yes                     | Yes                     | × 1 (0 dB)              | No                      |
| <b>Maximum Gain</b>  | × 100 (40 dB)           | × 100 (40 dB)           | × 1 (0 dB)              | –                       |
| <b>Minimum Gain</b>  | × 1 (0 dB)              | × 1 (0 dB)              | –                       | × 1 (0 dB)              |
| <b>Uni (Fine) Gain Adjustment</b>  | No                      | No                      | No                      | No                      |
| <b>Reads TEDS</b>  | No                      | No                      | No                      | No                      |
| <b>Channels per 19" Rack Mount</b>   | –                       | –                       | –                       | –                       |
| <b>Mains (AC) Power</b>  | Yes                     | Yes                     | No                      | No                      |
| <b>Power from PC's USB Port</b>  | Yes                     | Yes                     | Yes                     | No                      |
| <b>Battery Power</b>   | Yes                     | No                      | Yes                     | Optional                |

\* For multichannel tests, a multiplexer or computer-controlled switch can reduce the number of data acquisition channels required for time-invariant or stationary systems.

# Charge Signal Conditioners for Accelerometers

Charge accelerometers offer the greatest flexibility in regards to temperature and dynamic range. Within this group you have either single-ended or differential charge accelerometers. Single-ended accelerometers are used in many applications, while differential accelerometers offer improved immunity to noise and ground loops. Signal conditioners are usually compatible with one or the other, in rare cases, the conditioner can be used with both types of accelerometer.

## Maximum Charge Input

For applications where shocks and impulses occur such as gas turbines and munitions, the conditioner's maximum charge input may limit the measurement system's maximum measurable level. The maximum measurable acceleration level is a function of several parameters:

- Frequency content of the signal
- Sensitivity of accelerometer
- Capacitance of cable between accelerometer and conditioner
- Gain or attenuation in conditioner or preamplifier
- Peak input range of data acquisition



| Type No.   | 1702                                | 1705                              | 2525  | 2634             | 2663/2663-B      |
|--|-------------------------------------|-----------------------------------|---|------------------|------------------|
| <b>Description</b>   | Range of Airborne Charge Amplifiers | Range of Airborne CCLD Amplifiers | Measuring Amplifier                           | Charge Amplifier | Charge Amplifier |
| <b>Channels Min./Max.</b>  | 1                                   | 1                                 | 1   | 1                | 1                |
| <b>Single-ended Charge</b>   | Yes                                 | –                                 | Yes   | Yes              | Yes              |
| <b>Differential Charge</b>   | No                                  | No                                | No  | Yes              | Yes              |
| <b>Maximum Charge Input</b>  | –                                   | –                                 | 50000 pC                                      | ~1000 pC         | 5000 pC peak     |
| <b>AC Acceleration Output</b>  | Yes                                 | Yes                               | Yes   | Yes              | Yes              |
| <b>AC Velocity &amp; Displacement Output</b> (single and double integration filters) | No                                  | No                                | Yes   | No               | NO               |
| <b>RMS and Peak Outputs</b>  | No                                  | No                                | Yes   | No               | No               |
| <b>Alarms</b>  | No                                  | No                                | Yes   | No               | No               |
| <b>Manual Control</b>  | Yes                                 | Yes                               | Yes   | Yes              | No               |
| <b>Computer Control</b>  | No                                  | No                                | Yes   | No               | No               |
| <b>Maximum Number of Channels from One PC</b>  | –                                   | –                                 | 1 per COM or USB port<br>15 per IEEE 488 port | –                | –                |
| <b>Maximum Frequency</b> (kHz at filters –5% point)                                  | 5                                   | 5                                 | 100 (–20%)                                    | >200 (–3 dB)     | 200              |
| <b>Minimum Frequency</b> (Hz at filters –5% point)                                   | 5                                   | 1.2                               | 0.2 (–10%)                                    | 1 (–3 dB)        | 0.5 (–3 dB)      |
| <b>Adjustable Filters</b>  | No                                  | No                                | Yes   | No               | Optional         |
| <b>Maximum Gain</b>  | × 50 (14 dB)                        | –                                 | × 10000 (80 dB)                               | × 10 (20 dB)     | × 100 (40 dB)    |
| <b>Minimum Gain</b>  | × 0.5 (–6 dB)                       | –                                 | × 0.1 (–20 dB)                                | × 1 (0 dB)       | × 1 (0 dB)       |
| <b>Uni (Fine) Gain Adjustment</b>  | Yes                                 | Yes                               | Yes   | No               | No               |
| <b>Channels per 19" Rack Mount</b>   | –                                   | –                                 | 3   | –                | –                |
| <b>Mains (AC) Power</b>  | No                                  | No                                | Yes   | No               | No               |
| <b>DC Power</b>  | Yes                                 | Yes                               | No  | Yes              | Yes              |
| <b>Battery Power</b>   | No                                  | No                                | No  | No               | No               |



| Type No.   | 2635             | 2692-A                 | 2692-C                                   |
|--|------------------|------------------------|--|
| <b>Description</b>   | Charge Amplifier | NEXUS Charge Amplifier | NEXUS Charge Amplifier (very high input) |
| <b>Channels Min./Max.</b>  | 1                | 1/4                    | 1/4                                      |
| <b>Single-ended Charge</b>   | Yes              | Yes                    | Yes                                      |
| <b>Differential Charge</b>   | No               | No                     | No                                       |
| <b>Maximum Charge Input</b>  | ~10000 pC        | 10000 pC               | 100000 pC                                |
| <b>AC Acceleration Output</b>  | Yes              | Yes                    | Yes                                      |
| <b>AC Velocity &amp; Displacement Output</b> (single and double integration filters) | Yes              | Optional               | Optional                                 |
| <b>RMS and Peak Outputs</b>  | No               | No                     | No                                       |
| <b>Alarms</b>  | No               | No                     | No                                       |
| <b>Manual Control</b>  | Yes              | Yes                    | Yes                                      |
| <b>Computer Control</b>  | No               | Yes                    | Yes                                      |
| <b>Maximum Number of Channels from One PC</b>  | –                | 99 per COM or USB port | 90 per COM or USB port                   |
| <b>Maximum Frequency (kHz at filters –5% point)</b>                                  | 200              | 100 (–10%)             | 100 (–10%)                               |
| <b>Minimum Frequency (Hz at filters –5% point)</b>                                   | 0.2              | 0.1 (–10%)             | 0.1 (–10%)                               |
| <b>Adjustable Filters</b>  | Yes              | Yes                    | Yes                                      |
| <b>Maximum Gain</b>  | × 10000 (80 dB)  | × 10000 (80 dB)        | × 10000 (80 dB)                          |
| <b>Minimum Gain</b>  | × 0.01 (–40 dB)  | × 0.1 (–20 dB)         | × 0.1 (–20 dB)                           |
| <b>Uni (Fine) Gain Adjustment</b>  | Yes              | Yes                    | Yes                                      |
| <b>Channels per 19" Rack Mount</b>   | 6                | 12                     | 12                                       |
| <b>Mains (AC) Power</b>  | Yes              | Yes                    | Yes                                      |
| <b>DC Power</b>  | No               | Yes                    | Yes                                      |
| <b>Battery Power</b>   | Yes              | Optional               | Optional                                 |



| Type No.   | 2647-A                             | 2647-B | 2647-C | 2647-D | 2647-D-001 | 2647-D-002 | 2647-D-003 | 2647-D-004 | 2647-D-005 | 2647-E |
|--|------------------------------------|--------|--------|--------|------------|------------|------------|------------|------------|--------|
| <b>Description</b>                                 | Range of Charge to CCLD Converters |        |        |        |            |            |            |            |            |        |
| <b>Gain (mV/pC)</b>                                | 1                                  | 10     | 0.1    | 1      | 1          | 1          | 1          | 1          | 1          | 5      |
| <b>Lower Limiting Frequency (Hz) (–10%, –1 dB)</b> | 0.17                               | 0.17   | 1.0    | 1.0    | 1.0        | 80         | 80         | 80         | 1          | 0.17   |
| <b>Upper Limiting Frequency (kHz)(–10%, –1 dB)</b> | 50                                 | 50     | 10*    | 10*    | 10*        | 10*        | 10*        | 10*        | 10*        | 50     |
| <b>Cable Integrated</b>                            | No                                 | No     | No     | No     | Yes        | No         | Yes        | Yes        | Yes        | No     |
| <b>Connector A (to transducer)</b>                 | 10–32 UNF                          |        |        |        | 2-pin TNC  | 10–32 UNF  | 2-pin TNC  | 2-pin TNC  | 10–32 UNF  |        |
| <b>Connector B (to front end)</b>                  | 10–32 UNF                          |        |        |        | BNC (F)    | 10–32 UNF  | BNC (F)    | LEMO       | LEMO       |        |

\* Depends on input load capacitance. Values apply to 1.5 nF (for example, 1 nF accelerometer capacitance plus 5 m cable)

# What are the Benefits of Signal Conditioning?

Signal conditioning improves the performance and reliability of the measurement system with a variety of functions such as signal amplification, attenuation, electrical isolation, filtering, powering of your transducers, overload detection and Transducer Electronic Data Sheet (TEDS) support.

Brüel & Kjær provides a number of signal conditioning solutions. When determining which conditioner to use, you should consider the type of transducer as well as the conditioner's benefits to the measurement system, including the following critical features and characteristics. For further comparisons, see the individual conditioner's product data for in-depth specifications.

## Number of Channels

For multichannel tests, having more channels in the signal conditioner makes for a simpler system (for example, one power supply or battery for all the conditioned channels).

## Channel Control

For units with adjustable settings, manual control is the easiest way to change configuration. In automated or multichannel systems, computer control offers big time savings.

For very large systems, it is desirable to control as many channels as possible from a single PC.

## Maximum and Minimum Frequency and Adjustable Filters

Besides needing to cover the measurement's frequency range, a conditioner's analogue filter can remove portions of the signal outside the range of interest. For example, in-vehicle measurements of sound often have very strong low-frequency content below 20 Hz. A 20 Hz high-pass filter will attenuate the signal below the audio range which may improve the measurement system's noise floor at mid to high frequencies.

## Minimum and Maximum Gain

When using data acquisition equipment with adjustable input ranges, the noise floor of the complete measurement system (from transducer through conditioning to data acquisition) can be improved by adding gain in the conditioner.

## Uni (Fine) Gain Adjustment

The sensitivity of a transducer in engineering units or volts typically varies significantly between individual transducers. Compensating for the individual sensitivities using fine gain control in the conditioner removes this error.

## Transducer Electronic Data Sheet (TEDS)

Significant measurement errors can be automatically avoided when the fine gain adjustment of the conditioner is read from the transducer's built-in Transducer Electronic Data Sheets (TEDS).

A TEDS microphone is sealed to the preamplifier with a calibration sticker



## Multi-unit Design

Rack mounting is a convenient way of organizing laboratory-based measurement systems where all the conditioning and data acquisition can be combined into one frame. For most signal conditioners, you can order an optional 19-inch rack and/or a multi-unit frame, with which one or more conditioner can be mounted.

## Other Useful Features for Acoustic Transducers

### Polarization Control


The working principle of the condenser microphone is based on a fixed charge. This charge is established, either with a very stable external polarization voltage, typically 200 V, via a large resistor, or by an electret layer deposited on the microphone's backplate, in which case the external polarization voltage should be set to 0 V.

### CIC

Charge Injection Calibration (CIC) is a technique for on-line verification of the integrity of the entire measurement chain, for example, microphone, preamplifier and cabling. Even microphones remote from the input stage/conditioning amplifier can be verified. The basic philosophy behind CIC is that if we have a known condition (for example, a properly calibrated microphone) and establish a reference measurement, then as long as the reference value does not change, nothing has changed, for example, the microphone calibration will still be valid. Additionally CIC verifies the cable and preamplifier.


## Filtering

Acoustic weighting curves

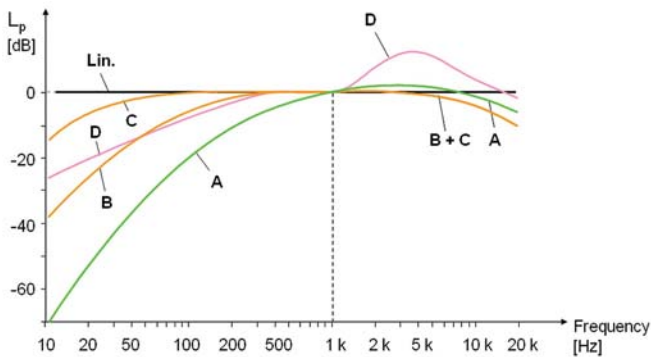

- **A-weighting Filters:** Sound measurements often specify A-weighting to reflect the acuity of the human ear, which does not respond equally to all frequencies. Using analogue A-weighting filters can also have the same benefit of improving the measurement system's noise floor at mid to high frequencies for in-vehicle measurements.
- **B-, C-, and D-weighting Filters:** Sound measurements can also specify B-, C- or D-weighting instead of the more common A-weighting. These additional weightings also reflect the acuity of the human ear, which does not respond equally to all frequencies, but also has a different response at different sound pressure levels.

Example of the benefits of analogue filtering for in-vehicle measurements

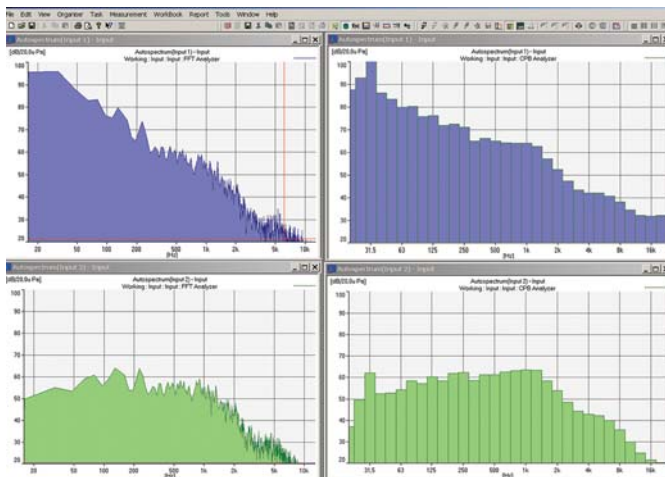


## Other Useful Features for Vibration Transducers

### AC Acceleration Output

This is the "raw time" output from an accelerometer through any gain and filtering in the conditioner.

Analogue velocity and acceleration filters

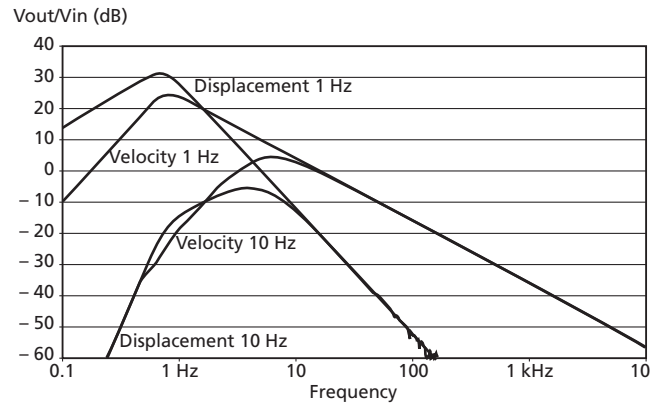

### AC Velocity and Displacement Output (Single- and Double-integration Filters)

In some measurements, such as machine health monitoring according to ISO 10816, the velocity or displacement is of more interest than the acceleration from an accelerometer. A single and double integration filter easily converts an acceleration signal to velocity or displacement in the time domain.

Converting to velocity or displacement in the conditioner makes further analysis easier.

### DC RMS and Peak Outputs and Alarms

Some analysis techniques use averaged (RMS) or Peak measurements instead of the "raw time" signal. Conditioners with this capability are often called "measuring amplifiers" because they provide the needed measured parameter without need for additional instrumentation. Besides being displayed on the unit's screen, the averaged (RMS) or Peak values can be sent to other measurement devices as a DC voltage. A TTL alarm output can be sent from the measuring amplifier when a limit is exceeded.





# CALIBRATION SYSTEMS

## Primary Calibration Systems

### Microphone Reciprocity Calibration System



Reciprocity Calibration System Type 9699 performs reciprocity calibration according to the method described in IEC 61094–2 to determine the pressure sensitivity of microphones described in IEC 61094–1 (Laboratory Standard Microphones).

This system is intended for National Metrology Institutes and other high-level laboratories. It is a turnkey system for routine measurements that can be set up to meet the requirements of the user. The system can work in a “normal” laboratory environment with no specific precautions with respect to background noise and vibration.

It is a very flexible system that can be used for calibration research and at primary calibration laboratories, calibration service centres and larger organisations with their own calibration facilities.

### Vibration Transducer Calibration System

Vibration Transducer Calibration System Type 3629 together with Laser-interferometric Calibration System Software Type 5309 are designed for absolute calibration of a variety of vibration and shock transducers. The combined system is generally used by national primary laboratories or as reference by clients utilising advanced technology.

The system performs absolute calibration according to the method described in ISO 16063–11:1999. Type 5309 uses Method 3, sine approximation, and calibrates practically all transducer types: charge, CCLD (constant current supplied transducers), piezoresistive, variable capacitance, voltage, servo and electrodynamic (for example, velocity pick-ups).

### Hydrophone Calibration System

Hydrophone Calibration System Type 9718 performs free-field calibration in a water tank as described in IEC 60565.

The system is generally used by national primary laboratories or as reference by clients utilising advanced technology for calibration of underwater transducers both at the primary and secondary level.

Secondary calibration used by laboratories who need to calibrate large numbers of hydrophones with minimum time consumption, is based on the substitution principle and performed in two steps:

- First: A calibration is performed by means of a known reference hydrophone
- Second: A calibration is performed with the unknown unit under calibration


The measurement principle used is gated selective FFT for optimum signal-to-noise ratio. The complex impedance can also be measured and reported.

The reciprocity system can perform calibration without use of a reference transducer, this is called absolute calibration. The reciprocity calibration is used for calibration of such reference transducers.

### Directivity Calibration Software

The directivity calibration software option complements Hydrophone Calibration System Type 9718. The hydrophone to be calibrated is mounted on Turntable Type 9640 capable of handling payloads up to 100 kg. A rotation controller turns the turntable and provides accurate information of the angle. For each angle, the hydrophone output is measured and printed in a polar plot. The polar plot may be repeated at different frequencies as needed.

Overview of Brüel & Kjær’s calibration system products

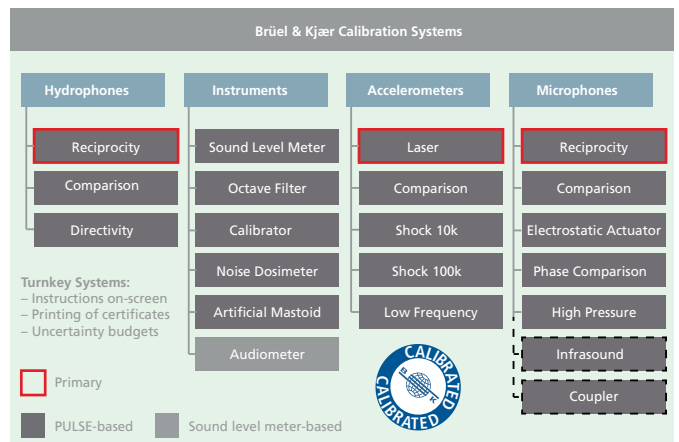

# Secondary Calibration Systems

## Shock and Vibration Transducer System Type 3629



### With Comparison Calibration System Software Type 5308

The system performs comparison calibration according to the method described in ISO 16063–21:2003.

Vibration Transducer Calibration System Type 3629 and Type 5308 software are designed for comparison calibration of a variety of vibration and shock transducers and is generally used by calibration service centres and larger organisations with their own calibration facilities.

Type 3629 calibrates practically all transducer types – charge, CCLD (constant current supplied transducers), piezoresistive, variable capacitance, voltage, servo and electrodynamic (for example, velocity pick-ups).

### With Shock Transducer Calibration Software Type 5310

The calibration is performed in accordance with ISO 16063–22.

This system is normally used with a POP shock calibrator that works at shock levels from 20 to 10000 g and shares a number of user interface features and components with Comparison Calibration Software Type 5308. For shocks below 100 g it is even possible to use a special feature to generate them on a shaker.

## High-shock Transducer Calibration

The calibration is performed in accordance with ISO 16063–22 using High Shock Transducer Calibration Software Type 5311.

It is normally used with a Hopkinson Bar that works at shock levels from 10 to 100 kg and shares a number of user interface features and components with Comparison Calibration Software Type 5308.

## Microphone Calibration System Type 9721



Microphone Calibration System Type 9721 can calibrate measurement and laboratory standard microphones of commonly used models and brands, including those that fulfil IEC standards 61094–4 (Working Standards) and 61094–1 (Laboratory Standards). Microphones of non-standard dimensions can also be calibrated, but might require additional mechanical accessories.

Type 9721 is a general-purpose microphone calibration system that calibrates microphones with or without preamplifiers in accordance with IEC 61094–5 and IEC 61094–6.

The system is intended for calibration service centres and larger organisations with their own calibration facilities. It is a flexible, turnkey system for routine measurements that can be set up to meet the requirements of the user. The system can work in a “normal” laboratory environment with no specific precautions with respect to background noise and vibration.

### Option:

- Phase Response Comparison Calibration with Application Software WT-9651 and coupler WA-1544 or WA-1545

# BRÜEL & KJÆR SERVICE

In order to provide you with a Best in Class customer service experience, we continuously expand the Brüel & Kjær offerings and improve our internal processes to ensure the same standards around the globe.

## Single Point of Contact

This speeds up your enquires, by connecting you to the right contact the very first time! The multilingual Global Customer Care

organization is eager to assist you in every request you may have. Our customer-friendly team will submit your request for calibration, track your order end-to-end, and inform you proactively about status and delivery schedule. If you need to receive technical support, they will route you to the dedicated contact.

## What You Gain When You Partner with Brüel & Kjær

### Expert Calibration

Your equipment will be expertly calibrated and repaired in Brüel & Kjær accredited calibration centres. The Global Product Care team is regularly trained and certified to perform factory calibrations and repairs of instrumentation to ensure the same high standards as new equipment.

### Knowledgeable Service


Global Field Service engineers are at your disposal when it comes to on-site field services including installation, system configuration, fault resolution, calibration and preventative maintenance of your

entire systems. A range of services accompany the solution to reduce the risk of faults occurring during use. We know our products best!

### Team of Specialists

The local teams are supported by a global group of engineering specialists who can advise on and solve all kinds of sound and vibration measurement and analysis problems you might have. Professional Project Management and Engineering Test Services combined with experienced Technical Support ensure smooth operation of your solution and provide additional value to you.

Brüel & Kjær Global Product Care centres

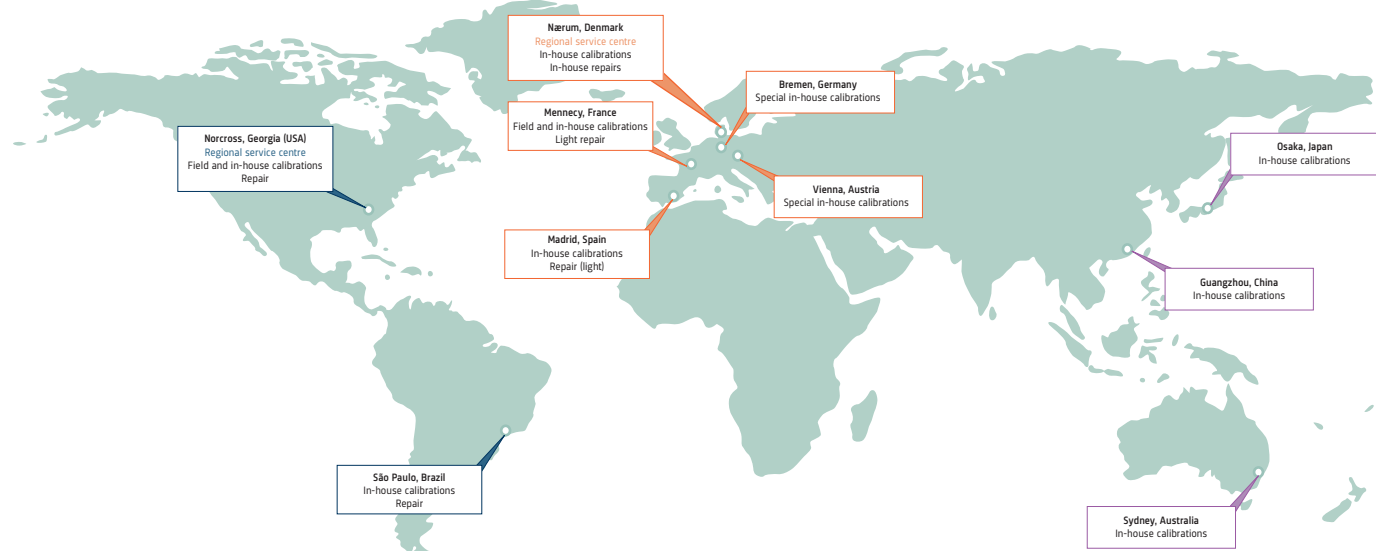

# Brüel & Kjær Calibration and Repair Services

Brüel & Kjær's 10 calibration centres perform more than 30,000 high-level, quality calibrations a year. The global team of highly skilled calibration technicians:

- Maintain an intimate knowledge of all Brüel & Kjær branded products
- Excel at carrying out a wide range of calibrations run on dedicated test benches
- Deliver complete calibration schedules

The calibration centres can also calibrate other manufacturer's equipment.

## Calibration of Reference Equipment

There are two levels of reference calibration available at Brüel & Kjær: Primary Calibration – performed by Danish Primary Laboratory of Acoustics (DPLA) – and Secondary Calibration. The level you select depends on the accuracy you require for your reference equipment.

### Primary Calibration

DPLA annually performs hundreds of primary accredited calibrations of reference microphones and accelerometers for

metrology institutes, test houses, and industry organizations requiring high-accuracy calibrations.

### Secondary Calibration

If your sensitivity requirements are not as high as primary calibration, we recommend that you maintain your reference equipment with annual accredited calibrations in one of our ISO/IEC 17025 accredited laboratories. This is, for example, performed for industrial companies who perform in-house calibrations, tests or any acoustic or vibration measurements.

## Accredited Calibration

Our network of calibration centres operates within the EA and ILAC guidelines for accreditation. Our ISO/IEC 17025 accreditations have been awarded by accreditation bodies that are signatories to the EA-MLA and the ILAC-MRA. This allows us to deliver the same high level of quality, competence and confidence, together with international recognition, wherever the accredited calibration is performed.

Where accredited calibration is not available, Brüel & Kjær centres offer Traceable Calibration.

### Initial Accredited Calibration

Sensitivity data are included with the delivery of every new Brüel & Kjær microphone and accelerometer. However, accredited calibration can be ordered, where required, to start the measurement history from day one – for example, if stipulated by quality procedures, external audits or other requirements.

## Traceable Calibration

You can also order traceable calibration, which means that the measurements are traceable to national standards – at the same level as accredited calibration, only without the formal third-party recognition.

To optimize uptime and minimize costs, we recommend combining calibration with a Hardware Maintenance Agreement.

## Regular Calibration

When you send in your accelerometers and microphones for calibration regularly, you benefit from reliable measurement data; you can compare data over time, provide proof to customers, and fulfil your internal or external quality requirements.

our ISO/IEC 17025 accredited laboratories. This will give you a continuous calibration history to use as reference for internal requirements, for audit purposes required by authorities or just as a request from your customers. You can also follow the history of sensitivity for your equipment over a period of time and detect any questionable trends up-front.

To minimize the errors due to faulty or inaccurate measurements and the related costs, we recommend annual calibration in one of

# Service Agreements

With a Service Agreement you can save both time and money.

The value of a service agreement lies in a combination of the following:

- Assurance that the time your equipment is away for service is minimized
- Attractive total service price

You can combine a range of services in one agreement over several years. You get priority at the time you need service and a predictable maintenance budget. With planned service, your equipment is always ready for use and you preserve your unbroken sensitivity history.

If the Brüel & Kjær technician detects a need for repair or replacement while your equipment is in for calibration, it will be

performed immediately and free of charge, provided your service agreement covers such maintenance. This means that you do not have to be without your equipment several times, that there is no unnecessary communication back and forth to decide what should be done to the equipment, and no large surprises to your budget.

Examples of what a service agreement can contain:

- Your equipment can be calibrated and maintained at the same time
- Multiple calibrations – to give the most favourable price
- Priority calibration
- Priority repair – or replacement
- Extension of manufacturer's warranty
- Loan of an equivalent product while your equipment is being calibrated or repaired

# Rentals

Brüel & Kjær offers rental services for a large number of our products. For further details, please contact your [local sales representative](#).

# Learn More

To learn more about Brüel & Kjær services, including FAQs and how to order calibration or repair, please visit [www.bksv.com/services](http://www.bksv.com/services).



The Calibration Laboratory  
Skodsborgvej 307, DK-2850 Nærum, Denmark




CERTIFICATE OF CALIBRATION No: CDK1505381 Page 1 of 4

---

**CALIBRATION OF**

Calibrator: Brüel & Kjær Type 4231  
 1/2 Inch adaptor: Brüel & Kjær Type UC-0210  
 Pattern Approval: PTB-1.61-4057176

No: 3008930 Id: -

---

**CUSTOMER**

Brüel & Kjær Sound & Vibration Measurement A/S  
 Skodsborgvej 307  
 DK-2850 NÆRUM  
 Denmark

**CONDITIONS**

at 23°C ± 3°C  
 p: 100.56 kPa. Humidity: 43 % RH. Temperature: 23.1 °C.

4231 has been calibrated in accordance with the requirements as specified in the accreditation assures the traceability to the international units system SI.

performed with the assistance of Brüel & Kjær acoustic calibrator calibration application using procedure P\_4231\_D07.

**repair/adjustment.**


is based on the standard uncertainty multiplied by a coverage factor  $k = 2$  providing a level % The uncertainty evaluation has been carried out in accordance with EA-4-02 from and, calibration method, effect of environmental conditions and any short time contribution

7-20 Date of issue: 2015-07-20

  
 Erik Bruus  
 Approved Signatory

  
 Technician

Reproduction of the complete certificate is allowed. Parts of the certificate may only be reproduced after written permission.

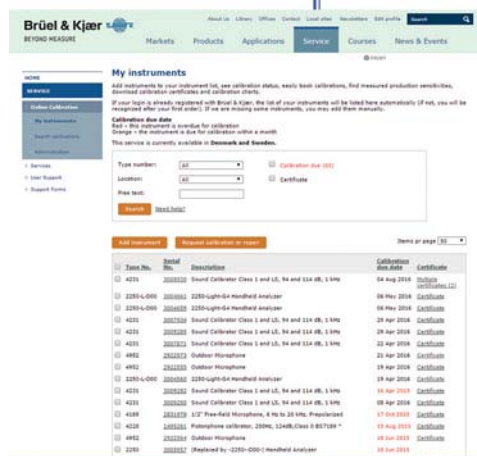

| Item No.  | Serial No. | Description   | Calibration due date | Certificate |
|-----------|------------|---|----------------------|-------------|
| 4231      | 2002028    | Sound Calibrator Class 1 and 1/2, 1/4 and 1/8 in, 1 kHz   | 04 Aug 2016          | CDK1505381  |
| 2296A-000 | 2001093    | 125Hz-weighted modified sine-wave                         | 06 May 2016          | CDK1505381  |
| 2296A-000 | 2001092    | 125Hz-weighted modified sine-wave                         | 06 May 2016          | CDK1505381  |
| 4231      | 2002028    | Sound Calibrator Class 1 and 1/2, 1/4 and 1/8 in, 1 kHz   | 29 Apr 2016          | CDK1505381  |
| 4231      | 2002028    | Sound Calibrator Class 1 and 1/2, 1/4 and 1/8 in, 1 kHz   | 29 Apr 2016          | CDK1505381  |
| 4231      | 2002028    | Sound Calibrator Class 1 and 1/2, 1/4 and 1/8 in, 1 kHz   | 29 Apr 2016          | CDK1505381  |
| 4982      | 2302022    | Outdoor Microphone  | 29 Apr 2016          | CDK1505381  |
| 4982      | 2302022    | Outdoor Microphone  | 29 Apr 2016          | CDK1505381  |
| 3296A-000 | 2002028    | 125Hz-weighted modified sine-wave                         | 19 Apr 2016          | CDK1505381  |
| 4231      | 2002028    | Sound Calibrator Class 1 and 1/2, 1/4 and 1/8 in, 1 kHz   | 19 Apr 2016          | CDK1505381  |
| 4231      | 2002028    | Sound Calibrator Class 1 and 1/2, 1/4 and 1/8 in, 1 kHz   | 19 Apr 2016          | CDK1505381  |
| 4189      | 2402028    | 1/2" Free-Field Microphone, 4 Hz to 20 kHz, Pressure/Free | 17 Oct 2015          | CDK1505381  |
| 4020      | 2402028    | Pressure calibration, 200Pa, 124dB, Class 0 B017001 *     | 19 Aug 2015          | CDK1505381  |
| 4982      | 2302022    | Outdoor Microphone  | 03 Jun 2015          | CDK1505381  |
| 3296      | 2002028    | Reproduced by: (2310-000) Modified sine-wave              | 03 Jun 2015          | CDK1505381  |



# GLOSSARY OF TERMS

## Absorption

The conversion of sound energy into another form of energy, usually heat when passing through an acoustical medium

## Absorption coefficient

Ratio of sound absorbing effectiveness at a specific frequency, of a unit area of acoustical absorbent to a unit area of perfectly absorptive material

## Acceleration

Vector quantity that describes the time-derivative of velocity, mathematically:  $a = dv/dt$ . The SI unit is  $m/s^2$  (metres per second squared). In the imperial system, the unit  $g$  or more correctly  $g_n$  is used, where the definition is that  $1 g_n \equiv 9.80665 m/s^2$

Acceleration can be oscillatory (and then often called vibration), in which case simple harmonic components can be defined by the acceleration amplitude (and frequency), or random, in which case the rms acceleration (and bandwidth and probability density distribution) can be used to define the probability that the acceleration will have values within any given range. Accelerations of short time duration are defined as transient accelerations. Non-oscillatory accelerations are defined as sustained accelerations, if of long duration, or as acceleration pulses, if of short duration.

In the case of time-dependent accelerations various self-explanatory modifiers, such as peak, average, and rms (root-mean-square), are often used. The time intervals over which the average or root-mean-square values are taken should be indicated or implied

## Accelerometer

A transducer that converts an input acceleration to an output (usually electrical) that is proportional to the input acceleration

## Acoustics

The science of the production, control, transmission, reception and effects of sound and of the phenomenon of hearing

## Active sound field

A sound field in which the particle velocity is in phase with the sound pressure. All acoustic energy is transmitted, none is stored. A plane wave propagating in a free field is an example of a purely active sound field and constitutes the real part of complex sound field

## Ambient noise

All-pervasive noise associated with a given environment

## Amplitude

The instantaneous magnitude of an oscillating quantity such as sound pressure. The peak amplitude is the maximum value.

In a vibrating object, amplitude is measured and expressed in three ways: Displacement, Velocity and Acceleration. Amplitude is also the y-axis of the vibration time waveform and spectrum; it helps define the severity of the vibration

## Amplitude distribution

A method of representing time-varying noise by indicating the percentage of time that the noise level is present in a series of amplitude intervals

## Anechoic room

A room whose boundaries effectively absorb all incident sound over the frequency range of interest, thereby creating essentially free-field conditions

## Audibility threshold

The sound pressure level, for a specified frequency at which persons with normal hearing begin to respond

## Background noise

The ambient noise level above which signals must be presented or noise sources measured

## CCLD (Constant Current Line Drive)

Generic name for a constant current power supply for accelerometers with built-in electronics and for these accelerometers. Used in Brüel & Kjær analyzers and literature. See also [DeltaTron](#)

## Charge amplifier

An amplifier that converts the charge output of a piezoelectric accelerometer into a proportional low-impedance voltage signal

## Charge converter

A device that converts a piezoelectric accelerometer's high-impedance charge output to a low-impedance voltage proportional to the charge input. A charge converter typically requires a constant current power supply.

Also called 'in-line charge converter'

## Complex intensity

Complex intensity is the combined intensity and imaginary intensity

## Conditioning (signal conditioning)

The conversion or alteration of an accelerometer signal to a suitable or desirable level, range or bandwidth. Signal conditioning includes amplification, filtering, differential applications, isolation, transducer tests and more

**Cumulative distribution**

A method of representing time-varying noise by indicating the percentage of time that the noise level is present above (or below) a series of amplitude levels

**Damping (1)**

The action of frictional or dissipative forces on a dynamic system causing the system to lose energy and reduce the amplitude of movement

**Damping (2)**

Removal of echoes and reverberation by the use of sound absorbing materials. Also called sound proofing

**DC response**

Accelerometers respond to a fairly wide frequency range, most down to 1 or 2 Hz. Some special accelerometers respond to zero frequency and are, therefore, said to exhibit a 'DC response'

**Decibel scale**

A linear numbering scale used to define a logarithmic amplitude scale, thereby compressing a wide range of amplitude values to a small set of numbers

**DeltaTron**

Brüel & Kjær's proprietary name for accelerometers with built-in electronics and the constant current power supply for these. Brüel & Kjær also uses the generic name CCLD (Constant Current Line Drive). It corresponds to IEPE (Integrated Electronics Piezo Electric) often used for accelerometers requiring this kind of power supply. Other similar proprietary names are ISOTRON®, PIEZOTRON® and ICP®.

Other types of accelerometers with different powering principles exists, for example, Brüel & Kjær's CVLD (Constant Voltage Line Drive) that is used for maximum EMC immunity

**Differentiation**

In vibration analysis, the three physical parameters, displacement, velocity and acceleration, are mathematically related. Differentiation is a mathematical operation that converts one parameter to another (for example, a displacement signal to a velocity signal, or velocity signal to an acceleration signal). See also [Integration](#), which is the inverse of differentiation

**Diffraction**

The scattering of radiation at an object smaller than one wavelength and the subsequent interference of the scattered wavefronts

**Diffuse field**

A sound field in which the sound pressure level is the same everywhere and the flow of energy is equally probable in all directions

**Diffuse sound**

Sound that is completely random in phase; sound which appears to have no single source

**Directivity factor**

The ratio of the mean-square pressure (or intensity) on the axis of a transducer at a certain distance to the mean-square pressure (or intensity) which a spherical source radiating the same power would produce at that point

**Displacement**

Time-varying quantity that specifies the change in position of a point on a body with respect to a reference frame. In the SI system it is measured in metres (m). In the imperial system thousands of an inch is often used (mils)

**Dynamic capability**

The dynamic capability of an intensity measurement system is determined by adding normally 5 dB (for a measuring error less than 2 dB) to the Residual Intensity Index

**Dynamic range**

Range of values that can be measured

Normally expressed as the ratio in dB between the smallest signal level an instrument can sense to the largest signal it will accept without an overload occurring. Modern vibration analysis instrumentation can have a dynamic ranges up to 160 dB

**Excitation**

External force (or other input) applied to a system that causes the system to respond in some way

**Far field**

Distribution of acoustic energy at a very much greater distance from a source than the linear dimensions of the source itself; the region of acoustic radiation used to the source and in which the sound waves can be considered planar

**Filter**

An electrical circuit that intercepts input signals and blocks those that are above or below a specific frequency band or a mechanical filter that suppresses vibration amplitude levels at certain frequencies

**Forced vibration**

Vibration of a system due to an external time dependent force

**Free field**

An environment in which there are no reflective surfaces within the frequency region of interest

**Frequency response**

Response within a given frequency range when the complex sensitivity of the transducer for a given excitation is not constant over that range. Often given as the magnitude and phase

**Frequency response function**

Frequency-dependent ratio of the motion-response Fourier transform to the Fourier transform of the excitation force of a linear system. Frequency response measurements are used extensively in modal analysis of mechanical systems



## **$g_n$ (g)**

Standard acceleration due to gravity. The value was adopted in the International Service of Weights and Measures and confirmed in 1913 by the 5th CGPM as the standard for acceleration due to gravity.

- Unit: 9.80665 metres per second-squared (9.80665 m/s<sup>2</sup>)
- Symbol:  $g_n$  (in vibration literature, this is often shorted to  $g$  but should not be misunderstood as the gravitational force mentioned below)

This “standard value” ( $g_n = 9.80665 \text{ m/s}^2 \approx 386.089 \text{ in/s}^2 \approx 32.1740 \text{ ft/s}^2$ ) should be used for reduction to standard gravity of measurements made in any location on Earth.

Frequently, the magnitude of acceleration is expressed in units of  $g_n$ .

Note: The actual acceleration produced by the force of gravity at or below the surface of the Earth varies with the latitude and elevation of the point of observation. This variable often is expressed using the symbol  $g$ . Caution should be exercised if this is done so as not to create an ambiguity with this use and the standard symbol for the unit of the gram

## **Ground loop**

In instrumentation systems, such as vibration measurement data collection systems, it is often required to mount a transducer on a machine whose structure or “ground” may have an electrical voltage present on it caused by current leakage in motor windings, etc. The transducer cable shield is normally connected to the housing, and is then electrically connected to this voltage when the transducer is mounted. If the instrument to which the transducer is connected is connected to a different ground, such as a power line neutral, this difference in the ground potentials will cause a current in the shield, and this will add interference to the measured signal. The interference will be at 50 or 60 Hz and harmonics, and it reduces the signal to noise ratio of the measurement. This condition is called a ground loop, and there are several ways to avoid it. One is to use an insulating disc between the transducer and the machine, another is to use a battery operated instrument that is not connected to a power line

## **Harmonics**

Harmonic vibration, the frequency of which is an integral multiple of the fundamental frequency

## **Hearing loss**

An increase in the threshold of audibility due to disease, injury, age or exposure to intense noise

## **Hertz (Hz)**

The unit of frequency representing cycles per second

## **High-pass filter**

An electrical circuit that intercepts input signals and blocks those that are below a specific frequency band. Besides eliminating low-

frequency noise, a high-pass filter separates a signal’s alternating components from its direct (DC) components

## **IEPE**

Integral Electronics Piezoelectric is a generic term for transducers with built-in electronics. A number of proprietary systems such as DeltaTron<sup>®</sup>, ISOTRON<sup>®</sup>, ICP<sup>®</sup> and PIEZOTRON<sup>®</sup> exist. See also [CCLD](#)

## **Imaginary intensity**

Imaginary intensity is the non-propagating part of the sound field (sometimes called the reactive part)

## **Impact test**

Impact testing provides a method of determining the frequency response function of a structure. Accelerometers are placed on the structure, and an object, such as a specially constructed impact hammer, is used to hit the structure. The hammer is instrumented to measure the input force pulse, while the accelerometers pick up the response of the structure. From this vibrational response, it is important to be aware of excitation frequencies that coincide with the natural frequencies of the structure (resonances), as these point to dangerous operating levels

## **Impedance, specific acoustic**

The complex ratio of dynamic pressure to particle velocity at a point in an acoustic medium.

Measured in rayls (1 rayl = 1 N · S/m<sup>3</sup>)

## **Impedance, mechanical**

The complex ratio of force to velocity at a specified point and degree-of-freedom in a mechanical system. It is a measure of how much a structure resists motion

## **Infrasound**

Sound at frequencies below the audible range, that is, below about 16 Hz

## **Integration**

Integration is the inverse of differentiation. See [Differentiation](#)

## **Intensity**

Intensity is the real part of the complex intensity and is the propagating part of the sound field (sometimes called the active part)

## **Isolation**

A decreased tendency to respond to or transmit a sound through the use of resilient materials and structures

## **Leakage, spectral**

The broadening of a peak in the frequency domain caused by window function with the Fourier transform

## **Leakage error**

Error in frequency description caused by truncation of signal.

Leakage can be reduced using time weighting functions such as Hanning Window

**Level (of a quantity)**

The logarithm of the ratio of the quantity to a reference of the same kind.

In vibration terminology, the term level is sometimes used to denote amplitude, average value, root-mean-square value, or ratios of these values. Strictly speaking, these terms should not be used

**Linear system**

A system in which the magnitude of the response is proportional to the magnitude of the excitation

**Loudness**

Subjective impression of the intensity of a sound

**Low-pass filter**

An electrical circuit that intercepts input signals and blocks those that are above a specific frequency called the 'cut-off frequency'. An example is the anti-aliasing filter

**Masking**

The process by which threshold of audibility of one sound is raised by the presence of another (masking) sound

**Mobility (mechanical mobility)**

The complex ratio of the velocity, taken at a point in a mechanical system, to the force, taken at the same or another point in the system. Mechanical mobility is the matrix inverse of mechanical impedance. It is a measure of how easily a structure is able to move in response to an applied force

**Modal analysis**

Vibration analysis method that characterizes a complex structural system by its modes of vibration, that is, its natural frequencies, modal damping and mode shapes, and based on the principle of superposition

**Near field**

That part of a sound field, usually within about two wavelengths from a noise source, where there is no simple relationship between sound level and distance

**Newton**

The force required to accelerate a kg mass at  $1 \text{ m/s}^2$ . Approximately equal to the gravitational force on a 100 g mass

**Noise emission level**

The dB(A) level measured at a specified distance and direction from a noise source, in an open environment, above a specified type of surface. Generally follows the recommendation of a national or industry standard

**Noise reduction coefficient, NRC**

The arithmetic average of the sound absorption coefficients of a material at 250, 500, 1000 and 2000 Hz

**Noy**

A linear unit of noisiness or annoyance

**Particle velocity**

The velocity of air molecules about their rest position due to a sound wave

**Pascal, Pa**

A unit of pressure corresponding to a force of 1 newton acting uniformly upon an area of 1 square metre. Hence:  $1 \text{ Pa} = 1 \text{ N/m}^2$

**Peak**

A measurement's maximum instantaneous value (displacement, velocity, acceleration or voltage) in a given period. Peaks can be both negative and positive in direction

- Peak value
- Peak magnitude
- Positive peak value
- Negative peak value

Note: A peak value of vibration is usually taken as the maximum deviation of that vibration from the mean value. A positive peak value is the maximum positive deviation and a negative peak value is the maximum negative deviation

**Peak-to-peak value (of a vibration)**

Difference between the maximum positive and maximum negative values of a vibration during a specified interval

**Phase**

Argument of a complex vibration

**Phase mismatch (in acoustic measurements)**

The relative phase mismatch between the two channels in an intensity measuring system

**Phon**

The loudness level of a sound. It is numerically equal to the sound pressure level of a 1 kHz free progressive wave, which is judged by reliable listeners to be as loud as the unknown sound

**Pink noise**

Broadband noise whose energy content is inversely proportional to frequency ( $-3 \text{ dB}$  per octave or  $-10 \text{ dB}$  per decade)

**Power spectrum level**

The level of the power in a band one hertz wide referred to a given reference power

**Pressure-residual Intensity Index,  $\delta_{pI_0}$** 

The pressure-residual intensity index for a given measurement system is defined as the difference between the measured pressure level and the indicated sound intensity level when exactly the same signal is fed into the two channels of an intensity analysing system

**Random noise**

Noise, whose instantaneous amplitude is not specified at any instant of time. Instantaneous amplitude can only be defined statistically by an amplitude distribution function

**Relative velocity**

The rate of change of displacement. It is expressed in units of distance per unit of time. In terms of vibration signals, it would be millimetres per second or inches per second.

In general, velocity is time-dependent. A velocity is designated as relative velocity if it is measured with respect to a reference frame other than the primary reference frame designated in a given case. The relative velocity between two points is the vector difference between the velocities of the two points. Velocity can be oscillatory, in which case simple harmonic components can be defined by the velocity amplitude (and frequency), or random, in which case the root-mean-square (rms) velocity (and band width and probability density distribution) can be used to define the probability that the velocity will have values within any given range. Velocities of short time duration are defined as transient velocities. Non-oscillatory velocities are defined as sustained velocities, if of long duration

**Residual Intensity**

The sound intensity level measured when the same signal is fed to both channels of a sound intensity measuring system

**Residual Noise**

For charge accelerometers, the noise is a function of the preamplifier and given within the specified frequency range. The specified noise level is measured with NEXUS Conditioning Amplifier Type 2692-001. For accelerometers with integrated electronics, the noise is given within specified frequency range

**Resonance**

State of a system in forced oscillation when any change, however small, in the frequency of excitation causes a decrease in a response of the system

**Resonance frequency**

Frequency at which resonance exists

**Reverberation**

The persistence of sound in an enclosure after a sound source has been stopped. Reverberation time is the time, in seconds, required for sound pressure at a specific frequency to decay 60 dB after a sound source is stopped

**RMS (Root Mean Square)**

The square root of the arithmetic average of a set of squared instantaneous values

**Sabin**

A measure of sound absorption of a surface. One metric sabin is equivalent to 1 square metre of perfectly absorptive surface

**Seismic**

When accelerated, a seismic transducer such as a piezoelectric accelerometer or a velocity transducer, uses the inertial force produced by its seismic mass to generate a signal

**Semi-anechoic field**

A free field above a reflective plane

**Sensitivity (of a transducer)**

Ratio of a specified output quantity to a specified input quantity.

For an accelerometer, sensitivity is expressed in millivolts or picocoulombs per  $m/s^2$  or  $g$  ( $mV/ms^{-2}$  or  $mV/g$ ,  $pC/ms^{-2}$  or  $pC/g$ ). The sensitivity of a transducer is usually determined as a function of frequency using sinusoidal excitation

**Shielding**

Enclosure of test equipment and cables to prevent the occurrence of noise in a signal (such as interference, interaction or current leaks)

**Shock**

Sudden change of force, position, velocity or acceleration that excites transient disturbances in a system.

The change is normally considered sudden if it takes place in a time that is short compared with the fundamental periods of concern

**Sone**

A linear unit of loudness. The ration of loudness of a sound to that of a 1 kHz tone 40 dB above the threshold of hearing

**Sound**

Energy that is transmitted by pressure waves in air or other materials and is the objective cause of the sensation of hearing. Commonly called noise if it is unwanted

**Sound intensity**

The rate of sound energy transmission per unit area in a specified direction

**Sound level**

The level of sound measured with a sound level meter and one of its weighting networks. When A-weighting is used, the sound level is given in dB(A)

**Sound level meter (SLM)**

An electronic instrument for measuring the RMS level of sound in accordance with an accepted national or international standard

**Sound power**

The total sound energy radiated by a source per unit time

**Sound power level**

The fundamental measure of sound power. Defined as:

$$L_W = 10 \left( \log \frac{P}{P_0} \right) \text{ dB}$$

Where  $P$  is the RMS value of sound power in watts, and  $P_0$  is 1  $\mu\text{W}$

**Sound pressure**

A dynamic variation in atmospheric pressure. The pressure at a point in space minus the static pressure at that point

**Sound pressure level**

The fundamental measure of sound pressure. Defined as:

$$L_p = 20 \left( \log \frac{p}{p_0} \right) \text{dB}$$

Where  $p$  is the RMS value (unless otherwise stated) of sound pressure in pascals, and  $p_0$  is 20  $\mu\text{Pa}$  for measurements in air

**Sound transmission class, STC**

A single-number rating for describing sound transmission loss of a wall or partition

**Sound transmission loss**

Ratio of the sound energy emitted by an acoustical material or structure to the energy incident upon the opposite side

**Standing wave**

A periodic wave having a fixed distribution in space which is the result of interference of progressive waves of the same frequency and kind. Characterised by the existence of maxima and minima amplitudes that are fixed in space

**Transducer**

A device designed to convert energy from one form to another in such a manner that the desired characteristics of the input energy appear at the output. Includes accelerometers, eddy current probes, loudspeakers, microphones and velocity transducers

Note 1: The output is usually electrical

Note 2: The use of the term "pick-up" is deprecated

**Transient vibration**

Vibration that decays with time. This term is basically associated with mechanical shock

**Triaxial**

Three axes. A triaxial accelerometer is a single instrument with three sensing elements oriented to measure vibration in three axes

**Triboelectric Noise**

Generated by movement in the cable's components, resulting in charge or voltage noise signals. Mechanically induced noise is a critical and frequent concern when using charge accelerometers

**Trigger**

An electric impulse that is used as a timing reference, generally for purposes of initiating a process or measurement

**Ultrasound**

Sound at frequencies above the audible range, that is, above about 20 kHz

**Uni-Gain**

The sensitivity of Uni-Gain accelerometers are guaranteed within tight tolerances for easy interchangeability without recalibration. This designation indicates that the measured accelerometer sensitivity has been adjusted during manufacture to within 2% of a convenient value

**Velocity**

The rate of change of position or displacement in relation to time along a specified axis

**Vibration**

Mechanical oscillations about an equilibrium point. The oscillations may be periodic or random

**Wavelength**

The distance measured perpendicular to the wavefront in the direction of propagation between two successive points in the wave, which are separated by one period. Equals the ratio of the speed of sound in the medium to the fundamental frequency

**Weighting network**


An electronic filter in a sound level meter which approximates under defined conditions the frequency response of the human ear. The A-weighting network is most commonly used

**White noise**

Broadband noise having constant energy per unit of frequency

# COMPLIANCE WITH STANDARDS

## General Compliance

|  |  |
|--|--|
|  | <p>The CE marking is the manufacturer's declaration that the product meets the requirements of the applicable EU directives</p> <p>RCM mark indicates compliance with applicable ACMA technical standards—that is, for telecommunications, radio communications, EMC and EME</p> <p>China RoHS mark indicates compliance with administrative measures on the control of pollution caused by electronic information products according to the Ministry of Information Industries of the People's Republic of China</p> <p>WEEE mark indicates compliance with the EU WEEE Directive</p> |
| <p><b>Safety</b></p>   | <p>EN/IEC 61010–1: Safety requirements for electrical equipment for measurement, control and laboratory use.</p> <p>ANSI/UL 61010–1: Safety requirements for electrical equipment for measurement, control and laboratory use.</p>   |
| <p><b>EMC Emission</b></p>   | <p>EN/IEC 61000–6–3: Generic emission standard for residential, commercial and light industrial environments.</p> <p>EN/IEC 61000–6–4: Generic emission standard for industrial environments.</p> <p>CISPR 22: Radio disturbance characteristics of information technology equipment. Class B Limits.</p> <p>FCC Rules, Part 15: Complies with the limits for a Class B digital device.</p>  |
| <p><b>EMC Immunity</b></p>   | <p>EN/IEC 61000–6–1: Generic standards – Immunity for residential, commercial and light industrial environments.</p> <p>EN/IEC 61000–6–2: Generic standards – Immunity for industrial environments.</p> <p>EN/IEC 61326: Electrical equipment for measurement, control and laboratory use – EMC requirements.</p> <p><b>Note:</b> The above is only guaranteed using accessories listed in this Catalogue.</p>   |

## Relevant Microphone Standards

Laboratory reference microphones are specified in the international standard IEC 61094–1:2000.

Measurement microphones are specified in the international standard IEC 61094–4:1995.

These standards use the abbreviation WS for working standards, for example, measurement microphones used in daily routine measurements, while the abbreviation LS denotes laboratory standards.

The digits following “WS” indicate as follows:

- 1 = 1-inch microphone
- 2 = 1/2-inch microphone
- 3 = 1/4-inch microphone

The letter “F” denotes a free-field type and “P” a pressure- field type.

### Electroacoustic Standards

The most relevant electroacoustic standard is the IEC 61672:2002 “Electroacoustics—Sound Level Meters”. Although the microphone is an important component in any system that has to comply with IEC 61672 there are many other factors to consider.

It is also worth considering other parameters such as phase response, venting, environmental exposure and documentation

The tables in the Microphone section show which microphones are comply with the various electroacoustic standards including those







that are suitable to be used in system solutions that have to fulfil the requirements of IEC 61672. The following overview shows the coding used to display the relevant standard.

|   | IEC 61094        |   | IEC 61672         |   | ANSI              |
|---|------------------|---|-------------------|---|-------------------|
| A | IEC 61094–4 WS1F | I | IEC 61672 Class 1 | K | ANSI S1.4 Type 1  |
| B | IEC 61094–4 WS2F | J | IEC 61672 Class 2 | L | ANSI S1.4 Type 2  |
| C | IEC 61094–4 WS3F |   |                   | M | ANSI S1.12 Type M |
| D | IEC 61094–4 WS1P |   |                   |   |                   |
| E | IEC 61094–4 WS2P |   |                   |   |                   |
| F | IEC 61094–4 WS3P |   |                   |   |                   |
| G | IEC 61094–1 LS1P |   |                   |   |                   |
| H | IEC 61094–1 LS2P |   |                   |   |                   |


# DIMENSIONS

## Microphone Dimensions


The following table shows the dimensions of the most popular Brüel & Kjær microphones. In most cases, a TEDS combination is displayed (with a preamplifier). All dimensions are in millimetres.
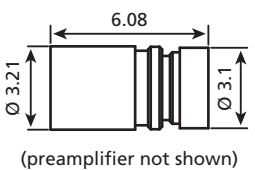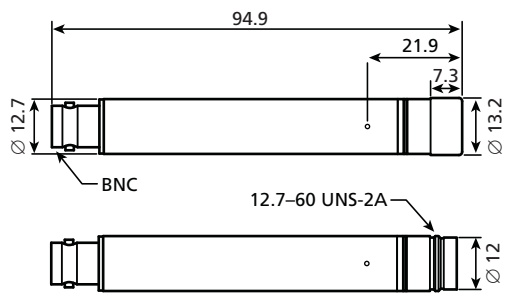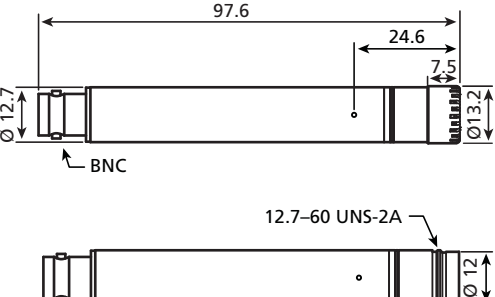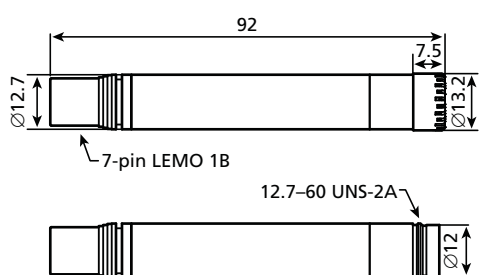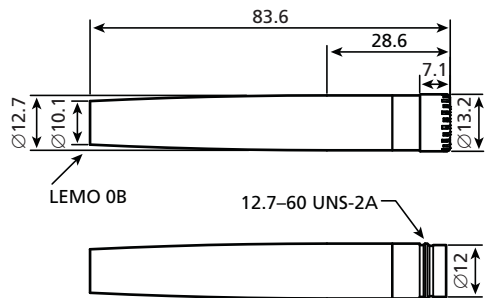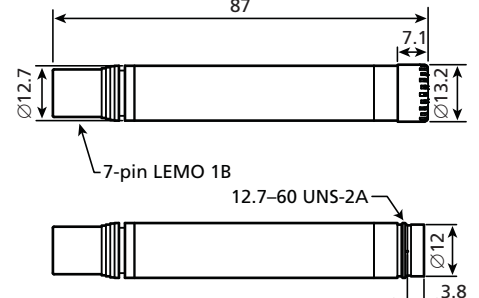
|  |   |
|--|---|
| <p>Type 4138</p>  <p>(preamplifier not shown)</p>                         | <p>Type 4188 (with Type 2671)</p>  <p>BNC</p> <p>12.7-60 UNS-2A</p>               |
| <p>Type 4189 (with Type 2671)</p>  <p>BNC</p> <p>12.7-60 UNS-2A</p>     | <p>Type 4190 (with Type 2669-C)</p>  <p>7-pin LEMO 1B</p> <p>12.7-60 UNS-2A</p> |
| <p>Type 4191 (with Type 2669)</p>  <p>LEM0 0B</p> <p>12.7-60 UNS-2A</p> | <p>Type 4192 (with Type 2669-C)</p>  <p>7-pin LEMO 1B</p> <p>12.7-60 UNS-2A</p> |


Type 4193 (with Adaptor UC-0211 and Type 2669-C)

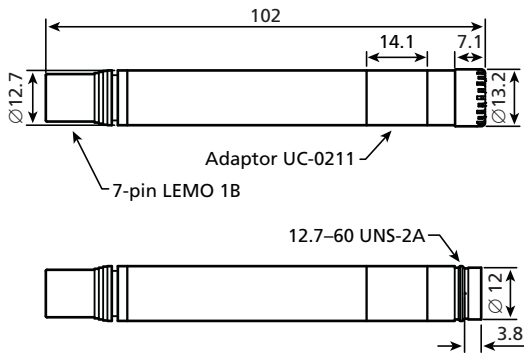


Type 4938 (with Type 2670)

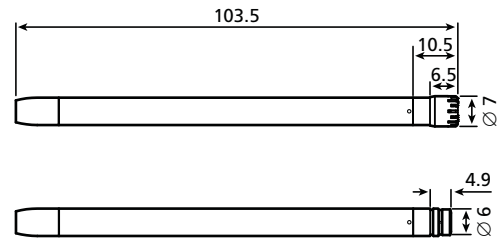


Type 4939 (with Type 2670)

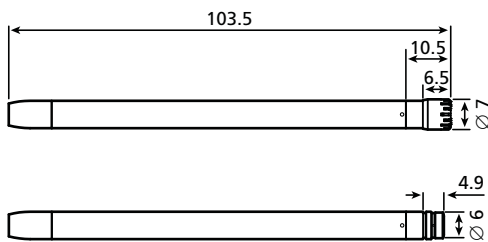


Type 4941 (with Adaptor UA-0035 and Type 2669-C)

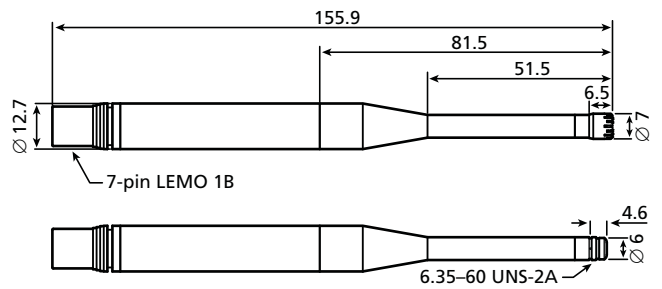


Type 4942 (with Type 2669)

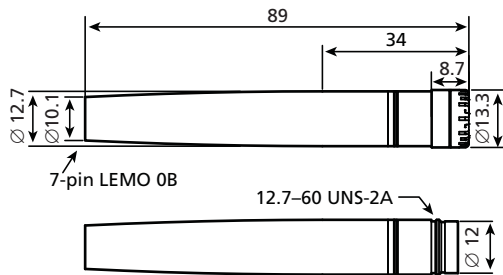


Type 4943 (with Type 2669-C)

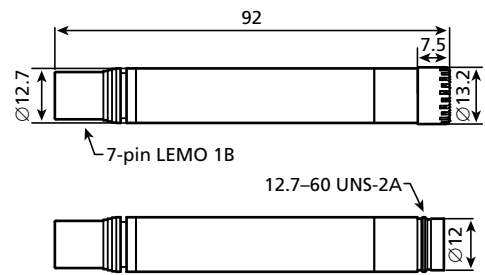


Type 4944-A

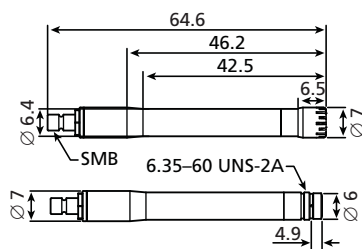


Type 4948

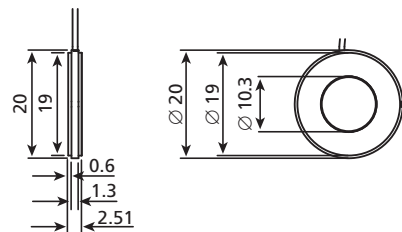


Type 4949

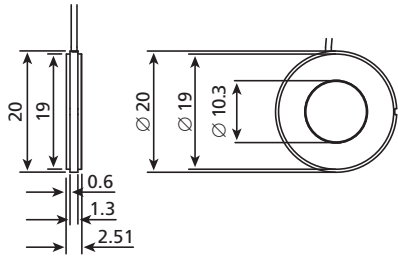


Type 4952

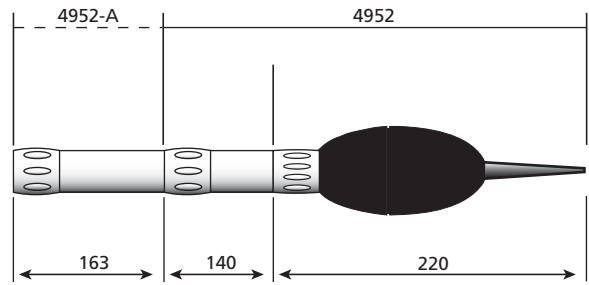


Type 4954 (with Type 2670)

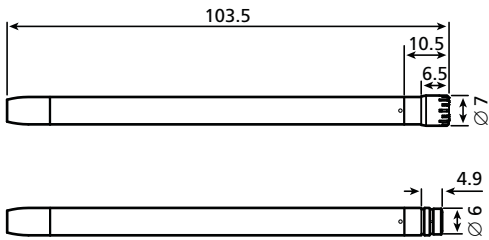


Type 4955

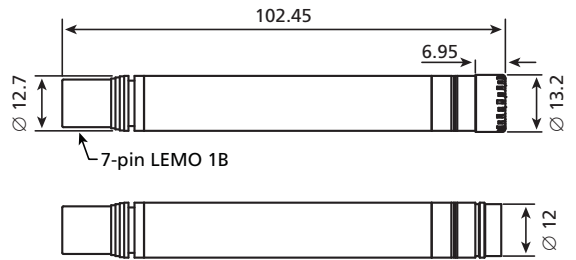


Type 4956 (with Type 2671)

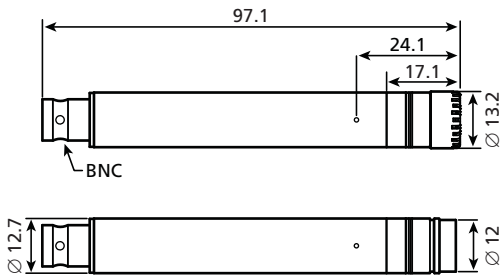

Type 4957




Type 4958



Type 4959












Type 4961

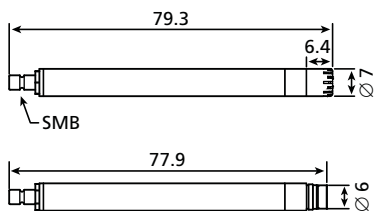




# Accelerometer Dimensions


The following table shows the dimensions of the most popular Brüel & Kjær accelerometers. All dimensions are in millimetres.
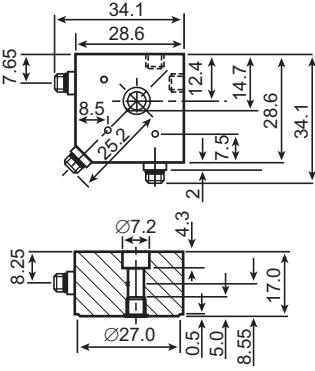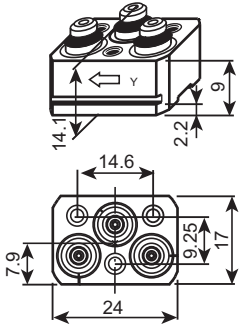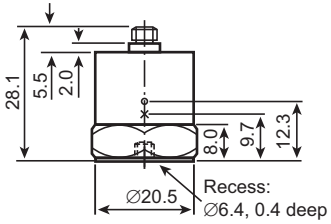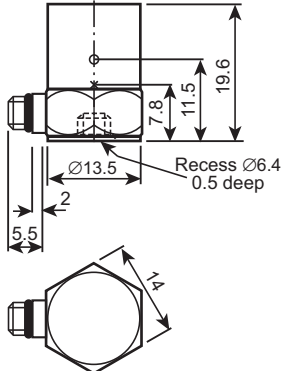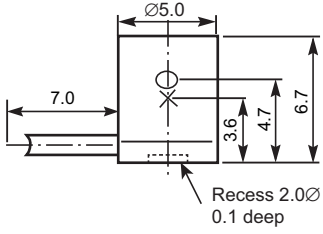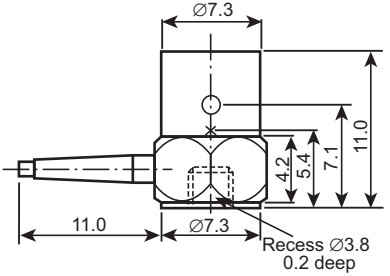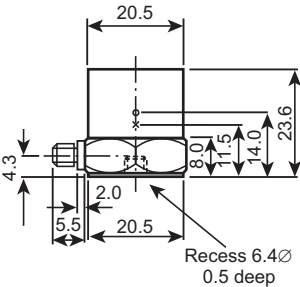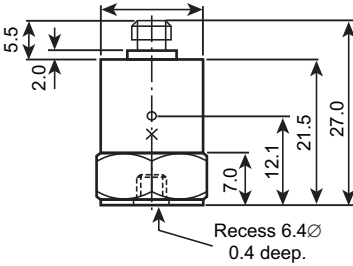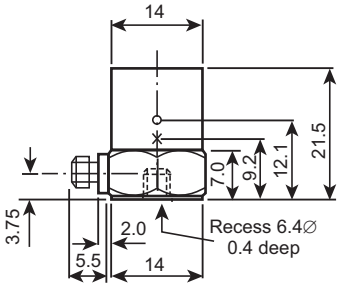
|  |   |  |
|--|---|--|
| <p>Type 4321</p>  <p>Technical drawing of Type 4321 accelerometer. Top view shows a square footprint with dimensions 34.1 mm by 34.1 mm. Key features include a 7.65 mm wide top edge, a 28.6 mm wide central area, and a 12.4 mm wide bottom section. A hole with a diameter of 7.2 mm is located 4.3 mm from the bottom edge. A side view shows a total height of 17.0 mm and a diameter of 27.0 mm.</p>        | <p>Type 4326</p>  <p>Technical drawing of Type 4326 accelerometer. Top view shows a square footprint with dimensions 24 mm by 24 mm. Key features include a 14.6 mm wide top edge, a 7.9 mm wide bottom section, and a 9.25 mm wide central area. A side view shows a total height of 17 mm.</p>   | <p>Type 4370</p>  <p>Technical drawing of Type 4370 accelerometer. Side view shows a total height of 28.1 mm. Key features include a 5.5 mm wide top edge, a 2.0 mm wide bottom section, and a diameter of 20.5 mm. A recessed area is specified as 6.4 mm diameter and 0.4 mm deep.</p>  |
| <p>Type 4371</p>  <p>Technical drawing of Type 4371 accelerometer. Side view shows a total height of 19.6 mm. Key features include a 7.8 mm wide top edge, a 11.5 mm wide bottom section, and a diameter of 13.5 mm. A recessed area is specified as 6.4 mm diameter and 0.5 mm deep. Top view shows a hexagonal footprint with a width of 14 mm.</p>  | <p>Type 4374</p>  <p>Technical drawing of Type 4374 accelerometer. Side view shows a total height of 6.7 mm. Key features include a diameter of 5.0 mm, a 7.0 mm wide top edge, a 3.6 mm wide bottom section, and a 4.7 mm wide central area. A recessed area is specified as 2.0 mm diameter and 0.1 mm deep.</p>   | <p>Type 4375</p>  <p>Technical drawing of Type 4375 accelerometer. Side view shows a total height of 11.0 mm. Key features include a diameter of 7.3 mm, a 11.0 mm wide top edge, a 4.2 mm wide bottom section, a 5.4 mm wide central area, and a 7.1 mm wide bottom section. A recessed area is specified as 3.8 mm diameter and 0.2 mm deep.</p>   |
| <p>Type 4381</p>  <p>Technical drawing of Type 4381 accelerometer. Side view shows a total height of 23.6 mm. Key features include a diameter of 20.5 mm, a 4.3 mm wide top edge, a 2.0 mm wide bottom section, a 5.5 mm wide central area, an 8.0 mm wide bottom section, a 11.5 mm wide central area, and a 14.0 mm wide bottom section. A recessed area is specified as 6.4 mm diameter and 0.5 mm deep.</p> | <p>Type 4382</p>  <p>Technical drawing of Type 4382 accelerometer. Side view shows a total height of 27.0 mm. Key features include a diameter of 14 mm, a 5.5 mm wide top edge, a 2.0 mm wide bottom section, a 7.0 mm wide central area, a 12.1 mm wide bottom section, and a 21.5 mm wide bottom section. A recessed area is specified as 6.4 mm diameter and 0.4 mm deep.</p> | <p>Type 4383</p>  <p>Technical drawing of Type 4383 accelerometer. Side view shows a total height of 21.5 mm. Key features include a diameter of 14 mm, a 3.75 mm wide top edge, a 2.0 mm wide bottom section, a 5.5 mm wide central area, a 7.0 mm wide bottom section, a 9.2 mm wide central area, a 12.1 mm wide bottom section, and a 21.5 mm wide bottom section. A recessed area is specified as 6.4 mm diameter and 0.4 mm deep.</p> |


Type 4384

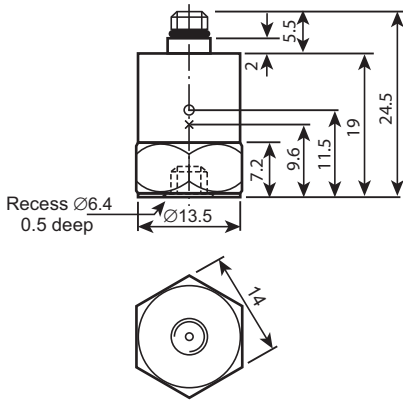


Type 4391

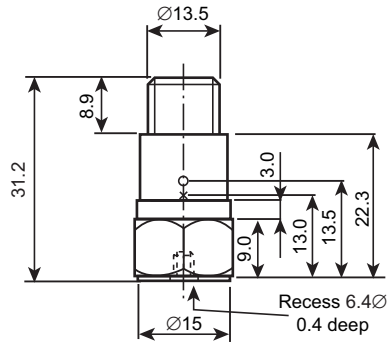


Type 4393

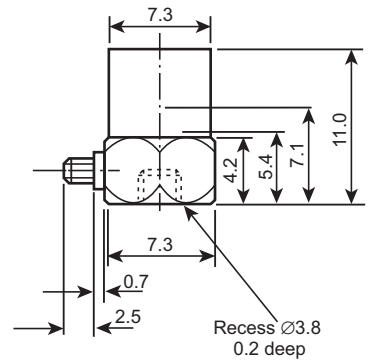


Type 4394




Type 4397

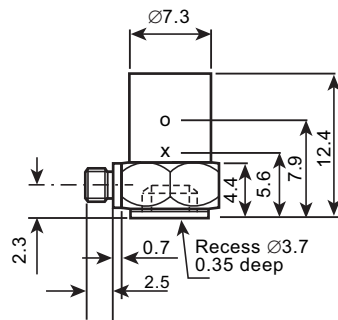


Type 4500

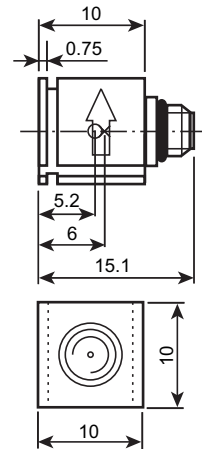


Type 4501

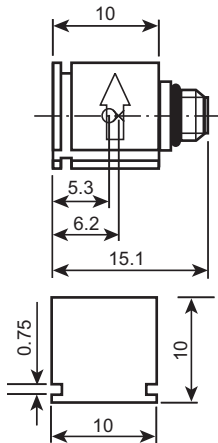


Type 4505




Type 4506

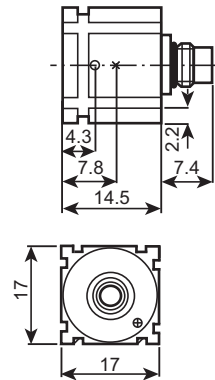


Type 4507

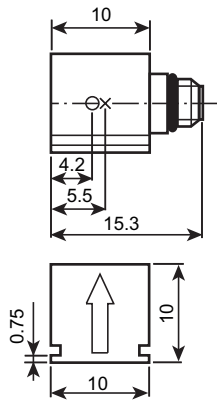


Type 4508




Type 4511

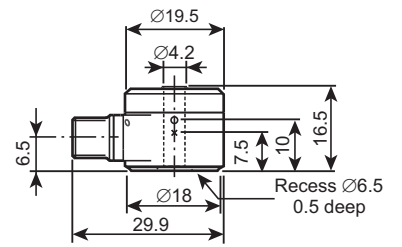


Type 4516




Type 4517




Type 4518

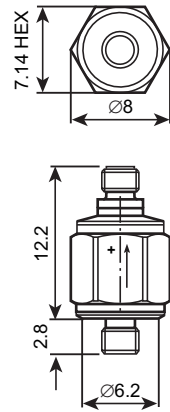


Type 4519

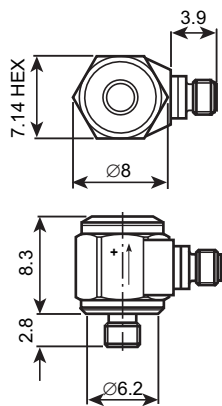


Type 4521




Type 4523




Type 4524




Type 4526

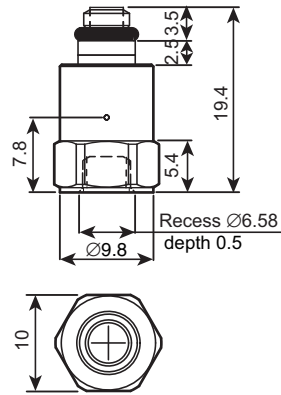


Type 4527, 4528, and 4535

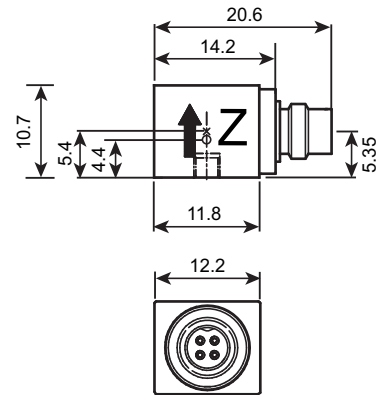


Type 4533

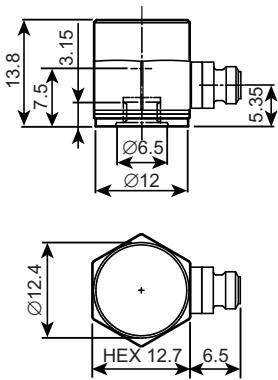


Type 4534

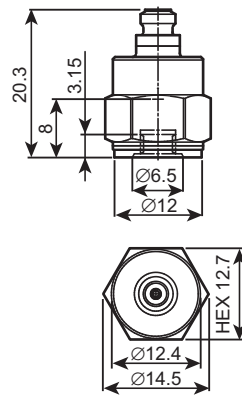


Type 457x




Type 5958




Type 8309

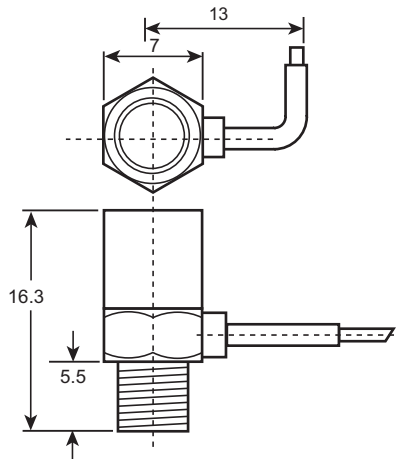


Type 8324-100 and 8347-C




Type 8339

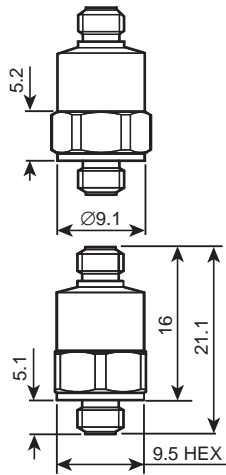


Type 8341

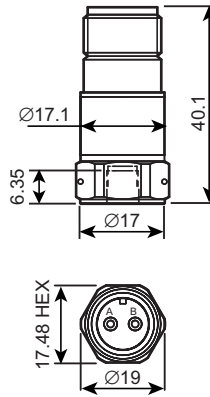


Type 8344



Type 8345

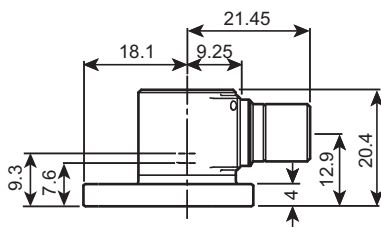

Type 8346-C





# MICROPHONE COMPARISON TABLE

| Specification  | 4138  | 4144  | 4145  | 4160                             | 4176                               | 4178                               | 4179  | 4180                              | 4188   | 4189   | 4190  | 4191  | 4192  | 4193   | 4197   | 4938  | 4939                               | 4940   | 4941                               | 4942   | 4943  | 4944  | 4947                               | 4950                               | 4953                               | 4954   | 4956  | 4964   |                          |
|--|---|---|---|----------------------------------|------------------------------------|------------------------------------|---|-----------------------------------|--|--|---|---|---|--|--|---|------------------------------------|--|------------------------------------|--|---|---|------------------------------------|------------------------------------|------------------------------------|--|---|--|--------------------------|
| <b>Main Purpose</b>  | High frequency  | General purpose<br>Low sound pressure level                             | General purpose<br>Low sound pressure level                             | Reference                        | General purpose                    | Sound intensity                    | Very low sound pressure level   | Reference                         | General purpose  | General purpose  | General purpose   | General purpose   | General purpose   | Low frequency  | Sound intensity  | High sound pressure level<br>High frequency | General purpose<br>High frequency  | For use with<br>Sound Level Meter<br>Type 2231         | Very high sound pressure level     | General purpose  | General purpose   | High sound pressure level                             | QA testing                         | General purpose                    | General purpose                    | General purpose  | General purpose   | Low frequency  |                          |
| <b>Diameter</b>  | 1/8-inch  | 1-inch  | 1-inch  | 1-inch                           | 1/2-inch                           | 1/4-inch                           | 1-inch  | 1/2-inch                          | 1/2-inch   | 1/2-inch   | 1/2-inch  | 1/2-inch  | 1/2-inch  | 1/2-inch   | 1/2-inch   | 1/4-inch                                    | 1/4-inch                           | 1/2-inch   | 1/4-inch                           | 1/2-inch   | 1/2-inch  | 1/4-inch  | 1/2-inch                           | 1/2-inch                           | 1/4-inch                           | 1/2-inch   | 1/2-inch  | 1/2-inch   |                          |
| <b>Description</b>   | Pressure-field  | Pressure-field  | Free-field  | Pressure-field                   | Free-field                         | Sound intensity<br>microphone pair | Free-field  | Pressure-field                    | Free-field   | Free-field   | Free-field  | Free-field  | Pressure-field  | Infrasound<br>Pressure-field                                 | Free-field pair<br>for sound intensity                             | Pressure-field                              | Free-field                         | Free-field   | Pressure-field                     | Diffuse-field  | Diffuse-field   | Pressure-field  | Pressure-field                     | Free-field                         | Pressure-field                     | Free-field   | Pressure-field  | Free-field   |                          |
| <b>Nominal Open-circuit Sensitivity</b>                                  | 1.0 mV/Pa<br>−60 dB re<br>1 V/Pa  | 50 mV/Pa<br>−26 dB re<br>1 V/Pa   | 50 mV/Pa<br>−26 dB re<br>1 V/Pa   | 47 mV/Pa<br>−27 dB re<br>1 V/Pa  | 50 mV/Pa<br>−26 dB re<br>1 V/Pa    | 4 mV/Pa<br>−48 dB re<br>1 V/Pa     | 100 mV/Pa<br>−20 dB re<br>1 V/Pa  | 12.5 mV/Pa<br>−38 dB re<br>1 V/Pa | 31.6 mV/Pa<br>−30 dB re<br>1 V/Pa                        | 50 mV/Pa<br>−26 dB re<br>1 V/Pa                        | 50 mV/Pa<br>−26 dB re<br>1 V/Pa                         | 12.5 mV/Pa<br>−38 dB re<br>1 V/Pa                       | 12.5 mV/Pa<br>−38 dB re<br>1 V/Pa                         | 12.5 mV/Pa<br>−38 dB re<br>1 V/Pa                            | 11.2 mV/Pa<br>−39 dB re<br>1 V/Pa                                  | 1.6 mV/Pa<br>−56 dB re<br>1 V/Pa            | 4 mV/Pa<br>−48 dB re<br>1 V/Pa     | 50 mV/Pa<br>−26 dB re<br>1 V/Pa                        | 0.09 mV/Pa<br>−81 dB re<br>1 V/Pa  | 50 mV/Pa<br>−26 dB re<br>1 V/Pa                                      | 50 mV/Pa<br>−26 dB re<br>1 V/Pa                                       | 1 mV/Pa<br>−60 dB re<br>1 V/Pa                        | 12.5 mV/Pa<br>−38 dB re<br>1 V/Pa  | 50 mV/Pa<br>−26 dB re<br>1 V/Pa    | 50 mV/Pa<br>−26 dB re<br>1 V/Pa    | 3.16 mV/Pa<br>−50 dB re 1 V/Pa                                     | 12.5 mV/Pa<br>−38 dB re 1 V/Pa                                    | 50 mV/Pa<br>−26 dB re<br>1 V/Pa  |                          |
| <b>Polarization Voltage</b>  | 200 V   | 200 V   | 200 V   | 200 V                            | 0 V                                | 200 V                              | 200 V   | 200 V                             | 0 V  | 0 V  | 200 V   | 200 V   | 200 V   | 200 V  | 200 V  | 200 V                                       | 200 V                              | 0 V  | 200 V                              | 0 V  | 200 V   | 0 V   | 0 V                                | 0 V                                | 0 V                                | 0 V  | 0 V   | 0 V  | 0 V                      |
| <b>Optimized Frequency Response</b>                                      | ±2 dB: 6.5 Hz to<br>140 kHz   | ±2 dB: 2.6 Hz to<br>8 kHz   | ±2 dB: 2.6 Hz to<br>18 kHz  | ±2 dB: up to<br>8 kHz            | ±2dB: 6.5 Hz to<br>16 kHz          | ±2 dB: 4 Hz to<br>100 kHz          | ±2 dB: 10 Hz to<br>10 kHz   | ±1.5 dB:<br><20 kHz               | ±1 dB: 12.5 Hz<br>to 8 kHz<br>±2 dB: 8 Hz to<br>12.5 kHz | ±1 dB: 10 Hz to<br>8 kHz<br>±2 dB: 6.3 Hz to<br>20 kHz | ±1 dB: 5 Hz to<br>10 kHz<br>±2 dB: 3.15 Hz<br>to 20 kHz | ±1 dB: 5 Hz to<br>16 kHz<br>±2 dB: 3.15 Hz<br>to 40 kHz | ±1 dB: 5 Hz to<br>12.5 kHz<br>±2 dB: 3.15 Hz<br>to 20 kHz | ±1 dB: 0.12 Hz<br>to 12.5 kHz<br>±2 dB: 0.07 Hz<br>to 20 kHz | ±1 dB: 5 Hz to<br>8 kHz <sup>†</sup><br>±2 dB: 0.3 Hz to<br>20 kHz | ±2 dB: 4 Hz to<br>70 kHz                    | ±2 dB: 4 Hz to<br>100 kHz          | ±1 dB: 10 Hz to<br>8 kHz<br>±2 dB: 6.3 Hz to<br>20 kHz | ±2 dB: 4 Hz to<br>20 kHz           | ±1 dB: 10 Hz to<br>10 kHz <sup>†</sup><br>±2 dB: 6.3 Hz to<br>16 kHz | ±1 dB: 5 Hz to<br>6.3 kHz <sup>†</sup><br>±2 dB: 3.15 Hz<br>to 10 kHz | ±2 dB: 4 Hz to<br>8 kHz<br>(−3 dB): 3 Hz to<br>70 kHz | ±2 dB: 8 Hz to<br>10 kHz           | ±2 dB: 6.5 Hz to<br>16 kHz         | ±2 dB: 3 Hz to<br>10 kHz           | ±2 dB: 4 Hz to<br>80 kHz <sup>†</sup><br>±3 dB: 3 Hz to<br>100 kHz | ±1 dB: 7 Hz to<br>12 kHz <sup>†</sup><br>±2 dB: 2 Hz to<br>20 kHz | ±1 dB: 0.04 Hz<br>to 8 kHz <sup>†</sup><br>±2 dB: 0.03 Hz<br>to 20 kHz |                          |
| <b>Lower Limiting Frequency (−3 dB)</b>                                  | 0.5 to 5 Hz   | 1 to 2 Hz   | 1 to 2 Hz   | 1 to 2 Hz                        | 0.5 to 5 Hz                        | 0.3 to 3 Hz                        | 5 to 7 Hz   | 1 to 3 Hz                         | 1 to 5 Hz  | 2 to 4 Hz  | 1 to 2 Hz   | 1 to 2 Hz   | 1 to 2 Hz   | 0.01 to 50 mHz   | 0.14 Hz  | 0.3 to 3 Hz                                 | 0.3 to 3 Hz                        | 2 to 4 Hz  | 0.3 to 3 Hz                        | 2 to 4 Hz  | 1 to 2 Hz   | 0.3 Hz to 3 Hz  | 1 to 5 Hz                          | 0.5 to 5 Hz                        | 1 to 2.4 Hz                        | 0.3 to 3 Hz  | 1 to 2 Hz   | 0.01 to 0.05 Hz  |                          |
| <b>Inherent Noise (Typical)</b>  | 43 dB(A)  | 9.5 dB(A)   | 10 dB(A)  | 9.5 dB(A)                        | 14.6 dB (A)                        | 28 dB(A)                           | −2.5 <sup>*</sup> dB(A)   | 18 dB(A)                          | 14.2 dB(A)<br>14.5 dB(Lin)                               | 14.6 dB(A)<br>15.3 dB (Lin)                            | 14.5 dB(A)<br>15.3 dB(Lin)                              | 20.0 dB(A)<br>21.4 dB(Lin)                              | 19.0 dB(A)<br>21.3 dB(Lin)                                | 19.0 dB(A)<br>21.3 dB(Lin)                                   | 20.0 dB(A)   | 30 dB(A)                                    | 28 dB(A)                           | 14.6 dB(A)<br>15.3 dB(Lin)                             | 59 dB                              | 14.6 dB  | 15.5 dB   | 30dB(A)   | 17.5 dB(A)<br>18.7 dB(Lin)         | 14.6 dB(A)                         | 16.2 dB(A)                         | 35 dB(A)   | 18.6 dB(A)<br>20.9 dB(Lin)  | 14.6 dB(A)<br>15.3 dB(Lin)   |                          |
| <b>3% Distortion Limit (Max. †)</b>                                      | 168 dB  | 146 dB  | 146 dB  | 146 dB                           | 142 dB                             | 164 dB                             | 140 dB <sup>*</sup>   | 160 dB                            | 146 dB   | 146 dB   | 148 dB  | 162 dB  | 162 dB  | 162 dB   | 162 dB   | 172 dB                                      | 164 dB                             | 146 dB   | 184 dB                             | 146 dB   | 148 dB  | 170 dB  | 160 dB                             | 142 dB                             | 146 dB                             | 164 dB   | 160 dB  | 146 dB   |                          |
| <b>3% Distortion Limit RMS (V)</b>                                       | 5.0 V   | 20.0 V  | 20.0 V  | 18.8 V                           | 12.6 V                             | 12.7 V                             | 2.0 V <sup>*</sup>  | 25.0 V                            | 12.6 V   | 20.0 V   | 25.1 V  | 31.5 V  | 31.5 V  | 31.5 V   | 28.2 V   | 12.7 V                                      | 12.7 V                             | 20.0 V   | 2.9 V                              | 20.0 V   | 25.6 V  | 5.7 V   | 25.0 V                             | 12.6 V                             | 20.0 V                             | 10.0 V   | 25.0 V  | 20.0 V   |                          |
| <b>Operating Temperature Range</b>                                       | −30 to +100 °C<br>(−22 to +212 °F)<br>Can be used up to 150 °C (302 °F) | −30 to +100 °C<br>(−22 to +212 °F)<br>Can be used up to 150 °C (302 °F) | −30 to +100 °C<br>(−22 to +212 °F)<br>Can be used up to 150 °C (302 °F) | −10 to +50 °C<br>(+30 to 122 °F) | −30 to +125 °C<br>(−22 to +257 °F) | −40 to +150 °C<br>(−40 to +302 °F) | −30 to +100 °C<br>(−22 to +212 °F)<br>Can be used up to 150 °C (302 °F) | −10 to +50 °C<br>(+30 to 122 °F)  | −30 to +125 °C<br>(−22 to +257 °F)                       | −30 to +150 °C<br>(−22 to +302 °F)                     | −30 to +150 °C<br>(−22 to +302 °F)                      | −30 to +150 °C<br>(−22 to +302 °F)                      | −30 to +150 °C<br>(−22 to +302 °F)                        | −30 to +150 °C<br>(−22 to +302 °F)                           | −30 to +150 °C<br>(−22 to +302 °F)                                 | −40 to +150 °C<br>(−40 to +302 °F)          | −40 to +150 °C<br>(−40 to +302 °F) | −30 to +150 °C<br>(−22 to +302 °F)                     | −40 to +150 °C<br>(−40 to +302 °F) | −30 to +150 °C<br>(−22 to +302 °F)                                   | −40 to +150 °C<br>(−40 to +302 °F)                                    | −40 to +150 °C<br>(−40 to +302 °F)                    | −30 to +125 °C<br>(−22 to +257 °F) | −30 to +125 °C<br>(−22 to +257 °F) | −30 to +150 °C<br>(−22 to +302 °F) | −40 to +150 °C<br>(−40 to +302 °F)                                 | −30 to +70 °C<br>(−22 to +158 °F)                                 | −30 to +150 °C<br>(−22 to +302 °F)                                     |                          |
| <b>Temperature Coefficient</b>   | −0.01 dB/°C   | −0.003 dB/°C  | −0.002 dB/°C  | −0.003 dB/°C                     | 0.005 dB/°C                        | 0.003 dB/°C                        | −0.004 dB/°C  | −0.002 dB/°C                      | +0.005 dB/°C   | −0.006 dB/°C   | −0.012 dB/°C  | −0.002 dB/°C  | −0.002 dB/°C  | −0.002 dB/°C   | −0.002 dB/°C   | 0.003 dB/°C                                 | 0.003 dB/°C                        | −0.006 dB/°C   |                                    |  | −0.006 dB/°C  | −0.015 dB/°C  | 0.008 dB/°C                        | 0.006 dB/°C                        | 0.005 dB/°C                        | −0.008 dB/°C   | 0.009 dB/°C   | 0.013 dB/°C  | −0.006 dB/kPa            |
| <b>Pressure Coefficient</b>  | −0.01 dB/kPa  | −0.016 dB/kPa   | −0.015 dB/kPa   | −0.00016 dB/kPa                  | 0.02 dB/kPa                        | −0.007 dB/kPa                      | −0.016 dB/kPa   | −0.00007 dB/kPa                   | −0.021 dB/kPa  | −0.010 dB/kPa  | −0.010 dB/kPa   | −0.007 dB/kPa   | −0.007 dB/kPa   | −0.005 dB/kPa  | −0.007 dB/kPa  | −0.003 dB/kPa                               | −0.007 dB/kPa                      | −0.010 dB/kPa  |                                    |  | −0.010 dB/kPa   | −0.008 dB/kPa   | −0.003 dB/kPa                      | −0.006 dB/kPa                      | 0.02 dB/kPa                        | 0.008 dB/kPa   | −0.007 dB/kPa   | 0.0009 dB/kPa  | −0.010 dB/kPa            |
| <b>Effect of Vibration, SPL for 1 m/s<sup>2</sup> axial acceleration</b> | 58 dB   | 67 dB   | 67 dB   | 67 dB                            | 63.5 dB                            | 60 dB                              | 60 dB   | 65 dB                             | 63.5 dB  | 62.5 dB  | 62.5 dB   | 65.5 dB   | 65.5 dB   | 65.5 dB  | 65.5 dB  | 69 dB                                       | 60 dB                              | 62.5 dB  |                                    |  | 62.5 dB   | 62.5 dB   | 69 dB                              | 65.5 dB                            | 63.5 dB                            | 62.5 dB  | 60 dB   | 65.5 dB  | 62.5 dB                  |
| <b>Effect of magnetic field, SPL for 80 A/m, 50 Hz field</b>             | 40 dB   | 18 dB   | 18 dB   | 18 dB                            | 30 dB                              | 10 dB                              | 12 dB   | 20 dB                             | 7 dB   | 6 dB   | 4 dB  | 16 dB   | 16 dB   | 16 dB  | 6 to 34 dB   | 10 dB                                       | 10 dB                              | 6 dB   |                                    |  | 6 dB  | 4 dB  | 48 dB(A)                           | 16 dB                              | 30 dB                              | 6 dB   | 10 dB   |  | 6 dB                     |
| <b>Estimated Long-term Stability at 20 °C</b>                            | <1 dB/1000 years  | <1 dB/1000 years  | <1 dB/1000 years  | <1 dB/400 years                  | <1 dB/1000 years                   | <1 dB/1000 years                   | <1 dB/250 years   | <1 dB/400 years                   | <1 dB/1000 years   | <1 dB/1000 years                                       | <1 dB/1000 years  | <1 dB/1000 years  | <1 dB/1000 years  | <1 dB/1000 years   | <1 dB/1000 years   | <1 dB/1000 years                            | <1 dB/1000 years                   | <1 dB/1000 years                                       | <1 dB/1000 years                   | <1 dB/1000 years   | <1 dB/1000 years  | <1 dB/1000 years                                      | <1 dB/1000 years                   | <1 dB/1000 years                   | <1 dB/1000 years                   | <1 dB/1000 years   | <1 dB/1000 years  | <1 dB/1000 years   | <1 dB/1000 years         |
| <b>Estimated Long-term Stability at 150 °C (dry air)</b>                 |   | >2 hr/dB  | >2 hr/dB  |                                  | >10 hr/dB                          | >100 hr/dB                         |   |                                   | >10 hr/dB  | >2 hr/dB   | >100 hr/dB  | >100 hr/dB  | >100 hr/dB  | >100 hr/dB   | >100 hr/dB   | >100 hr/dB                                  | >100 hr/dB                         | >2 hr/dB   |                                    |  | >2 hr/dB  | >100 hr/dB  | >2 hr/dB                           | >2 hr/dB                           | >10 hr/dB                          | >2 hr/dB   | >2 hr/dB  | >2 hr/dB   | >2 hr/dB                 |
| <b>Standards<sup>‡</sup></b>   | –   | D, L  | A, I  | G                                | I, K                               |                                    | –   | H                                 | I, K   | B, I, L  | B, I, L   | B, I, L, M  | E, K, M   | E, K, M  |  | F   | C                                  |  | –                                  | K  | K   | F   | K                                  | I, K                               | –                                  | C  | E, K, M   | B, I, L  |                          |
| <b>Recommended Brüel &amp; Kjær Preamplifier (Type/Item no.)</b>         | 2670 +<br>UA-0160   | 2669<br>2673 +<br>UA-0786   | 2669<br>2673 +<br>UA-0786   | 2669<br>2673 +<br>UA-0786        | 2669, 2671<br>2699, 1706           | 2683                               | 2660<br>WH-3315 +<br>WL-1302  | 2673                              | 2669, 2671<br>2699, 1706                                 | 2669, 2671<br>2699, 1706                               | 2669  | 2669  | 2669  | 2669   | 2683   | 2669 +<br>UA-0035<br>2670                   | 2669 +<br>UA-0035<br>2670          | 2669, 2671<br>2699, 1706                               | 2669 +<br>UA-0035<br>2670          | 2669, 2671<br>2699, 1706   | 2669  | 2669, 2671<br>1706 +<br>UA-0035                       | 2669, 2671<br>2699, 1706           | 2669, 2671<br>2699, 1706           | 2669, 2671<br>2699, 1706           | 2669, 2671<br>2699, 1706   | 2669, 2671<br>2699, 1706  | 2669, 2671<br>2699, 1706   | 2669, 2671<br>2699, 1706 |

\* See product data for details

† To ensure correct operation, the microphone should not be exposed to sound pressure levels exceeding the stated 3% Distortion Limit by more than 10 dB. Above this level, the output becomes heavily distorted (clipping occurs). In addition, an externally polarized microphone will temporarily lose its charge and will need some time to recover. However, even if the 3% Distortion Limit is exceeded, for example, by up to 20 dB, the microphone will not suffer permanent damage provided it is used with a Brüel & Kjær preamplifier.

‡ Standards: A = IEC 61094–4 WS1F, B = IEC 61094–4 WS2F, C = IEC 61094–4 WS3F, D = IEC 61094–4 WS1P, E = IEC 61094–4 WS2P, F = IEC 61094–4 WS3P, G = IEC 61094–1 LS1P, H = IEC 61094–1 LS2P, I = IEC 61672 Class 1, J = IEC 61672 Class 2, K = ANSI S1.4 Type 1, L = ANSI S1.4 Type 2, M = ANSI S1.12 Type M

Note: The effect of humidity is insignificant, and therefore not shown.





# CHARGE ACCELEROMETER COMPARISON TABLES

Brüel & Kjær supplies accelerometers for heavy-duty industrial use and specifically designed for special-purpose applications. These charge accelerometers are self-generating devices that do not require an external power source for operation.

Most are Uni-Gain types having a measured sensitivity within ±2% of the specified sensitivity. However, there are some variable gain types (V variants) that have a greater deviation in sensitivity: ±15%.

Uni-Gain and V types have the same specifications and long-term stability. The V type just has a relaxed sensitivity tolerance.

## Tables

There are two tables:

- Triaxial piezoelectric charge accelerometers
- Uniaxial piezoelectric charge accelerometers

These tables list key specifications for all our standard accelerometers, enabling you to get a quick overview for easier comparison and selection.

Pull out for **COMPARISON TABLES >>>**

## Uniaxial Piezoelectric Charge Accelerometers

General-purpose, High-sensitivity, High-frequency and Miniature Accelerometers

| Type No.   |                              | General Purpose                     |                                     | High Sensitivity                    |                                     |                                     |                                     | High Frequency and Miniature        |                              |                              |                              |                             |                            |                            |                            |                            |                            |                            |
|--|------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|------------------------------|------------------------------|------------------------------|-----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|----------------------------|
|  |                              | 4382*                               | 4383*                               | 4370*                               | 4381*                               | 4371*                               | 4384*                               | 8346-C                              | 4374                         | 4374-L                       | 4375*                        | 4393*                       | 4505-A                     | 4505-001                   | 4517-C                     | 4517-C-001                 | 4517-C-003                 | 4521-C                     |
| <b>GENERAL</b>   |                              |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                              |                              |                              |                             |                            |                            |                            |                            |                            |                            |
| <b>Weight (excluding cable, wherever applicable)</b>   | gram<br>oz                   | 17<br>0.6                           | 17<br>0.6                           | 54<br>1.9                           | 43<br>1.52                          | 11<br>0.39                          | 11<br>0.39                          | 176<br>6.2                          | 0.75<br>0.026                | 0.75<br>0.026                | 2.4<br>0.085                 | 2.4<br>0.085                | 4.9<br>0.17                | 4.9<br>0.17                | 0.6<br>0.021               | 1<br>0.035                 | 0.85<br>0.03               | 2.7<br>0.095               |
| <b>Charge Sensitivity (at 159.2 Hz)</b>  | pC/ms <sup>-2</sup><br>pC/g  | 3.16<br>31.0                        | 3.16<br>31.0                        | 10<br>98                            | 10<br>98                            | 1<br>9.8                            | 1<br>9.8                            | 38<br>372                           | 0.15<br>1.47                 | 0.11<br>1.08                 | 0.316<br>3.10                | 0.316<br>3.10               | 0.3<br>2.94                | 0.067<br>0.66              | 0.18<br>1.80               | 0.18<br>1.80               | 0.18<br>1.80               | 1<br>10                    |
| <b>Frequency Range (±10% limit)</b>  | Hz                           | 0.1 to 8400                         | 0.1 to 8400                         | 0.1 to 4800                         | 0.1 to 4800                         | 0.1 to 12600                        | 0.1 to 12600                        | 0.1 to 3000                         | 1 to 26000                   | 1 to 26000                   | 0.1 to 16500                 | 0.1 to 16500                | 1 to 12000                 | 1 to 9000                  | 1 to 10000                 | 1 to 20000                 | 1 to 9000                  | 1 to 9000                  |
| <b>Mounted Resonance Frequency</b>   | kHz                          | 28                                  | 28                                  | 16                                  | 16                                  | 42                                  | 42                                  | 10                                  | 85                           | 85                           | 55                           | 55                          | 45                         | 45                         | 80                         | 75                         | 30                         | 35                         |
| <b>Max. Transverse Sensitivity (at 30 Hz, 100 ms<sup>-2</sup>)</b>                               | %                            | <4                                  | <4                                  | 4                                   | <4                                  | <4                                  | <4                                  | <5                                  | <5                           | <5                           | <4                           | <4                          | <5                         | <5                         | <5                         | <5                         | <5                         | <5                         |
| <b>Transverse Resonance Frequency</b>  | kHz                          | 10                                  | 10                                  | 4                                   | 5                                   | 15                                  | 15                                  | 3.5                                 | 21                           | 21                           | 18                           | 18                          | >20                        | >20                        |                            |                            |                            |                            |
| <b>Measuring Range (±peak)</b>   | kms <sup>-2</sup><br>g       | 20<br>2000                          | 20<br>2000                          | 20<br>2000                          | 20<br>2000                          | 60<br>6000                          | 60<br>6000                          | 20<br>2000                          | 50<br>5000                   | 50<br>5000                   | 50<br>5000                   | 50<br>5000                  | 30<br>3000                 | 30<br>3000                 | 10<br>1000                 | 10<br>1000                 | 10<br>1000                 | 20<br>2000                 |
| <b>ELECTRICAL</b>  |                              |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                              |                              |                              |                             |                            |                            |                            |                            |                            |                            |
| <b>Residual Noise Level (measured with NEXUS Type 2692-001 in the specified frequency range)</b> | mms <sup>-2</sup><br>mg      | 0.6<br>0.06                         | 0.6<br>0.06                         | 0.2<br>0.02                         | 0.2<br>0.02                         | 2.4<br>0.24                         | 2.4<br>0.24                         | 1<br>0.1                            | 18.5<br>1.85                 | 18.5<br>1.85                 | 5.2<br>0.52                  | 5.2<br>0.52                 | 7.6<br>0.76                |                            | 5<br>0.5                   | 5<br>0.5                   | 5<br>0.5                   | 1.6<br>0.16                |
| <b>Capacitance (excluding cable)</b>   | pF                           | 1100                                | 1100                                | 1100                                | 1100                                | 1100                                | 1100                                | 1100                                | 800                          | 700                          | 625                          | 590                         | 1000                       | 80                         | 730                        | 730                        | 760                        | 1300                       |
| <b>Case (signal ground) Insulation to Base</b>   | MΩ                           |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                              |                              |                              |                             | >10                        | >10                        |                            |                            |                            |                            |
| <b>Min. Leakage Resistance (at 20 °C)</b>  | GΩ                           | 20                                  | 20                                  | 20                                  | 20                                  | 20                                  | 20                                  | >20                                 | 20                           | 20                           | 20                           | 20                          | >20                        | >20                        | >20                        | >20                        | >20                        | >20                        |
| <b>ENVIRONMENTAL</b>   |                              |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                              |                              |                              |                             |                            |                            |                            |                            |                            |                            |
| <b>Operating Temperature Range</b>   | °C<br>°F                     | -74 to +250<br>-101 to +482         | -74 to +250<br>-101 to +482         | -74 to +250<br>-101 to +482         | -74 to +250<br>-101 to +482         | -74 to +250<br>-101 to +482         | -74 to +250<br>-101 to +482         | -50 to +100<br>-58 to +212          | -74 to +250<br>-101 to +482  | -74 to +250<br>-101 to +482  | -74 to +250<br>-101 to +482  | -74 to +250<br>-101 to +482 | -55 to +230<br>-67 to +446 | -55 to +230<br>-67 to +446 | -51 to +177<br>-60 to +350 | -51 to +177<br>-60 to +350 | -51 to +177<br>-60 to +350 | -51 to +230<br>-60 to +446 |
| <b>Temperature Coefficient of Sensitivity</b>  | %/°C                         | 0.05 <sup>†</sup>                   | 0.05 <sup>†</sup>                   | 0.05 <sup>†</sup>                   | 0.05 <sup>†</sup>                   | 0.05 <sup>†</sup>                   | 0.05 <sup>†</sup>                   | 0.12                                | 0.11                         | 0.11                         | 0.05 <sup>†</sup>            | 0.05 <sup>†</sup>           | 0.05 <sup>†</sup>          | 0.05 <sup>†</sup>          | 0.11                       | 0.11                       | 0.11                       | 0.11                       |
| <b>Temperature Transient Sensitivity (3 Hz Low. Lim. Freq. (-3 dB, 6 dB/oct))</b>                | ms <sup>-2</sup> /°C<br>g/°F | 0.1<br>0.0055                       | 0.1<br>0.0055                       | 0.02<br>0.0011                      | 0.04<br>0.0022                      | 0.1<br>0.022                        | 0.1<br>0.022                        | 0.001<br>0.000055                   | 10<br>0.55                   | 10<br>0.55                   | 5<br>0.275                   | 5<br>0.275                  | 1<br>0.055                 | 4<br>0.227                 | 4<br>0.22                  | 4<br>0.22                  | 2<br>0.2                   | 0.55<br>0.030              |
| <b>Base Strain Sensitivity (at 250 µε in the base plane)</b>                                     | ms <sup>-2</sup> /µε<br>g/µε | 0.01<br>0.001                       | 0.01<br>0.001                       | 0.003<br>0.0003                     | 0.003<br>0.0003                     | 0.02<br>0.002                       | 0.02<br>0.002                       | 0.002<br>0.0002                     | 0.01<br>0.001                | 0.01<br>0.001                | 0.005<br>0.0005              | 0.005<br>0.0005             | 0.02<br>0.002              | 0.02<br>0.002              | 5<br>0.5                   | 5<br>0.05                  | 0.01<br>0.001              | 1<br>0.1                   |
| <b>Magnetic Sensitivity (50 Hz, 0.038 T)</b>   | ms <sup>-2</sup> /T<br>g/kG  | 1<br>0.01                           | 1<br>0.01                           | 1<br>0.01                           | 1<br>0.01                           | 4<br>0.04                           | 4<br>0.04                           | 0.5<br>0.005                        | 30<br>0.3                    | 30<br>0.3                    | 30<br>0.3                    | 30<br>0.3                   | 5<br>0.05                  | 5<br>0.05                  | 5.6<br>0.056               | 5<br>0.05                  | 5<br>0.05                  | 6<br>0.06                  |
| <b>Max. Non-destructive Shock (± peak)</b>   | kms <sup>-2</sup><br>g       | 50<br>5000                          | 50<br>5000                          | 20<br>2000                          | 20<br>2000                          | 200<br>20000                        | 200<br>20000                        | 50<br>5000                          | 250<br>25000                 | 250<br>25000                 | 250<br>25000                 | 250<br>25000                | 30<br>3000                 | 30<br>3000                 | 50<br>5000                 | 50<br>5000                 | 50<br>5000                 | 20<br>2000                 |
| <b>MECHANICAL</b>  |                              |                                     |                                     |                                     |                                     |                                     |                                     |                                     |                              |                              |                              |                             |                            |                            |                            |                            |                            |                            |
| <b>Case Material</b>   |                              | Titanium ASTM Grade 2               | Titanium ASTM Grade 2               | Stainless Steel AISI 316            | Titanium ASTM Grade 2               | Titanium ASTM Grade 2               | Titanium ASTM Grade 2               | Stainless Steel AISI 316            | Titanium ASTM Grade 2        | Titanium ASTM Grade 3        | Titanium ASTM Grade 2        | Titanium ASTM Grade 2       | Titanium ASTM Grade 2      | Titanium ASTM Grade 2      | Titanium                   | Titanium                   | Anodized Aluminium         | Titanium Alloy             |
| <b>Piezoelectric Sensing Element</b>   |                              | PZ 23                               | PZ 23                               | PZ 23                               | PZ 23                               | PZ 23                               | PZ 23                               | PZ 27                               | PZ 27                        | PZ 23                        | PZ 23                        | PZ 23                       | PZ 23                      | PZ 101                     | Ceramic                    | Ceramic                    | Ceramic                    | Ceramic                    |
| <b>Construction</b>  |                              | DeltaShear™                         | DeltaShear™                         | Delta-Shear™                        | DeltaShear™                         | DeltaShear™                         | DeltaShear™                         | DeltaShear™                         | Planar Shear                 | Planar Shear                 | DeltaShear™                  | DeltaShear™                 | ThetaShear™                | ThetaShear™                | Planar Shear               | Planar Shear               | Planar Shear               | Planar Shear               |
| <b>Sealing</b>   |                              | Welded                              | Welded                              | Welded                              | Welded                              | Welded                              | Welded                              | Hermetic                            | Sealed                       | Sealed                       | Welded                       | Welded                      | Welded                     | Welded                     | Hermetic                   | Hermetic                   | Epoxy sealed               | Hermetic                   |
| <b>Electrical Connector</b>  |                              | 10-32 UNF-2A                        | 10-32 UNF-2A                        | 10-32 UNF-2A                        | 10-32 UNF-2A                        | 10-32 UNF-2A                        | 10-32 UNF-2A                        | 10-32 UNF-2A                        | Integral cable, 10-32 UNF-2B | Integral cable, 10-32 UNF-2B | Integral cable, 10-32 UNF-2B | M3                          | 10-32 UNF-2A               | 10-32 UNF-2A               | Coaxial 3-56               | Coaxial 3-56               | Coaxial 3-56               | M3                         |
| <b>Mounting</b>  |                              | 10-32 UNF-2B × 3.2 mm threaded hole | 10-32 UNF-2B × 3.2 mm threaded hole | 10-32 UNF-2B × 3.2 mm threaded hole | 10-32 UNF-2B × 3.2 mm threaded hole | 10-32 UNF-2B × 3.2 mm threaded hole | 10-32 UNF-2B × 3.2 mm threaded hole | 10-32 UNF-2B × 4.5 mm threaded hole | Adhesive                     | Adhesive                     | M3 × 1.6 mm threaded hole    | M3 × 2.2 mm threaded hole   | Integral 10-32 UNF stud    | Integral 10-32 UNF stud    | Adhesive                   | Adhesive                   | Adhesive                   | Insulated M2 screw         |

\* Also available as V type

† In the temperature range -25 to +125 °C

Industrial, Structural, Modal, Shock, Crash Test and Reference Accelerometers

| Type No.   | Industrial           |  |                          |                | Structural and Modal      |                           |                           |                           | Shock and Automotive Crash Test | Reference                              |  |  |
|--|----------------------|--|--------------------------|----------------|---------------------------|---------------------------|---------------------------|---------------------------|---------------------------------|--|--|--|
|  | 4391*                | 8315                                   | 8347-C                   | 4500-A         | 4501-A                    | 4507-C                    | 4508-C                    | 8309                      | 8305                            | 8305-001                               |  |  |
| <b>GENERAL</b>   |                      |  |                          |                |                           |                           |                           |                           |                                 |  |  |  |
| <b>Weight (excluding cable, wherever applicable)</b>   | gram                 | 16                                     | 62                       | 60             | 4.1                       | 4.0                       | 4.5                       | 4.5                       | 3                               | 40                                     | 26                                     |  |
|  | oz                   | 0.56                                   | 2.18                     | 2.1            | 0.145                     | 0.141                     | 0.16                      | 0.16                      | 0.105                           | 0.58                                   | 0.92                                   |  |
| <b>Charge Sensitivity (at 159.2 Hz)</b>  | pC/ms <sup>-2</sup>  | 1                                      | 10                       | 1              | 0.316                     | 0.316                     | 0.45                      | 0.45                      | 0.004                           | 0.12                                   | 0.12                                   |  |
|  | pC/g                 | 9.8                                    | 98                       | 9.8            | 3.10                      | 3.10                      | 4.41                      | 4.41                      | 0.04                            | 1.18                                   | 1.18                                   |  |
| <b>Frequency Range (±10% limit)</b>  | Hz                   | 0.1 to 10000                           | 1 to 10000               | 1 to 12800     | 1 to 15000                | 1 to 10000                | 0.1 to 6000               | 0.1 to 8000               | 1 to 54000                      | 0.2 to 4400 (±2%)<br>0.2 to 3100 (±1%) | 0.2 to 4400 (±2%)<br>0.2 to 3100 (±1%) |  |
| <b>Mounted Resonance Frequency</b>   | kHz                  | 40                                     | 28                       | 39             | 45                        | 30                        | 18                        | 25                        | 180                             | 38                                     | 34                                     |  |
| <b>Max. Transverse Sensitivity (at 30 Hz, 100 ms<sup>-2</sup>)</b>                               | %                    | <4                                     | <3                       | <3             | <5                        | <5                        | <5                        | <5                        | <5                              | <2                                     | <2                                     |  |
| <b>Transverse Resonance Frequency</b>  | kHz                  | 12                                     | 9.4                      | 17             | >20                       | >20                       | 18                        | 18                        | 28                              |  |  |  |
| <b>Measuring Range (± peak)</b>  | kms <sup>-2</sup>    | 20                                     | 20                       | 10             | 30                        | 30                        | 20                        | 20                        | 150                             | 10                                     | 10                                     |  |
|  | g                    | 2000                                   | 2000                     | 1000           | 3000                      | 3000                      | 2000                      | 2000                      | 15000                           | 1000                                   | 1000                                   |  |
| <b>ELECTRICAL</b>  |                      |  |                          |                |                           |                           |                           |                           |                                 |  |  |  |
| <b>Residual Noise Level (measured with NEXUS Type 2692-001 in the specified frequency range)</b> | mms <sup>-2</sup>    | 2.3                                    | 18.6                     |                | 7.6                       | 7.6                       | 1.7                       | 1.8                       | 230                             |  |  |  |
|  | mg                   | 0.23                                   | 1.86                     |                | 0.76                      | 0.76                      | 0.17                      | 0.18                      | 23                              |  |  |  |
| <b>Capacitance (excluding cable)</b>   | pF                   | 1100                                   |                          | 540            | 1000                      | 1000                      | 360                       | 360                       | 100                             | 180                                    | 70                                     |  |
| <b>Case (signal ground) Insulation to Base</b>   | MΩ                   | >100                                   |                          | >100           | >10                       | >10                       |                           |                           |                                 | Signal ground                          | Signal ground                          |  |
| <b>Min. Leakage Resistance (at 20 °C)</b>  | GΩ                   | >20                                    | >10                      |                | >20                       | >20                       | >20                       | >20                       | >20                             | 1000                                   | 1000                                   |  |
| <b>ENVIRONMENTAL</b>   |                      |  |                          |                |                           |                           |                           |                           |                                 |  |  |  |
| <b>Operating Temperature Range</b>   | °C                   | -60 to +180                            | -53 to +260              | -196 to +482   | -55 to +175               | -55 to +175               | -74 to +250               | -74 to +250               | -74 to +180                     | -74 to +200                            | -74 to +200                            |  |
|  | °F                   | -76 to +356                            | -63.4 to +500            | -321 to +900   | -67 to +347               | -67 to +347               | -101 to +482              | -101 to +482              | -101 to +356                    | -101 to +392                           | -101 to +392                           |  |
| <b>Temperature Coefficient of Sensitivity</b>  | %/°C                 | 0.05‡                                  | ±10%, from -53 to +125°C | 0.03           | 0.05‡                     | 0.1‡                      | 0.1‡                      | 0.1‡                      | 0.043‡                          | -0.02‡                                 | -0.02‡                                 |  |
| <b>Temperature Transient Sensitivity (3 Hz Low. Lim. Freq. (-3 dB, 6 dB/oct))</b>                | ms <sup>-2</sup> /°C | 0.2                                    | 0.09*                    | 1.5            | 0.4                       | 0.4                       | 0.2                       | 0.6                       | 400                             | 0.50                                   | 0.50                                   |  |
|  | g/°F                 | 0.011                                  | 0.055                    | 0.083          | 0.022                     | 0.022                     | 0.011                     | 0.033                     | 22                              | 0.028                                  | 0.028                                  |  |
| <b>Base Strain Sensitivity (at 250 µε in the base plane)</b>                                     | ms <sup>-2</sup> /µε | 0.005                                  | 0.008                    | 0.02           | 0.001†                    | 0.001††                   | 0.005                     | 0.005                     | 2                               | Top: 0.01<br>Base: 0.003               | Top: 0.01<br>Base: 0.003               |  |
|  | g/µε                 | 0.0005                                 | 0.0008                   | 0.002          | 0.0001                    | 0.0001                    | 0.0005                    | 0.0005                    | 0.2                             | Top: 0.001<br>Base: 0.0003             | Top: 0.001<br>Base: 0.0003             |  |
| <b>Magnetic Sensitivity (50 Hz, 0.038 T)</b>   | ms <sup>-2</sup> /T  | 4                                      | 4                        | 20             | 2                         | 2                         | 1                         | 1                         | 20                              | 1                                      | 1                                      |  |
|  | g/kG                 | 0.04                                   | 0.04                     | 0.2            | 0.02                      | 0.02                      | 0.01                      | 0.01                      | 0.2                             | 0.01                                   | 0.01                                   |  |
| <b>Max. Non-destructive Shock (± peak)</b>   | kms <sup>-2</sup>    | 20                                     | 20                       | 50             | 30                        | 30                        | 50                        | 50                        | 1000                            | 10                                     | 10                                     |  |
|  | g                    | 2000                                   | 2000                     | 5000           | 3000                      | 3000                      | 5000                      | 5000                      | 100000                          | 1000                                   | 1000                                   |  |
| <b>MECHANICAL</b>  |                      |  |                          |                |                           |                           |                           |                           |                                 |  |  |  |
| <b>Case Material</b>   |                      | Titanium ASTM Grade 2                  | Stainless Steel 316 L    | Inconel® 600   | Anodized Aluminium        | Anodized Aluminium        | Titanium ASTM Grade 2     | Titanium ASTM Grade 2     | Stainless Steel AISI 316        | Stainless Steel AISI 316               | Stainless Steel AISI 316               |  |
| <b>Piezoelectric Sensing Element</b>   |                      | PZ 23                                  | Piezite P-8*             | PZ 101         | PZ 23                     | PZ 23                     | PZ 23                     | PZ 23                     | PZ 46                           | Quartz                                 | Quartz                                 |  |
| <b>Construction</b>  |                      | DeltaShear™                            | Shear                    | Shear          | ThetaShear™               | ThetaShear™               | ThetaShear™               | ThetaShear™               | Compression                     | Compression                            | Compression                            |  |
| <b>Sealing</b>   |                      | Welded                                 | Hermetic                 | Hermetic       | Welded                    | Welded                    | Welded                    | Welded                    | Epoxy sealed                    | Hermetic                               | Hermetic                               |  |
| <b>Electrical Connector</b>  |                      | 7/16-28 UNF-2A                         | 2-pin TNC                | 2-pin TNC      | 10-32 UNF-2A              | 10-32 UNF-2A              | 10-32 UNF-2A              | 10-32 UNF-2A              | Integral cable, 10-32           | 10-32 UNF                              | 10-32 UNF                              |  |
| <b>Mounting</b>  |                      | 10-32 UNF-2B<br>× 3.2 mm threaded hole | ARINC (3 × M4)           | ARINC (3 × M4) | Mounting clip or Adhesive | Mounting clip or Adhesive | Mounting clip or Adhesive | Mounting clip or Adhesive | Integral M5 stud                | 10-32 UNF threaded hole                | 10-32 UNF threaded hole                |  |

\* With 1 Hz high-pass filter  
† Mounted in mounting clip

Triaxial Piezoelectric Charge Accelerometers

| Type No.   | General Purpose      |   |   |   |   |
|--|----------------------|---|---|---|---|
|  | 4326-A               | 4326-A-001                                    | 4326-001*                                     | 4321†   |   |
| <b>GENERAL</b>   |                      |   |   |   |   |
| <b>Weight (excluding cable, wherever applicable)</b>   | gram                 | 13  | 17  | 17  | 55  |
|  | oz                   | 0.46  | 0.6   | 0.6   | 1.94  |
| <b>Charge Sensitivity (at 159.2 Hz)</b>  | pC/ms <sup>-2</sup>  | 0.316   | 0.316   | 0.316   | 1   |
|  | pC/g                 | 3.100   | 3.100   | 3.100   | 9.8   |
| <b>Frequency Range (±10% limit)</b>  | Hz                   | X: 1 to 9000<br>Y: 1 to 8000<br>Z: 1 to 16000 | X: 1 to 9000<br>Y: 1 to 8000<br>Z: 1 to 16000 | X: 1 to 9000<br>Y: 1 to 8000<br>Z: 1 to 16000 | X: 0.1 to 12000<br>Y: 0.1 to 12000<br>Z: 0.1 to 12000 |
|  |                      | X: 27<br>Y: 24<br>Z: 48                       | X: 27<br>Y: 24<br>Z: 48                       | X: 27<br>Y: 24<br>Z: 48                       | X: 40<br>Y: 40<br>Z: 40                               |
| <b>Mounted Resonance Frequency</b>   | kHz                  |   |   |   |   |
| <b>Max. Transverse Sensitivity (at 30 Hz, 100 ms<sup>-2</sup>)</b>                               | %                    | <5  | <5  | <5  | <4†   |
| <b>Transverse Resonance Frequency</b>  | kHz                  | X: >20<br>Y: >20<br>Z: >20                    | X: >20<br>Y: >20<br>Z: >20                    | X: >20<br>Y: >20<br>Z: >20                    | X: 14<br>Y: 14<br>Z: 14                               |
|  |                      |   |   |   |   |
| <b>Measuring Range (± peak)</b>  | kms <sup>-2</sup>    | 30  | 30  | 30  | 5   |
|  | g                    | 3000  | 3000  | 3000  | 500   |
| <b>ELECTRICAL</b>  |                      |   |   |   |   |
| <b>Residual Noise Level (measured with NEXUS Type 2692-001 in the specified frequency range)</b> | mms <sup>-2</sup>    | 3   | 5.6   | 5.6   | 2.3   |
|  | mg                   | 0.3   | 0.56  | 0.56  | 0.23  |
| <b>Capacitance (excluding cable)</b>   | pF                   | 1000  | 1000  | 1000  | 1100  |
| <b>Case (signal ground) insulation to base</b>   | MΩ                   | >10   | >10   | >10   |   |
| <b>Min. Leakage Resistance (at 20 °C)</b>  | GΩ                   | >20   | >20   | >20   | >20   |
| <b>ENVIRONMENTAL</b>   |                      |   |   |   |   |
| <b>Operating Temperature Range</b>   | °C                   | -55 to +175                                   | -55 to +230                                   | -55 to +230                                   | -74 to +250   |
|  | °F                   | -67 to +347                                   | -67 to +446                                   | -67 to +446                                   | -101 to +482  |
| <b>Temperature Coefficient of Sensitivity</b>  | %/°C                 |   | X and Y: 0.08**, Z: 0.05**                    |   | 0.5**   |
| <b>Temperature Transient Sensitivity (3 Hz Low-Limited Freq. (-3 dB, 6 dB/oct))</b>              | ms <sup>-2</sup> /°C | 0.3   | 0.3   | 0.3   | 0.4   |
|  | g/°F                 | 0.0165  | 0.0165  | 0.0165  | 0.022   |
| <b>Base Strain Sensitivity (at 250 µε in base plane )</b>  | ms <sup>-2</sup> /µε | 0.002††                                       | 0.002††                                       | 0.002††                                       | 0.2   |
|  | g/µε                 | 0.0002  | 0.0002  | 0.0002  | 0.02  |
| <b>Magnetic Sensitivity (50 Hz, 0.038 T)</b>   | ms <sup>-2</sup> /T  | 5   | 5   | 5   | 4   |
|  | g/kG                 | 0.05  | 0.05  | 0.05  | 0.04  |
| <b>Max. Non-destructive Shock (± peak)</b>   | kms <sup>-2</sup>    | 30  | 30  | 30  | 10  |
|  | g                    | 3000  | 3000  | 3000  | 1000  |
| <b>MECHANICAL</b>  |                      |   |   |   |   |
| <b>Case Material</b>   |                      | Anodized Aluminium                            | Titanium ASTM Grade 2                         | Titanium ASTM Grade 2                         | Titanium ASTM Grade 2                                 |
| <b>Piezoelectric Sensing Element</b>   |                      | PZ 23   | PZ 23   | PZ 23   | PZ 23   |
| <b>Construction</b>  |                      | ThetaShear™                                   | ThetaShear™                                   | ThetaShear™                                   | DeltaShear™   |
| <b>Sealing</b>   |                      | Welded  | Welded  | Welded  | Sealed  |
| <b>Electrical Connector</b>  |                      | 3 × 10-32 UNF-2A                              | 3 × 10-32 UNF-2A                              | 3 × 10-32 UNF-2A                              | 3 × 10-32 UNF-2A                                      |
| <b>Mounting</b>  |                      | Mounting clip, adhesive, M2 screws or M3 stud | Mounting clip, adhesive, M2 screws or M3 stud | Mounting clip, adhesive, M2 screws or M3 stud | 10-32 UNF × 5 mm threaded hole, M4 screw              |

\* Dielectric rigidity: >1000 V  
† Also available as V type  
‡ Transverse sensitivity of V type is <5%  
\*\* In the temperature range -25 to +125 °C  
†† Mounted in mounting clip

# CCLD ACCELEROMETER COMPARISON TABLES

## Uniaxial Piezoelectric CCLD Accelerometers

Brüel & Kjær's CCLD accelerometers, power supplies, front ends and accessories offer an unrivalled degree of reliability and accuracy to help safeguard the integrity of your measurement data.

### Variants

There are three variants of CCLD accelerometers:

- B types: Accelerometers with built-in TEDS (transducer electronic data sheets)
- S types: Available as a set consisting of an accelerometer, cable and mounting studs in a case
- V types: Variable gain accelerometers that have a greater deviation in sensitivity of ±15%

Uni-Gain and variable gain accelerometers have the same specifications and long-term stability. V types just have a relaxed sensitivity tolerance.

### Tables

There are three tables:

- Industrial piezoelectric CCLD accelerometers
- Uniaxial piezoelectric CCLD accelerometers
- Triaxial piezoelectric CCLD accelerometers

These tables list key specifications for all our standard accelerometers, enabling you to get a quick overview for easier comparison and selection.

[Pull out for COMPARISON TABLES >>>](#)

| Type No.  |                                       | 4507                   | 4507-B                | 4507-001              | 4507-B-001            | 4507-002              | 4507-B-002            | 4507-B-003*           | 4507-B-004  | Structural and Modal  |                       | 4508                  | 4508-B                | 4508-001              | 4508-B-001            | 4508-002              | 4508-B-002            | 4508-B-003*           | 4508-B-004            |           |
|---|---------------------------------------|------------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|---|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------|
| <b>GENERAL</b>  |                                       |                        |                       |                       |                       |                       |                       |                       |   |                       |                       |                       |                       |                       |                       |                       |                       |                       |                       |           |
| Weight (excluding cable, wherever applicable)   | gram<br>oz                            | 4.8<br>0.17            | 4.8<br>0.17           | 4.8<br>0.17           | 4.8<br>0.17           | 4.8<br>0.17           | 4.8<br>0.17           | 4.9<br>0.17           | 4.6<br>0.16   | 4.6<br>0.16           | 4.6<br>0.16           | 4.8<br>0.17           | 4.8<br>0.17           | 4.8<br>0.17           | 4.8<br>0.17           | 4.8<br>0.17           | 4.8<br>0.17           | 4.9<br>0.17           | 4.8<br>0.17           |           |
| Voltage Sensitivity<br>(at 159.2 Hz and 4 mA supply current)                          | mV/ms <sup>-2</sup>                   | 10                     | 10                    | 1                     | 1                     | 100                   | 100                   | 10                    | 10  | 100                   | 50                    | 10                    | 10                    | 1                     | 1                     | 100                   | 100                   | 10                    | 50                    |           |
|   | mV/g                                  | 98                     | 98                    | 9.8                   | 9.8                   | 980                   | 980                   | 98                    | 98  | 980                   | 490                   | 98                    | 98                    | 9.8                   | 9.8                   | 980                   | 980                   | 98                    | 490                   |           |
| Frequency Range   | Amplitude (±10%)                      | 0.3 to 6000            | 0.3 to 6000           | 0.1 to 6000           | 0.1 to 6000           | 0.4 to 6000           | 0.4 to 6000           | 0.3 to 6000           | 0.3 to 6000   | 0.4 to 6000           | 0.2 to 6000           | 0.3 to 8000           | 0.3 to 8000           | 0.1 to 8000           | 0.1 to 8000           | 0.4 to 8000           | 0.4 to 8000           | 0.3 to 8000           | 0.2 to 8000           |           |
|   | Phase (±5°)                           | 2 to 5000              | 2 to 5000             | 0.5 to 5000           | 0.5 to 5000           | 2 to 5000             | 2 to 5000             | 2 to 5000             | 2 to 5000   | 2 to 5000             | 2 to 5000             | 1 to 5000             | 2 to 5000             | 2 to 5000             | 0.5 to 5000           | 0.5 to 5000           | 2 to 5000             | 2 to 5000             | 2 to 5000             | 1 to 5000 |
| Mounted Resonance Frequency   | kHz                                   | 18                     | 18                    | 18                    | 18                    | 18                    | 18                    | 18                    | 18  | 18                    | 18                    | 25                    | 25                    | 25                    | 25                    | 25                    | 25                    | 25                    | 25                    |           |
| Max. Transverse Sensitivity (at 30 Hz, 100 ms <sup>-2</sup> )                         | %                                     | <5                     | <5                    | <5                    | <5                    | <5                    | <5                    | <5                    | <5  | <5                    | <5                    | <5                    | <5                    | <5                    | <5                    | <5                    | <5                    | <5                    | <5                    |           |
| Transverse Resonance Frequency  | kHz                                   | >18                    | >18                   | >18                   | >18                   | >18                   | >18                   | >18                   | >18   | >18                   | >18                   | >18                   | >18                   | >18                   | >18                   | >18                   | >18                   | >18                   | >18                   |           |
| Measuring range (± peak)  | kms <sup>-2</sup>                     | 0.7                    | 0.7                   | 7                     | 7                     | 0.07                  | 0.07                  | 0.7                   | 0.7   | 0.07                  | 0.14                  | 0.7                   | 0.7                   | 7                     | 7                     | 0.07                  | 0.07                  | 0.7                   | 0.15                  |           |
|   | g                                     | 70                     | 70                    | 700                   | 700                   | 7                     | 7                     | 70                    | 70  | 7                     | 14                    | 70                    | 70                    | 700                   | 700                   | 7                     | 7                     | 71                    | 14                    |           |
| TEDS  |                                       | No                     | Yes                   | No                    | Yes                   | No                    | Yes                   | Yes                   | Yes   | Yes                   | Yes                   | No                    | Yes                   | No                    | Yes                   | No                    | Yes                   | Yes                   | Yes                   |           |
| <b>ELECTRICAL</b>   |                                       |                        |                       |                       |                       |                       |                       |                       |   |                       |                       |                       |                       |                       |                       |                       |                       |                       |                       |           |
| Bias Voltage  | at 25 °C and 4 mA                     | V                      | 12 ±1                 | 13 ±1                 | 12 ±1                 | 13 ±1                 | 12 ±2                 | 13 ±2                 | 13 ±1   | 13 ±1                 | 13 ±2                 | 13 ±2                 | 12 ±1                 | 13 ±1                 | 12 ±1                 | 13 ±1                 | 12 ±2                 | 13 ±2                 | 13 ±1                 | 13 ±2     |
|   | at full temperature and current range | V                      | 12 ±1                 | 13 ±1                 | 12 ±1                 | 13 ±1                 | 12 ±2                 | 13 ±2                 | 13 ±1   | 13 ±1                 | 13 ±2                 | 13 ±2                 | 12 ±1                 | 13 ±1                 | 12 ±1                 | 13 ±1                 | 12 ±2                 | 13 ±2                 | 13 ±1                 | 13 ±2     |
| Power Supply  | Constant current                      | mA                     | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20   | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20               | 2 to 20   |
|   | Unloaded supply voltage               | V                      | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30  | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30              | 24 to 30  |
| Output Impedance  | Ω                                     | 2                      | 30                    | 2                     | 30                    | 2                     | 30                    | 30                    | 30  | 30                    | 30                    | 2                     | 30                    | 2                     | 30                    | 2                     | 30                    | 30                    | 30                    |           |
| Start-up time (to final bias ±10%)  | s                                     | <5                     | <5                    | <50                   | <50                   | <5                    | <5                    | <5                    | <5  | <5                    | <5                    | <5                    | <5                    | <5                    | <50                   | <50                   | <5                    | <5                    | <5                    |           |
| Residual Noise (inherent RMS broadband noise in the specified frequency range)        | µV                                    | <35                    | <35                   | <8                    | <8                    | <150                  | <150                  | <35                   | <35   | <150                  | <80                   | <35                   | <35                   | <8                    | <8                    | <150                  | <150                  | <35                   | <80                   |           |
|   | µg                                    | <350                   | <350                  | <800                  | <800                  | <150                  | <150                  | <350                  | <350  | <150                  | <160                  | <350                  | <350                  | <800                  | <800                  | <150                  | <150                  | <350                  | <160                  |           |
| Noise (spectral)  | 10 Hz                                 | mms <sup>-2</sup> /√Hz | 0.15 (15)             | 0.15 (15)             | 0.25 (25)             | 0.25 (25)             | 0.08 (8)              | 0.08 (8)              | 0.15 (15)   | 0.15 (15)             | 0.08 (8)              | 0.08 (8)              | 0.15 (15)             | 0.15 (15)             | 0.25 (25)             | 0.25 (25)             | 0.08 (8)              | 0.08 (8)              | 0.15 (15)             |           |
|   | 100 Hz                                | µg/√Hz                 | 0.035 (3.5)           | 0.035 (3.5)           | 0.06 (6)              | 0.06 (6)              | 0.02 (2)              | 0.02 (2)              | 0.035 (3.5)   | 0.035 (3.5)           | 0.02 (2)              | 0.02 (2)              | 0.035 (3.5)           | 0.035 (3.5)           | 0.06 (6)              | 0.06 (6)              | 0.02 (2)              | 0.02 (2)              | 0.035 (3.5)           |           |
|   | 1000 Hz                               | (µg/√Hz)               | 0.02 (2)              | 0.02 (2)              | 0.035 (3.5)           | 0.035 (3.5)           | 0.01 (1)              | 0.01 (1)              | 0.02 (2)  | 0.02 (2)              | 0.01 (1)              | 0.01 (1)              | 0.02 (2)              | 0.02 (2)              | 0.035 (3.5)           | 0.035 (3.5)           | 0.01 (1)              | 0.01 (1)              | 0.02 (2)              |           |
| Insulation Resistance (signal ground to case)   | MΩ                                    |                        |                       |                       |                       |                       |                       |                       |   |                       |                       |                       |                       |                       |                       |                       |                       |                       |                       |           |
| <b>ENVIRONMENTAL</b>  |                                       |                        |                       |                       |                       |                       |                       |                       |   |                       |                       |                       |                       |                       |                       |                       |                       |                       |                       |           |
| Operating Temperature Range   | °C                                    | -54 to +121            | -54 to +121           | -54 to +121           | -54 to +121           | -54 to +100           | -54 to +100           | -54 to +121           | -54 to +121   | -54 to +100           | -54 to +100           | -54 to +121           | -54 to +121           | -54 to +121           | -54 to +121           | -54 to +100           | -54 to +100           | -54 to +121           | -54 to +100           |           |
|   | °F                                    | -65 to +250            | -65 to +250           | -65 to +250           | -65 to +250           | -65 to +212           | -65 to +212           | -65 to +250           | -65 to +250   | -65 to +212           | -65 to +212           | -65 to +250           | -65 to +250           | -65 to +250           | -65 to +250           | -65 to +212           | -65 to +212           | -65 to +250           | -65 to +212           |           |
| Temperature Coefficient of Sensitivity  | %/°C                                  | 0.09                   | 0.09                  | 0.09                  | 0.09                  | 0.18                  | 0.18                  | 0.09                  | 0.09  | 0.18                  | 0.18                  | 0.06                  | 0.06                  | 0.06                  | 0.12                  | 0.12                  | 0.06                  | 0.06                  | 0.12                  |           |
| Temperature Transient Sensitivity<br>(3 Hz Lower Limiting Freq. (-3 dB, 6 dB/octave)) | ms <sup>-2</sup> /°C                  | 0.2                    | 0.2                   | 0.2                   | 0.2                   | 0.2                   | 0.2                   | 0.2                   | 0.2   | 0.2                   | 0.2                   | 0.3                   | 0.3                   | 0.3                   | 0.3                   | 0.3                   | 0.3                   | 0.3                   | 0.3                   |           |
|   | g/°F                                  | 0.011                  | 0.011                 | 0.011                 | 0.011                 | 0.011                 | 0.011                 | 0.011                 | 0.011   | 0.011                 | 0.011                 | 0.0165                | 0.0165                | 0.0165                | 0.0165                | 0.0165                | 0.0165                | 0.0165                | 0.0165                |           |
| Magnetic Sensitivity (50 Hz, 0.038 T)   | ms <sup>-2</sup> /T                   | 3                      | 3                     | 3                     | 3                     | 3                     | 3                     | 3                     | 3   | 3                     | 3                     | 3                     | 3                     | 3                     | 3                     | 3                     | 3                     | 3                     | 3                     |           |
|   | g/kG                                  | 0.03                   | 0.03                  | 0.03                  | 0.03                  | 0.03                  | 0.03                  | 0.03                  | 0.03  | 0.03                  | 0.03                  | 0.03                  | 0.03                  | 0.03                  | 0.03                  | 0.03                  | 0.03                  | 0.03                  | 0.03                  |           |
| Base Strain Sensitivity (at 250 µε in base plane)                                     | ms <sup>-2</sup> /µε                  | 0.005†                 | 0.005†                | 0.005†                | 0.005†                | 0.005†                | 0.005†                | 0.005†                | 0.005†  | 0.005†                | 0.005†                | 0.005†                | 0.005†                | 0.005†                | 0.005†                | 0.005†                | 0.005†                | 0.005†                | 0.005†                |           |
|   | g/µε                                  | 0.0005†                | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†   | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†               | 0.0005†               |           |
| Max. Non-destructive Shock (± peak)   | kms <sup>-2</sup>                     | 50                     | 50                    | 50                    | 50                    | 50                    | 50                    | 50                    | 50  | 50                    | 50                    | 50                    | 50                    | 50                    | 50                    | 50                    | 50                    | 50                    | 50                    |           |
|   | g                                     | 5000                   | 5000                  | 5000                  | 5000                  | 5000                  | 5000                  | 5000                  | 5000  | 5000                  | 5000                  | 5000                  | 5000                  | 5000                  | 5000                  | 5000                  | 5000                  | 5000                  | 5000                  |           |
| <b>MECHANICAL</b>   |                                       |                        |                       |                       |                       |                       |                       |                       |   |                       |                       |                       |                       |                       |                       |                       |                       |                       |                       |           |
| Case Material   |                                       | Titanium ASTM Grade 2  | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2   | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 | Titanium ASTM Grade 2 |           |
| Piezoelectric Sensing Element   |                                       | PZ 23                  | PZ 23                 | PZ 23                 | PZ 23                 | PZ 27                 | PZ 27                 | PZ 23                 | PZ 23   | PZ 27                 | PZ 27                 | PZ 23                 | PZ 23                 | PZ 23                 | PZ 23                 | PZ 27                 | PZ 27                 | PZ 23                 | PZ 27                 |           |
| Construction  |                                       | ThetaShear™            | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™   | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™           | ThetaShear™           |           |
| Sealing   |                                       | Hermetic               | Hermetic              | Hermetic              | Hermetic              | Hermetic              | Hermetic              | Hermetic              | Hermetic  | Hermetic              | Hermetic              | Hermetic              | Hermetic              | Hermetic              | Hermetic              | Hermetic              | Hermetic              | Hermetic              | Hermetic              |           |
| Electrical Connector  |                                       | 10-32 UNF-2A           | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A  | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          | 10-32 UNF-2A          |           |
| Mounting  |                                       | Clip or Adhesive       | Clip or Adhesive      | Clip or Adhesive      | Clip or Adhesive      | Clip or Adhesive      | Clip or Adhesive      | Adhesive              | 3 pairs of slots for clip mounting form pseudo-triaxial measurements; Adhesive mounting also possible |                       |                       | Clip or Adhesive      | Clip or Adhesive      | Clip or Adhesive      | Clip or Adhesive      | Clip or Adhesive      | Clip or Adhesive      | Adhesive              | Clip or Adhesive      |           |

\* Adhesive-mount version of B variant

† Mounted on adhesive tape 0.09 mm thick

General-purpose and 360°Mounting Uniaxial CCLD Accelerometers

| Type No.  |   | Miniature and High Frequency       |                                 |                                 |                                  |                                  |                                 |                                 |                                  |                                  |                                 |                                 |                                  |   |                                     | General Purpose                                     |   |   |   |                                      |                                      | 360° Mounting                        |   |                                      |                                      |                                    |                                    |
|---|---|------------------------------------|---------------------------------|---------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|----------------------------------|---------------------------------|---------------------------------|----------------------------------|---|-------------------------------------|---|---|---|---|--------------------------------------|--------------------------------------|--------------------------------------|---|--------------------------------------|--------------------------------------|------------------------------------|------------------------------------|
|   |   | 4517                               | 4517-002                        | 4516                            | 4516-001                         | 4518                             | 4518-002                        | 4518-001                        | 4518-003                         | 4519                             | 4519-002                        | 4519-001                        | 4519-003                         | 4397-A                                    | 4394*                               | 4534-B  | 4534-B-001  | 4534-B-002  | 4534-B-004  | 4533-B                               | 4533-B-001                           | 4533-B-002                           | 4533-B-004                              | 4521                                 | 4523                                 | 4511-001                           | 4511-006                           |
| <b>GENERAL</b>  |   |                                    |                                 |                                 |                                  |                                  |                                 |                                 |                                  |                                  |                                 |                                 |                                  |   |                                     |   |   |   |   |                                      |                                      |                                      |   |                                      |                                      |                                    |                                    |
| <b>Weight (excluding cable, wherever applicable)</b>                                      | gram<br>oz                                      | 0.65<br>0.02                       | 0.7<br>0.025                    | 1.5<br>0.05                     | 1.5<br>0.05                      | 1.5<br>0.053                     | 1.45<br>0.051                   | 1.5<br>0.053                    | 1.45<br>0.051                    | 1.6<br>0.056                     | 1.5<br>0.053                    | 1.6<br>0.056                    | 1.5<br>0.053                     | 2.4<br>0.085                              | 2.9<br>0.102                        | 8.6<br>0.3  | 8.6<br>0.3  | 8.6<br>0.3  | 8.6<br>0.3  | 8.6<br>0.3                           | 8.6<br>0.3                           | 8.6<br>0.3                           | 8.6<br>0.3                              | 4<br>0.141                           | 13.3<br>0.47                         | 35<br>1.23                         | 29<br>1.0                          |
| <b>Voltage Sensitivity (at 159.2 Hz and 4 mA supply current)</b>                          | mV/ms <sup>-2</sup><br>mV/g                     | 1.02<br>10                         | 1.02<br>10                      | 1.02<br>10                      | 0.51<br>5                        | 1.02<br>10                       | 1.02<br>10                      | 10.2<br>100                     | 10.2<br>100                      | 1.02<br>10                       | 1.02<br>10                      | 10.2<br>100                     | 10.2<br>100                      | 1<br>9.8                                  | 1<br>9.8                            | 1<br>9.8  | 10<br>98  | 50<br>490   | 5<br>49   | 1<br>9.8                             | 10<br>98                             | 50<br>490                            | 5<br>49                                 | 0.98<br>10                           | 1<br>9.8                             | 1<br>9.8                           | 1<br>9.8                           |
| <b>Frequency Range</b>  | Amplitude (±10%)<br>Phase (±5°)                 | 1 to 20000<br>2 to 5000            | 1 to 20000<br>2 to 5000         | 1 to 20000<br>4 to 5000         | 1 to 20000<br>4 to 5000          | 1 to 20000<br>2 to 10000         | 1 to 20000<br>4 to 10000        | 1 to 20000<br>2 to 10000        | 1 to 20000<br>4 to 10000         | 1 to 20000<br>2 to 10000         | 1 to 20000<br>2 to 10000        | 1 to 20000<br>2 to 10000        | 1 to 20000<br>5 to 10000         | 1 to 25000<br>4 to 2500                   | 1 to 25000<br>4 to 2500             | 0.2 to 12800<br>1 to 10000                          | 0.2 to 12800<br>1 to 5000                           | 0.3 to 12800<br>2 to 1500                           | 0.2 to 12800<br>1 to 5000                           | 0.2 to 12800<br>1 to 10000           | 0.2 to 12800<br>1 to 5000            | 0.3 to 12800<br>2 to 1500            | 0.2 to 12800<br>1 to 5000               | 1 to 10000<br>5 to 5000              | 1 to 15000<br>2 to 10000             | 1 to 15000<br>2 to 10000           | 2 to 25000<br>2 to 10000           |
| <b>Mounted Resonance Frequency</b>  | kHz   | 80                                 | 80                              | 40                              | 40                               | 62                               | 62                              | 62                              | 62                               | 62                               | 62                              | 62                              | 62                               | 53  | 52                                  | 38  | 38  | 38  | 38  | 38                                   | 38                                   | 38                                   | 38                                      | 35                                   | 43                                   | 43                                 | 43                                 |
| <b>Max. Transverse Sensitivity (at 30 Hz, 100 ms<sup>-2</sup>)</b>                        | %   | <5                                 | <5                              | <5                              | <5                               | <5                               | <5                              | <5                              | <5                               | <5                               | <5                              | <5                              | <5                               | <4  | <4                                  | <5  | <5  | <5  | <5  | <5                                   | <5                                   | <5                                   | <5                                      | <5                                   | <5                                   | <5                                 | <5                                 |
| <b>Transverse Resonance Frequency</b>   | kHz   |                                    |                                 |                                 |                                  |                                  |                                 |                                 |                                  |                                  |                                 |                                 |                                  | 17  | 15                                  |   |   |   |   |                                      |                                      |                                      |   |                                      |                                      |                                    |                                    |
| <b>Measuring range (± peak)</b>   | kms <sup>-2</sup>                               | 4.9                                | 4.9                             | 4.9                             | 9.8                              | 4.9                              | 4.9                             | 0.49                            | 0.49                             | 4.9                              | 4.9                             | 0.49                            | 0.49                             | 5 (7500 ms <sup>-2</sup> when T < 100 °C) |                                     | 7   | 0.7   | 0.14  | 1.4   | 7                                    | 0.7                                  | 0.14                                 | 1.4                                     | 4.9                                  | 5                                    | 5                                  | 5                                  |
| <b>TEDS</b>   | g   | 500                                | 500                             | 500                             | 1000                             | 500                              | 500                             | 50                              | 50                               | 500                              | 500                             | 50                              | 50                               | 500 (750 g when T < 100 °C)               |                                     | 714   | 71  | 14  | 143   | 714                                  | 71                                   | 14                                   | 14.3                                    | 500                                  | 500                                  | 500                                | 500                                |
|   |   | No                                 | No                              | No                              | No                               | No                               | No                              | No                              | No                               | No                               | No                              | No                              | No                               | No  | No                                  | Yes   | Yes   | Yes   | Yes   | Yes                                  | Yes                                  | Yes                                  | Yes                                     | No                                   | No                                   | No                                 | No                                 |
| <b>ELECTRICAL</b>   |   |                                    |                                 |                                 |                                  |                                  |                                 |                                 |                                  |                                  |                                 |                                 |                                  |   |                                     |   |   |   |   |                                      |                                      |                                      |   |                                      |                                      |                                    |                                    |
| <b>Bias Voltage</b>   | at 25 °C and 4 mA at full temp. and curr. range | V                                  | 10 ± 1.5<br>8 to 16             | 10 ± 1.5<br>8 to 16             | 10 ± 1.5<br>8 to 16              | 10 ± 1.5<br>8 to 16              | 12 ± 1<br>8 to 16               | 12 ± 1<br>8 to 16               | 12 ± 1<br>8 to 16                | 12 ± 1<br>8 to 16                | 12 ± 1<br>8 to 16               | 12 ± 1<br>8 to 16               | 12 ± 1<br>8 to 16                | 12 ± 0.5<br>8 to 15                       | 12 ± 0.5<br>8 to 15                 | 12 to 14<br>12 to 14                                | 12 to 14<br>12 to 14                                | 12 to 14<br>12 to 14                                | 12 to 14<br>12 to 14                                | 12 to 14<br>12 to 14                 | 12 to 14<br>12 to 14                 | 12 to 14<br>12 to 14                 | 12 to 14<br>12 to 14                    | 8.5 to 11.5<br>8 to 16               | 12 ± 1<br>12 ± 2                     | 11 ± 0.5<br>8.5 to 14              | 12 ± 1<br>12 ± 2                   |
| <b>Power Supply</b>   | Constant current<br>Unloaded supply voltage     | mA<br>V                            | 2 to 10<br>24 to 30             | 2 to 10<br>24 to 30             | 2 to 10<br>24 to 30              | 2 to 10<br>24 to 30              | 2 to 10<br>24 to 30             | 2 to 10<br>24 to 30             | 2 to 10<br>24 to 30              | 2 to 10<br>24 to 30              | 2 to 10<br>24 to 30             | 2 to 10<br>24 to 30             | 2 to 10<br>24 to 30              | 2 to 10<br>24 to 30                       | 2 to 10<br>24 to 30                 | 2 to 20<br>21 to 32                                 | 2 to 20<br>21 to 32                                 | 2 to 20<br>21 to 32                                 | 2 to 20<br>21 to 32                                 | 2 to 20<br>21 to 32                  | 2 to 20<br>21 to 32                  | 2 to 20<br>21 to 32                  | 2 to 20<br>21 to 32                     | 2 to 20<br>24 to 30                  | 2 to 20<br>18 to 30                  | 2 to 20<br>18 to 30                | 2 to 20<br>23 to 32                |
| <b>Output Impedance</b>   |   | Ω                                  | 70                              | 70                              | 80                               | 100                              | 40                              | 40                              | 120                              | 120                              | 40                              | 40                              | 120                              | 120                                       | 100                                 | <15   | <15   | <15   | <15   | <15                                  | <15                                  | <15                                  | <15                                     | 60                                   | 2                                    | 100                                | 100                                |
| <b>Start-up time (to final bias ± 10%)</b>  |   | s                                  | <0.7                            | <0.7                            | <1                               | <1                               | <0.3                            | <0.3                            | <4                               | <4                               | <0.3                            | <0.3                            | <1                               | <1  | <5                                  | <30   | <30   | <30   | <30   | <30                                  | <30                                  | <30                                  | <1                                      | <5                                   | <2                                   | <2                                 |                                    |
| <b>Residual Noise (inherent RMS broadband noise in the specified frequency range)</b>     | μV<br>μg  | 60<br>6000                         | 60<br>6000                      | 60<br>6000                      | 30<br>6000                       | 20<br>2000                       | 20<br>2000                      | 90<br>900                       | 90<br>900                        | 20<br>2000                       | 20<br>2000                      | 90<br>900                       | 90<br>900                        | <15<br>2500                               | 25<br>2500                          | 5<br>500  | 13<br>130   | 50<br>100   | 7<br>140  | 5<br>500                             | 13<br>130                            | 50<br>100                            | 7<br>140                                | 60<br>6000                           | 20<br>2000                           | <10<br><1000                       | <10<br><1000                       |
| <b>Noise (spectral)</b>   | 10 Hz<br>100 Hz<br>1000 Hz                      | mms <sup>-2</sup> /√Hz<br>(μg/√Hz) | 7 (700)<br>0.7 (70)<br>0.07 (7) | 7 (700)<br>0.7 (70)<br>0.07 (7) | 7 (700)<br>1.5 (150)<br>0.5 (50) | 7 (700)<br>1.5 (150)<br>0.5 (50) | 1 (100)<br>0.3 (30)<br>0.1 (10) | 1 (100)<br>0.3 (30)<br>0.1 (10) | 0.4 (40)<br>0.1 (10)<br>0.5 (50) | 0.4 (40)<br>0.1 (10)<br>0.5 (50) | 1 (100)<br>0.3 (30)<br>0.1 (10) | 1 (100)<br>0.3 (30)<br>0.1 (10) | 0.4 (40)<br>0.1 (10)<br>0.05 (5) | 0.4 (40)<br>0.1 (10)<br>0.05 (5)          | 0.79 (79)<br>0.21 (21)<br>0.14 (14) | 1.3 (130)<br>0.45 (45)<br>0.17 (17)                 | 0.25 (25)<br>0.07 (7)<br>0.044 (4.4)                | 0.15 (15)<br>0.025 (2.5)<br>0.009 (0.9)             | 0.11 (11)<br>0.022 (2.2)<br>0.009 (0.9)             | 0.14 (14)<br>0.03 (3)<br>0.014 (1.4) | 0.25 (25)<br>0.07 (7)<br>0.044 (4.4) | 0.15 (15)<br>0.025 (2.5)<br>0.01 (1) | 0.11 (11)<br>0.022 (2.2)<br>0.009 (0.9) | 0.14 (14)<br>0.03 (3)<br>0.014 (1.4) | 0.9 (90)<br>0.15 (15)<br>0.029 (2.9) | 1.6 (160)<br>0.5 (50)<br>0.16 (16) | 1.6 (160)<br>0.5 (50)<br>0.16 (16) |
| <b>Insulation Resistance (body to mounting surface)</b>                                   | MΩ  | Case grounded                      | Base isolated                   | Case grounded                   | Case grounded                    | Case grounded                    | Case grounded                   | Case grounded                   | Case grounded                    | Case grounded                    | Case grounded                   | Case grounded                   | Case grounded                    | Base isolated                             | Base isolated                       | Base isolated                                       | Base isolated                                       | Base isolated                                       | Base isolated                                       | Base isolated                        | Base isolated                        | Base isolated                        | Base isolated                           | >100                                 | >100                                 | >100                               |                                    |
| <b>ENVIRONMENTAL</b>  |   |                                    |                                 |                                 |                                  |                                  |                                 |                                 |                                  |                                  |                                 |                                 |                                  |   |                                     |   |   |   |   |                                      |                                      |                                      |   |                                      |                                      |                                    |                                    |
| <b>Operating Temperature Range</b>  | °C<br>°F  | -51 to +121<br>-60 to +250         | -51 to +121<br>-60 to +250      | -51 to +121<br>-60 to +250      | -51 to +121<br>-60 to +250       | -51 to +121<br>-60 to +250       | -51 to +121<br>-60 to +250      | -51 to +100<br>-60 to 212       | -51 to +100<br>-60 to 212        | -51 to +121<br>-60 to +250       | -51 to +121<br>-60 to +250      | -51 to +100<br>-60 to 212       | -51 to +100<br>-60 to 212        | -50 to +125<br>-58 to +257                | -50 to +125<br>-58 to +257          | -55 to +125<br>-67 to +257                          | -55 to +125<br>-67 to +257                          | -55 to +125<br>-67 to +257                          | -55 to +125<br>-67 to +257                          | -55 to +125<br>-67 to +257           | -55 to +125<br>-67 to +257           | -55 to +125<br>-67 to +257           | -51 to +121<br>-60 to +250              | -54 to +150<br>-65 to +302           | -54 to +150<br>-65 to +302           | -54 to +150<br>-65 to +302         |                                    |
| <b>Temperature Coefficient of Sensitivity</b>   | %/°C  | 0.05                               | 0.05                            | 0.11                            | 0.11                             | 0.2                              | 0.07                            | 0.07                            | 0.23                             | 0.23                             | 0.23                            | 0.23                            | 0.23                             | 0.05                                      | 0.04                                | 0.11  | 0.11  | 0.11  | 0.11  | 0.11                                 | 0.11                                 | 0.11                                 | 0.11                                    | 0.09                                 | 0.09                                 | 0.09                               |                                    |
| <b>Temperature Transient Sensitivity (3 Hz Lower Limiting Freq. (-3 dB, 6 dB/octave))</b> | ms <sup>-2</sup> /°C<br>g/°F                    | 0.3<br>0.0165                      | 0.3<br>0.0165                   | 0.1<br>0.0055                   | 0.1<br>0.0055                    | 0.3<br>0.0165                    | 0.3<br>0.0165                   | 0.3<br>0.0165                   | 0.3<br>0.0165                    | 0.3<br>0.0165                    | 0.3<br>0.0165                   | 0.3<br>0.0165                   | 0.3<br>0.0165                    | 2<br>0.11                                 | 2<br>0.11                           | 0.02<br>0.0011                                      | 0.02<br>0.0011                                      | 0.02<br>0.0011                                      | 0.02<br>0.0011                                      | 0.02<br>0.0011                       | 0.02<br>0.0011                       | 0.02<br>0.0011                       | 0.21<br>0.01155                         | 0.2<br>0.011                         | 1<br>0.055                           | 1<br>0.055                         |                                    |
| <b>Magnetic Sensitivity (50 Hz, 0.038 T)</b>  | ms <sup>-2</sup> /T<br>g/kg                     | 40<br>0.4                          | 40<br>0.4                       | 20<br>0.2                       | 1<br>0.1                         | 5<br>0.05                        | 5<br>0.05                       | 9<br>0.09                       | 9<br>0.09                        | 5<br>0.05                        | 5<br>0.05                       | 12<br>0.12                      | 12<br>0.12                       | 50<br>0.5                                 | 10<br>0.1                           | 3<br>0.03   | 3<br>0.03   | 3<br>0.03   | 3<br>0.03   | 3<br>0.03                            | 3<br>0.03                            | 3<br>0.03                            | 6<br>0.06                               | 24<br>0.24                           | 20<br>0.2                            | 20<br>0.2                          |                                    |
| <b>Base Strain Sensitivity (at 250 με in base plane)</b>                                  | ms <sup>-2</sup> /με<br>g/με                    | 0.8<br>0.08                        | 0.5<br>0.05                     | 0.1<br>0.01                     | 0.1<br>0.01                      | 0.1<br>0.01                      | 0.1<br>0.01                     | 0.1<br>0.01                     | 0.1<br>0.01                      | 0.1<br>0.01                      | 0.1<br>0.01                     | 0.1<br>0.01                     | 0.1<br>0.01                      | 0.005<br>0.0005                           | 0.005<br>0.0005                     | 0.03<br>0.003                                       | 0.03<br>0.003                                       | 0.03<br>0.003                                       | 0.03<br>0.003                                       | 0.03<br>0.003                        | 0.03<br>0.003                        | 0.03<br>0.003                        | 0.06<br>0.006                           | 0.2<br>0.02                          | 0.05<br>0.005                        | 0.05<br>0.005                      |                                    |
| <b>Max. Non-destructive Shock (± peak)</b>  | kms <sup>-2</sup><br>g                          | 49<br>5000                         | 49<br>5000                      | 15<br>1500                      | 15<br>1500                       | 29<br>3000                       | 29<br>3000                      | 29<br>3000                      | 29<br>3000                       | 29<br>3000                       | 29<br>3000                      | 29<br>3000                      | 29<br>3000                       | 100 (axial) 50 (transverse)               | 100 (axial) 50 (transverse)         | 100<br>10000  | 100<br>10000  | 100<br>10000  | 100<br>10000  | 100<br>10000                         | 100<br>10000                         | 100<br>10000                         | 20<br>2000                              | 51<br>5000                           | 51<br>5000                           | 51<br>5000                         |                                    |
| <b>MECHANICAL</b>   |   |                                    |                                 |                                 |                                  |                                  |                                 |                                 |                                  |                                  |                                 |                                 |                                  |   |                                     |   |   |   |   |                                      |                                      |                                      |   |                                      |                                      |                                    |                                    |
| <b>Case Material</b>  |   | Titanium                           | Titanium                        | Titanium                        | Titanium                         | Titanium                         | Titanium                        | Titanium                        | Titanium                         | Titanium                         | Titanium                        | Titanium                        | Titanium                         | Titanium ASTM Grade 2                     | Titanium ASTM Grade 2               | Titanium  | Titanium  | Titanium  | Titanium  | Titanium                             | Titanium                             | Titanium                             | Titanium                                | Stainless steel AISI 316-L           | Stainless steel AISI 316-L           | Stainless steel AISI 316-L         |                                    |
| <b>Piezoelectric Sensing Element</b>  |   | Quartz                             | Quartz                          | Quartz                          | Quartz                           | Ceramic                          | Ceramic                         | Ceramic                         | Ceramic                          | Ceramic                          | Ceramic                         | Ceramic                         | Ceramic                          | PZ 23                                     | PZ 23                               | PZ 23   | PZ 23   | PZ 23   | PZ 23   | PZ 23                                | PZ 23                                | PZ 23                                | Quartz                                  | PZ 23                                | PZ 23                                | PZ 23                              |                                    |
| <b>Construction</b>   |   | Planar Shear                       | Planar Shear                    | Planar Shear                    | Planar Shear                     | Planar Shear                     | Planar Shear                    | Planar Shear                    | Planar Shear                     | Planar Shear                     | Planar Shear                    | Planar Shear                    | Planar Shear                     | DeltaShear™                               | DeltaShear™                         | Shear   | Shear   | Shear   | Shear   | Shear                                | Shear                                | Shear                                | Planar Shear                            | Annular Shear, base insulated        | Annular Shear, case insulated        | Annular Shear, case insulated      |                                    |
| <b>Sealing</b>  |   | Hermetic                           | Hermetic                        | Hermetic                        | Hermetic                         | Hermetic                         | Hermetic                        | Hermetic                        | Hermetic                         | Hermetic                         | Hermetic                        | Hermetic                        | Hermetic                         | Welded                                    | Welded                              | Hermetic  | Hermetic  | Hermetic  | Hermetic  | Hermetic                             | Hermetic                             | Hermetic                             | Hermetic                                | Hermetic                             | Hermetic                             | Hermetic                           |                                    |
| <b>Electrical Connector</b>   |   | Coaxial 3-56                       | Coaxial 3-56                    | 10-32 UNF-2A                    | 10-32 UNF-2A                     | Coaxial M3                       | Coaxial M3                      | Coaxial M3                      | Coaxial M3                       | Coaxial M3                       | Coaxial M3                      | Coaxial M3                      | Coaxial M3                       | Coaxial M3                                | Coaxial M3                          | 10-32 UNF   | 10-32 UNF   | 10-32 UNF   | 10-32 UNF   | 10-32 UNF                            | 10-32 UNF                            | 10-32 UNF                            | M3                                      | 10-32 UNF-2A                         | 3-pin HiRel                          | 3-pin Glenair® 800-series          |                                    |
| <b>Mounting</b>   |   | Adhesive                           | Adhesive                        | Adhesive                        | Adhesive                         | Integral M3 stud × 3.8 mm        | Adhesive                        | Integral M3 stud × 3.8 mm       | Adhesive                         | Integral M3 stud × 2.8 mm        | Adhesive                        | Integral M3 stud × 3.8 mm       | Adhesive                         | M3 × 2.4 mm threaded hole                 | M3 × 2 mm threaded hole             | Stud mount, 10-32 UNF internal thread, depth 3.8 mm | Stud mount, 10-32 UNF internal thread, depth 3.8 mm | Stud mount, 10-32 UNF internal thread, depth 3.8 mm | Stud mount, 10-32 UNF internal thread, depth 3.8 mm | 10-32 UNF × 3.8 mm threaded hole     | 10-32 UNF × 3.8 mm threaded hole     | 10-32 UNF × 3.8 mm threaded hole     | 10-32 UNF × 3.8 mm threaded hole        | Insulated M2 centre bolt             | M4 centre bolt                       | M4 centre bolt or 10-32 UNF stud   | M4 centre bolt                     |

\* Same as Type 4397-5 with insulated base

## High-temperature, High-sensitivity, Underwater and Shock Uniaxial CCLD Accelerometers

| Type No.  |  | High Temperature                   |                                      |                                      | High Sensitivity                         |   |   | Underwater  | Shock                               |                                       |
|---|--|------------------------------------|--------------------------------------|--------------------------------------|--|---|---|---|-------------------------------------|---------------------------------------|
|   |  | 4526                               | 4526-001                             | 4526-002                             | 8340                                     | 8344  | 8344-B-001  | 5958-A*   | 8339                                | 8339-001                              |
| <b>GENERAL</b>  |  |                                    |                                      |                                      |  |   |   |   |                                     |                                       |
| <b>Weight (excluding cable, wherever applicable)</b>                                      | gram<br>oz   | 5<br>0.18                          | 5<br>0.18                            | 5<br>0.18                            | 775<br>27.33                             | 176<br>6.2                                  | 176<br>6.2  | 44 <sup>†</sup><br>1.55 <sup>†</sup>  | 5.8<br>0.204                        | 5.8<br>0.204                          |
| <b>Voltage Sensitivity (at 159.2 Hz and 4 mA supply current)</b>                          | mV/ms <sup>-2</sup><br>mV/g                        | 10<br>98                           | 1<br>9.8                             | 10<br>98                             | 1020<br>10000                            | 250<br>2450                                 | 50<br>490   | 1<br>9.8  | 0.025<br>0.25                       | 0.01<br>0.1                           |
| <b>Frequency Range</b>  | Amplitude (±10%)<br>Phase (±5°)<br>Hz              | 0.3 to 8000<br>2 to 5000           | 0.1 to 8000<br>0.5 to 5000           | 0.3 to 8000<br>2 to 5000             | 0.1 to 1500<br>5 to 200                  | 0.2 to 3000<br>0.5 to 5000                  | 0.05 to 3000<br>0.5 to 5000   | 0.3 to 11000<br>5 to 10000  | 1 to 20000<br>5 to 8000             | 1 to 20000<br>5 to 8000               |
| <b>Mounted Resonance Frequency</b>  | kHz  | 25                                 | 25                                   | 25                                   | 7  | 10  | 10  | 45  | 130                                 | 130                                   |
| <b>Max. Transverse Sensitivity (at 30 Hz, 100 ms<sup>-2</sup>)</b>                        | %  | <5                                 | <5                                   | <5                                   | <1                                       | <5  | <5  | <5  | <10                                 | <10                                   |
| <b>Transverse Resonance Frequency</b>   | kHz  | >18                                | >18                                  | >18                                  |  | 3.5   | 3.5   | 14  |                                     |                                       |
| <b>Measuring range (± peak)</b>   | kms <sup>-2</sup><br>g                             | 0.7<br>70                          | 7<br>714                             | 0.7<br>70                            | 0.0049<br>0.5                            | 0.026<br>2.6                                | 0.137<br>14   | 5<br>500  | 200<br>20000                        | 500<br>50000                          |
| <b>TEDS</b>   |  | No                                 | No                                   | No                                   | No                                       | Yes   | Yes   | No  | No                                  | No                                    |
| <b>ELECTRICAL</b>   |  |                                    |                                      |                                      |  |   |   |   |                                     |                                       |
| <b>Bias Voltage</b>   | at 25 °C and 4 mA<br>at full temp. and curr. range | V                                  | 12 ± 1<br>9 to 13                    | 12 ± 1<br>9 to 13                    | 12 ± 1<br>10 to 14                       | 13 ± 1<br>13 ± 1                            | 13 ± 1<br>13 ± 1  | 12 ± 0.5<br>10 to 15  | 9 ± 1<br>7.5 to 10                  | 9 ± 1<br>7.5 to 10                    |
| <b>Power Supply</b>   | Constant current<br>Unloaded supply voltage        | mA<br>V                            | 2 to 20<br>24 to 30                  | 2 to 10<br>24 to 30                  | 2 to 10<br>24 to 30                      | 2 to 20<br>24 to 30                         | 2 to 20<br>24 to 30   | 2 to 20<br>24 to 30   | 2 to 20<br>24 to 30                 | 2 to 20<br>24 to 30                   |
| <b>Output Impedance</b>   |  | Ω                                  | 2                                    | 2                                    | 2  | 200   | 30  | 30  | 100                                 | 100                                   |
| <b>Start-up time (to final bias ±10%)</b>   |  | s                                  | <5                                   | <5                                   | <5                                       | <8  | <30   | 120   | <0.1                                | <0.1                                  |
| <b>Residual Noise (inherent RMS broadband noise in the specified frequency range)</b>     | μV<br>μg   | <35<br><350                        | <8<br><816                           | <35<br><350                          | 25<br>2.5                                | 113: 0.2 to 3000 Hz<br>45: 0.2 to 3000 Hz   | 9: 0.3 to 3000 Hz<br>5: 1 to 3000 Hz<br>18: 0.3 to 3000 Hz<br>10: 1 to 3000 Hz                | <15<br><1500  | 35<br>150000                        | 35<br>350000                          |
| <b>Noise (spectral)</b>   | 10 Hz<br>100 Hz<br>1000 Hz                         | mms <sup>-2</sup> /√Hz<br>(μg/√Hz) | 0.15 (15)<br>0.035 (3.5)<br>0.02 (2) | 0.25 (25)<br>0.06 (6)<br>0.035 (3.5) | 0.15 (15)<br>0.035 (3.5)<br>0.02 (2)     | 0.015 (1.5)<br>0.015 (1.5)<br>0.0005 (0.05) | 0.00775 (0.78) <sup>‡</sup><br>0.000775 (0.078) <sup>‡</sup><br>0.000846 (0.035) <sup>‡</sup> | 0.011 (1.1) <sup>**</sup><br>0.002 (0.2) <sup>**</sup><br>0.0009 (0.09) <sup>**</sup> | 60 (6000)<br>15 (1500)<br>10 (1000) | 150 (15000)<br>35 (3500)<br>25 (2500) |
| <b>Insulation Resistance (body to mounting surface)</b>                                   | MΩ   |                                    |                                      |                                      | Case isolated                            |   |   | >10   | Base isolated                       | Base isolated                         |
| <b>ENVIRONMENTAL</b>  |  |                                    |                                      |                                      |  |   |   |   |                                     |                                       |
| <b>Operating Temperature Range</b>  | °C<br>°F   | -54 to +180<br>-65 to +356         | -54 to +180<br>-65 to +356           | -54 to +165<br>-65 to +329           | -51 to +74<br>-60 to +165                | -50 to +100<br>-58 to +212                  | -50 to +100<br>-58 to +212  | -50 to +100<br>-58 to +212  | -51 to +121<br>-60 to +250          | -51 to +121<br>-60 to +250            |
| <b>Temperature Coefficient of Sensitivity</b>   | %/°C   | 0.09                               | 0.09                                 | 0.09                                 | 0.25                                     | 0.05  | 0.05  | 0.05  | 0.03                                | 0.03                                  |
| <b>Temperature Transient Sensitivity (3 Hz Lower Limiting Freq. (-3 dB, 6 dB/octave))</b> | ms <sup>-2</sup> /°C<br>g/°F                       | 0.3<br>0.0165                      | 0.3<br>0.0165                        | 0.3<br>0.0165                        | 0.003<br>0.000165                        | 0.001<br>0.000055                           | 0.001<br>0.000055   | 1<br>0.055  | 30<br>1.65                          | 30<br>1.65                            |
| <b>Magnetic Sensitivity (50 Hz, 0.038 T)</b>  | ms <sup>-2</sup> /T<br>g/kG                        | 3<br>0.03                          | 3<br>0.03                            | 3<br>0.03                            | 0.7<br>0.007                             | 0.5<br>0.005                                | 2.5<br>0.025  | 20<br>0.2   | 2000<br>20                          | 2000<br>20                            |
| <b>Base Strain Sensitivity (at 250 με in base plane)</b>                                  | ms <sup>-2</sup> /με<br>g/με                       | 0.001<br>0.0001                    | 0.001<br>0.0001                      | 0.005<br>0.0005                      | 0.0002<br>0.00002                        | 0.002<br>0.0002                             | 0.002<br>0.0002   | 0.01<br>0.001   | 1.3<br>0.13                         | 1.3<br>0.13                           |
| <b>Max. Non-destructive Shock (± peak)</b>  | kms <sup>-2</sup><br>g                             | 50<br>5000                         | 50<br>5000                           | 50<br>5000                           | 0.98<br>100                              | 3.6<br>350                                  | 3.6<br>350  | 20<br>2000  | 816<br>80000                        | 816<br>80000                          |
| <b>MECHANICAL</b>   |  |                                    |                                      |                                      |  |   |   |   |                                     |                                       |
| <b>Case Material</b>  |  | Titanium ASTM Grade 2              | Titanium ASTM Grade 2                | Titanium ASTM Grade 2                | Stainless steel                          | Stainless steel AISI 316-L                  | Stainless steel AISI 316-L  | Stainless steel AISI 404L   | 17-4 PH Stainless steel             | 17-4 PH Stainless steel               |
| <b>Piezoelectric Sensing Element</b>  |  | PZ 23                              | PZ 23                                | PZ 23                                | Ceramic                                  | PZ 27                                       | PZ 27   | PZ 23   | Quartz                              | Quartz                                |
| <b>Construction</b>   |  | ThetaShear™                        | ThetaShear™                          | ThetaShear™                          | Annular Shear                            | DeltaShear™                                 | DeltaShear™   | DeltaShear™   | Compression                         | Compression                           |
| <b>Sealing</b>  |  | Hermetic                           | Hermetic                             | Hermetic                             | Hermetic                                 | Hermetic                                    | Hermetic  | Hermetic  | Hermetic                            | Hermetic                              |
| <b>Electrical Connector</b>   |  | 10-32 UNF-2A                       | 10-32 UNF-2A                         | 10-32 UNF-2A                         | 2-pin MIL-C-5015                         | 10-32 UNF                                   | 10-32 UNF   | BNC   | 10-32 UNF-2A                        | 10-32 UNF-2A                          |
| <b>Mounting</b>   |  | Stud mount, 10-32 threaded hole    | Stud mount, 10-32 threaded hole      | Adhesive                             | Stud mount, 1/4"-28 UNF-2A threaded hole | M5 × 4.5 threaded hole                      | M5 × 4.5 threaded hole  | 1/4"-28 UNF-2A integrated   | Integral 10-32 UNF stud             | Integral 10-32 UNF stud               |

\* Also available as Type 5958-H with open end

† In air, including 0.15 m cable

‡ Type 8344 noise spectral at 1 Hz = 0.11 ms<sup>-2</sup>/√Hz (11 μg/√Hz)

\*\* Type 8344-B-001 noise spectral at 1 Hz = 0.09 ms<sup>-2</sup>/√Hz (9 μg/√Hz)

## Industrial Piezoelectric CCLD Accelerometers

| Type No.  |  | Industrial Applications                |   |
|---|--|--|---|
|   |  | 8341                                   | 8324-G*   |
| <b>GENERAL</b>  |  |  |   |
| <b>Weight (excluding cable, wherever applicable)</b>                                  | gram<br>oz   | 41<br>1.44                             | 91<br>3.15  |
| <b>Voltage Sensitivity (at 159.2 Hz and 4 mA supply current)</b>                      | mV/ms <sup>-2</sup><br>mV/g                                | 10<br>100                              | 1<br>9.8  |
| <b>Frequency Range: Amplitude (±10% limit)</b>  | Hz   | 0.3 to 10000                           | 9000  |
| <b>Mounted Resonance Frequency</b>  | kHz  | 27                                     | 30  |
| <b>Max. Transverse Sensitivity (at 30 Hz, 100 ms<sup>-2</sup>)</b>                    | %  | <5                                     | <3  |
| <b>Transverse Resonance Frequency</b>   | kHz  |  | 9   |
| <b>Measuring range (± peak)</b>   | kms <sup>-2</sup><br>g                                     | 490<br>50                              | 20<br>2000  |
| <b>ELECTRICAL</b>   |  |  |   |
| <b>Bias Voltage</b>   | at 25 °C and 4 mA<br>at full temperature and current range | V                                      | -<br>-  |
| <b>Power Supply</b>   | Constant current<br>Unloaded supply voltage                | mA<br>V                                | 2 to 10<br>24 to 30   |
| <b>Output Impedance</b>   |  | Ω                                      | 60  |
| <b>Start-up time (to final bias ±10%)</b>   |  | s                                      | <3  |
| <b>Residual Noise (inherent RMS broadband noise in the specified frequency range)</b> | μV<br>μg   | 20<br>200                              | 4<br>0.4  |
| <b>Isolation</b>  |  | Case insulated                         | Case insulated  |
| <b>ENVIRONMENTAL</b>  |  |  |   |
| <b>Operating Temperature Range</b>  | °C<br>°F   | -51 to +121<br>-60 to +250             | Accelerometer: -60 to +480<br>Charge Converter: -40 to +85<br>Accelerometer: -76 to +896<br>Charge Converter: -40 to +185 |
| <b>Temperature Coefficient of Sensitivity</b>   | %/°C   | 0.11                                   | 0.11  |
| <b>Temperature Transient Sensitivity (3 Hz Lower Limiting Freq. 20 dB/decade)</b>     | ms <sup>-2</sup> /°C<br>g/°F                               | 0.2<br>0.011                           | 20<br>1.1   |
| <b>Magnetic Sensitivity (50 Hz, 0.038 T)</b>  | ms <sup>-2</sup> /T<br>g/kG                                | 25<br>0.25                             | 25<br>0.25  |
| <b>Base Strain Sensitivity (in the base plane at 250 με)</b>                          | ms <sup>-2</sup> /με<br>g/με                               | 0.1<br>0.01                            | 0.2<br>0.02   |
| <b>Max. Non-destructive Shock (± peak)</b>  | kms <sup>-2</sup><br>g                                     | 50<br>5000                             | 20<br>2000  |
| <b>MECHANICAL</b>   |  |  |   |
| <b>Case Material</b>  |  | Stainless Steel                        | Inconel® 600  |
| <b>Piezoelectric Sensing Element</b>  |  | Ceramic                                | Piezoelectric type PT   |
| <b>Construction</b>   |  | Planar Shear                           | Compression   |
| <b>Sealing</b>  |  | Hermetic                               | Hermetic  |
| <b>Electrical Connector</b>   |  | MIL-C-5015                             | BNC (connector at the cable end)  |
| <b>Mounting</b>   |  | 1/4"-28 UNF<br>× 6.35 mm threaded hole | ARINC, 8-32 UNC<br>3 × M4   |

\* The accelerometer comes with high temperature cable, integrated charge converter/filter and TEDS.

# Triaxial Piezoelectric CCLD Accelerometers

| Type No.  | High Temperature                                   |   |                                    |   |                                    |   | General Purpose                    |   |                                    |   |                                    |   |                                    |  |                                     |   |   |   |   |   |   |  |
|---|--|---|------------------------------------|---|------------------------------------|---|------------------------------------|---|------------------------------------|---|------------------------------------|---|------------------------------------|--|-------------------------------------|---|---|---|---|---|---|--|
|   | 4528-B   |   | 4528-B-001                         |   | 4527                               |   | 4527-001                           |   | 4535-B                             |   | 4535-B-001                         |   | 4504-A                             |  | 4506*                               |   | 4506-B*                                   |   | 4506-B-003*                               |   |   |  |
| <b>GENERAL</b>  |  |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |  |                                     |   |   |   |   |   |   |  |
| <b>Weight (excluding cable, wherever applicable)</b>                                      | gram<br>oz   | 6<br>0.21   |                                    | 6<br>0.21   |                                    | 6<br>0.21   |                                    | 6<br>0.21   |                                    | 6<br>0.21   |                                    | 6<br>0.21   |                                    | 15<br>0.54                                     |                                     | 15<br>0.54  |   | 15<br>0.54  |   | 18<br>0.63  |   |  |
| <b>Voltage Sensitivity (at 159.2 Hz and 4 mA supply current)</b>                          | mV/ms <sup>-2</sup><br>mV/g                        | 1<br>9.8  |                                    | 10<br>98  |                                    | 1<br>9.8  |                                    | 10<br>98  |                                    | 1<br>9.8  |                                    | 10<br>98  |                                    | 1<br>9.8                                       |                                     | 10<br>98  |   | 10<br>98  |   | 50<br>490   |   |  |
| <b>Frequency Range</b>  | Amplitude (±10%)<br>Phase (±5°)                    | X: 0.3 to 10000<br>Y: 0.3 to 10000<br>Z: 0.3 to 12800 |                                    | X: 0.3 to 10000<br>Y: 0.3 to 10000<br>Z: 0.3 to 12800 |                                    | X: 0.3 to 10000<br>Y: 0.3 to 10000<br>Z: 0.3 to 12800 |                                    | X: 0.3 to 10000<br>Y: 0.3 to 10000<br>Z: 0.3 to 12800 |                                    | X: 0.3 to 10000<br>Y: 0.3 to 10000<br>Z: 0.3 to 12800 |                                    | X: 0.3 to 10000<br>Y: 0.3 to 10000<br>Z: 0.3 to 12800 |                                    | X: 1 to 11000<br>Y: 1 to 9000<br>Z: 1 to 18000 |                                     | X: 0.3 to 5500<br>Y: 0.6 to 3000<br>Z: 0.6 to 3000  |   | X: 0.3 to 5500<br>Y: 0.6 to 3000<br>Z: 0.6 to 3000  |   | X: 0.3 to 4000<br>Y: 0.3 to 2000<br>Z: 0.3 to 2000  |   |  |
| <b>Mounted Resonance Frequency</b>  |  | X: 30<br>Y: 30<br>Z: 42                               |                                    | X: 30<br>Y: 30<br>Z: 42                               |                                    | X: 30<br>Y: 30<br>Z: 42                               |                                    | X: 30<br>Y: 30<br>Z: 42                               |                                    | X: 30<br>Y: 30<br>Z: 42                               |                                    | X: 30<br>Y: 30<br>Z: 42                               |                                    | X: 26<br>Y: 23<br>Z: 44                        |                                     | X: 18<br>Y: 9.5<br>Z: 9.5                           |   | X: 18<br>Y: 9.5<br>Z: 9.5                           |   | X: 14<br>Y: 7<br>Z: 7                               |   |  |
| <b>Max. Transverse Sensitivity (at 30 Hz, 100 ms<sup>-2</sup>)</b>                        | %  | <5  |                                    | <5  |                                    | <5  |                                    | <5  |                                    | <5  |                                    | <5  |                                    | <5   |                                     | <5  |   | <5  |   | <5  |   |  |
| <b>Transverse Resonance Frequency</b>   | kHz  |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |  |                                     |   |   |   |   |   |   |  |
| <b>Measuring range (± peak)</b>   | kms <sup>-2</sup><br>g                             | 7000<br>714   |                                    | 700<br>71   |                                    | 7000<br>714   |                                    | 700<br>71   |                                    | 7000<br>714   |                                    | 700<br>71   |                                    | 5000<br>500                                    |                                     | 700<br>70   |   | 700<br>70   |   | 140<br>14   |   |  |
| <b>TEDS</b>   |  | Yes   |                                    | Yes   |                                    | No  |                                    | No  |                                    | Yes   |                                    | Yes   |                                    | No   |                                     | No  |   | Yes   |   | Yes   |   |  |
| <b>ELECTRICAL</b>   |  |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |  |                                     |   |   |   |   |   |   |  |
| <b>Bias Voltage</b>   | at 25 °C and 4 mA<br>at full temp. and curr. range | V   | 13 ±1<br>11 to 14                  |   | 13 ±1<br>11 to 14                  |   | 12 ±1<br>8.5 to 14                 |   | 12 ±1<br>8.5 to 14                 |   | 13 ±1<br>12 to 14                  |   | 13 ±1<br>12 to 14                  |  | 12 ±0.5<br>8 to 15                  |   | 12 ±1                                     |   | 13 ±1                                     |   | 13 ±1                                     |  |
| <b>Power Supply</b>   | Constant current<br>Unloaded supply voltage        | mA<br>V   | 2 to 20<br>20 to 30                |   | 2 to 20<br>20 to 30                |   | 2 to 20<br>20 to 30                |   | 2 to 20<br>20 to 30                |   | 2 to 20<br>22 to 30                |   | 2 to 20<br>22 to 30                |  | +24 to +30                          |   | +24 to +30                                |   | +24 to +30                                |   | +24 to +30                                |  |
| <b>Output Impedance</b>   |  | Ω   | 50                                 |   | 50                                 |   | 30                                 |   | 30                                 |   | 50                                 |   | 50                                 |  | <100                                |   | <2  |   | <30                                       |   | <30                                       |  |
| <b>Start-up time (to final bias ± 10%)</b>  |  | s   | <10                                |   | <10                                |   | <10                                |   | <10                                |   | <10                                |   | <10                                |  | <2                                  |   | <10                                       |   | <10                                       |   | <10                                       |  |
| <b>Residual Noise (inherent RMS broadband noise in the specified frequency range)</b>     | 10 Hz<br>100 Hz<br>1000 Hz                         | μV<br>μg  | 9.0<br>900                         |   | 60<br>600                          |   | 9.0<br>900                         |   | 60<br>600                          |   | 9<br>900                           |   | 60<br>600                          |  | <40<br><40000                       |   | X: <40<br>Y: <200<br>Z: <200              |   | X: <40<br>Y: <200<br>Z: <200              |   | X: <60<br>Y: <60<br>Z: <60                |  |
| <b>Noise (spectral)</b>   |  | mms <sup>-2</sup> /√Hz<br>(μg/√Hz)                    | 0.30 (30)<br>0.06 (6)<br>0.04 (4)  |   | 0.2 (20)<br>0.06 (6)<br>0.02 (2)   |   | 0.30 (30)<br>0.06 (6)<br>0.04 (4)  |   | 0.2 (20)<br>0.06 (6)<br>0.04 (4)   |   | 0.30 (30)<br>0.06 (6)<br>0.04 (4)  |   | 0.2 (20)<br>0.04 (4)<br>0.02 (2)   |  | 2.1 (210)<br>0.75 (75)<br>0.28 (28) |   | X: 0.2 (20)<br>Y: 0.02 (2)<br>Z: 0.01 (1) |   | X: 0.2 (20)<br>Y: 0.02 (2)<br>Z: 0.01 (1) |   | X: 0.1 (10)<br>Y: 0.06 (6)<br>Z: 0.02 (2) |  |
| <b>Insulation Resistance (body to mounting surface)</b>                                   |  | MΩ  |                                    |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |  | >10                                 |   |   |   |   |   |   |  |
| <b>Insulation Resistance (signal ground to case)</b>                                      |  | GΩ  | Signal ground is connected to case |   | Signal ground is connected to case |   | Signal ground is connected to case |   | Signal ground is connected to case |   | Signal ground is connected to case |   | Signal ground is connected to case |  |                                     |   | >1  |   | >1  |   | >1  |  |
| <b>ENVIRONMENTAL</b>  |  |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |  |                                     |   |   |   |   |   |   |  |
| <b>Operating Temperature Range</b>  | °C<br>°F   | -60 to +165<br>-76 to +329                            |                                    | -60 to +165<br>-76 to +329                            |                                    | -60 to +180<br>-76 to +356                            |                                    | -60 to +180<br>-76 to +356                            |                                    | -60 to +125<br>-76 to +257                            |                                    | -60 to +125<br>-76 to +257                            |                                    | -50 to +125<br>-58 to +257                     |                                     | -54 to +100<br>-65 to +212                          |   | -54 to +100<br>-65 to +212                          |   | -54 to +100<br>-65 to +212                          |   |  |
| <b>Temperature Coefficient of Sensitivity</b>   | %/°C   | 0.12  |                                    | 0.1   |                                    | 0.12  |                                    | 0.1   |                                    | 0.12  |                                    | 0.1   |                                    | 0.1  |                                     | X: 0.1<br>Y: 0.1<br>Z: 0.08                         |   | X: 0.05<br>Y: 0.1<br>Z: 0.1                         |   | X: 0.15<br>Y: 0.12<br>Z: 0.12                       |   |  |
| <b>Temperature Transient Sensitivity (3 Hz Lower Limiting Freq. (-3 dB, 6 dB/octave))</b> | ms <sup>-2</sup> /°C<br>g/°F                       | 0.02<br>0.0011  |                                    | 0.02<br>0.0011  |                                    | 0.02<br>0.0011  |                                    | 0.02<br>0.0011  |                                    | 0.02<br>0.0011  |                                    | 0.02<br>0.0011  |                                    | 0.5<br>0.0275                                  |                                     | 3<br>0.165  |   | 3<br>0.165  |   | 5<br>0.275  |   |  |
| <b>Magnetic Sensitivity (50 Hz, 0.038 T)</b>  | ms <sup>-2</sup> /T<br>g/kG                        | 15<br>0.15  |                                    | 8<br>0.08   |                                    | 15<br>0.15  |                                    | 8<br>0.08   |                                    | 15<br>0.15  |                                    | 8<br>0.08   |                                    | 10<br>0.1                                      |                                     | 6<br>0.06   |   | 6<br>0.06   |   | 6<br>0.06   |   |  |
| <b>Base Strain Sensitivity (at 250 με in base plane)</b>                                  | ms <sup>-2</sup> /με<br>g/με                       | 0.1<br>0.01   |                                    | 0.1<br>0.01   |                                    | 0.1<br>0.01   |                                    | 0.1<br>0.01   |                                    | 0.1<br>0.01   |                                    | 0.1<br>0.01   |                                    | 0.001 <sup>†</sup><br>0.0001 <sup>†</sup>      |                                     | 0.03 <sup>‡</sup><br>0.003 <sup>‡</sup>             |   | 0.03 <sup>‡</sup><br>0.003 <sup>‡</sup>             |   | 0.02 <sup>‡</sup><br>0.002 <sup>‡</sup>             |   |  |
| <b>Max. Non-destructive Shock (peak)</b>  | kms <sup>-2</sup><br>g                             | 50<br>5100  |                                    | 50<br>5100  |                                    | 50<br>5100  |                                    | 50<br>5100  |                                    | 50<br>5100  |                                    | 50<br>5100  |                                    | 30<br>3000                                     |                                     | 50<br>5000  |   | 50<br>5000  |   | 20<br>2000  |   |  |
| <b>MECHANICAL</b>   |  |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |   |                                    |  |                                     |   |   |   |   |   |   |  |
| <b>Case Material</b>  |  | Titanium  |                                    | Titanium  |                                    | Titanium  |                                    | Titanium  |                                    | Titanium  |                                    | Titanium  |                                    | Anodized Aluminium                             |                                     | Titanium ASTM Grade 2                               |   | Titanium ASTM Grade 2                               |   | Titanium ASTM Grade 2                               |   |  |
| <b>Piezoelectric Sensing Element</b>  |  | PZ 23   |                                    | PZ 23   |                                    | PZ 23   |                                    | PZ 23   |                                    | PZ 23   |                                    | PZ 23   |                                    | PZ 23  |                                     | PZ 23   |   | PZ 23   |   | PZ 27   |   |  |
| <b>Construction</b>   |  | Shear   |                                    | Shear   |                                    | Shear   |                                    | Shear   |                                    | Shear   |                                    | Shear   |                                    | ThetaShear™                                    |                                     | OrthoShear™   |   | OrthoShear™   |   | OrthoShear™   |   |  |
| <b>Sealing</b>  |  | Hermetic  |                                    | Hermetic  |                                    | Hermetic  |                                    | Hermetic  |                                    | Hermetic  |                                    | Hermetic  |                                    | Welded   |                                     | Welded  |   | Welded  |   | Welded  |   |  |
| <b>Electrical Connector</b>   |  | 4-pin, 1/4"-28 UNF                                    |                                    | 4-pin, 1/4"-28 UNF                                    |                                    | 4-pin, 1/4"-28 UNF                                    |                                    | 4-pin, 1/4"-28 UNF                                    |                                    | 4-pin, 1/4"-28 UNF                                    |                                    | 4-pin, 1/4"-28 UNF                                    |                                    | 3 × 10-32 UNF -2A                              |                                     | Microtech-compatible, 4-pin, 1/4"-28 UNF (titanium) |   | Microtech-compatible, 4-pin, 1/4"-28 UNF (titanium) |   | Microtech-compatible, 4-pin, 1/4"-28 UNF (titanium) |   |  |
| <b>Mounting</b>   |  | M3 threaded hole or Adhesive                          |                                    | M3 threaded hole or Adhesive                          |                                    | M3 threaded hole or Adhesive                          |                                    | M3 threaded hole or Adhesive                          |                                    | M3 threaded hole or Adhesive                          |                                    | M3 threaded hole or Adhesive                          |                                    | Mounting clip, adhesive, M2 screws or M3 stud  |                                     | 1 × 1.6 mm slots for clip mounting on five sides    |   | 1 × 1.6 mm slots for clip mounting on five sides    |   | 1 × 1.6 mm slots for clip mounting on five sides    |   |  |

\* All three axes must be powered. Single or dual-axis supply is not available  
† Mounted in mounting clip  
‡ Mounted in mounting clip or on adhesive tape 0.09 mm thick

Structural, Modal, Human Body Vibration and Industrial Triaxial CCLD Accelerometers

| Type No.   | Structural and Modal          |                        |  |          |                           |  |          |                              |  |          |                              | Human Body Vibration |       |   | Industrial |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
|--|-------------------------------|------------------------|--|----------|---------------------------|--|----------|------------------------------|--|----------|------------------------------|----------------------|-------|---|------------|---------|---|--|-------------|---|--|-------------|---|--|--------|---|--|-------------|---|--|------|---|--|--|---|--|--|-----------------|--|--|-------------|--|--|-------------|--|--|
|  | 4520                          |                        |  | 4520-002 |                           |  | 4520-001 |                              |  | 4520-004 |                              |                      | 4524* |   |            | 4524-B* |   |  | 4524-B-001* |   |  | 4524-B-004* |   |  | 4515-B |   |  | 4515-B-002* |   |  | 8345 |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| <b>GENERAL</b>   |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Weight (excluding cable, wherever applicable)                                      | gram                          | 2.9                    |  |          | 3.6                       |  |          | 4                            |  |          | 4                            |                      |       | 4.4   |            |         | 4.4   |  |             | 4.4   |  |             | 4.4   |  |        | 345   |  |             | 345   |  |      | 40  |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
|  | oz                            | 0.1                    |  |          | 0.127                     |  |          | 0.14                         |  |          | 0.14                         |                      |       | 0.15  |            |         | 0.15  |  |             | 0.15  |  |             | 0.15  |  |        | 12.2  |  |             | 12.2  |  |      | 1.41  |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Voltage Sensitivity (at 159.2 Hz and 4 mA supply current)                          | mV/ms <sup>-2</sup>           | 1.02                   |  |          | 1.02                      |  |          | 1.02                         |  |          | 0.1                          |                      |       | 10  |            |         | 10  |  |             | 1   |  |             | 5   |  |        | 10  |  |             | 10  |  |      | 10  |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
|  | mV/g                          | 10                     |  |          | 10                        |  |          | 10                           |  |          | 1                            |                      |       | 98  |            |         | 98  |  |             | 9.8   |  |             | 49  |  |        | 98  |  |             | 98  |  |      | 98  |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Frequency Range  | Amplitude (±10%)              | Hz                     |  |          | X: 2 to 7000              |  |          | Y: 2 to 7000                 |  |          | Z: 2 to 7000                 |                      |       | X: 2 to 4000                                    |            |         | Y: 2 to 4000                                    |  |             | Z: 2 to 7000                                    |  |             | X: 2 to 4000                                    |  |        | Y: 2 to 4000                                    |  |             | Z: 2 to 7000                                    |  |      | X: 0.2 to 5500                                  |  |  | Y: 0.25 to 3000                                 |  |  | Z: 0.25 to 3000 |  |  |             |  |  |             |  |  |
|  | Phase (±5°)                   | Hz                     |  |          | X: 2 to 7000              |  |          | Y: 2 to 7000                 |  |          | Z: 2 to 7000                 |                      |       | X: 2 to 4000                                    |            |         | Y: 2 to 4000                                    |  |             | Z: 2 to 7000                                    |  |             | X: 2 to 4000                                    |  |        | Y: 2 to 4000                                    |  |             | Z: 2 to 7000                                    |  |      | X: 1.5 to 3000                                  |  |  | Y: 1.5 to 3000                                  |  |  | Z: 1.5 to 3000  |  |  |             |  |  |             |  |  |
| Mounted Resonance Frequency  | kHz                           | X: 40                  |  |          | Y: 30                     |  |          | Z: 30                        |  |          | X: 20                        |                      |       | Y: 25   |            |         | Z: 30   |  |             | X: 20   |  |             | Y: 25   |  |        | Z: 30   |  |             | X: 20   |  |      | Y: 25   |  |  | Z: 30   |  |  | X:18            |  |  | Y: 9        |  |  | Z: 9        |  |  |
|  |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Max. Transverse Sensitivity (at 30 Hz, 100 ms <sup>-2</sup> )                      | %                             | <5                     |  |          | <5                        |  |          | <5                           |  |          | <5                           |                      |       | <5  |            |         | <5  |  |             | <5  |  |             | <5  |  |        | <5  |  |             | <5  |  |      | <5  |  |  | <5  |  |  | <5              |  |  | <5          |  |  |             |  |  |
|  |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Transverse Resonance Frequency   | kHz                           |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
|  |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Measuring range (± peak)   | kms <sup>-2</sup>             | 4.9                    |  |          | 4.9                       |  |          | 4.9                          |  |          | 4.9                          |                      |       | 0.5   |            |         | 0.5   |  |             | 5   |  |             | 1   |  |        | 5   |  |             | 5   |  |      | 5   |  |  | 5   |  |  | 5               |  |  | 5           |  |  |             |  |  |
|  | g                             | 500                    |  |          | 500                       |  |          | 500                          |  |          | 5000                         |                      |       | 50  |            |         | 50  |  |             | 500   |  |             | 100   |  |        | 500   |  |             | 500   |  |      | 500   |  |  | 500   |  |  | 51              |  |  | 51          |  |  |             |  |  |
| TEDS   |                               | No                     |  |          | No                        |  |          | No                           |  |          | No                           |                      |       | No  |            |         | Yes   |  |             | Yes   |  |             | Yes   |  |        | Yes   |  |             | Yes   |  |      | Yes   |  |  | Yes   |  |  | Yes             |  |  | No          |  |  |             |  |  |
|  |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| <b>ELECTRICAL</b>  |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Bias Voltage   | at 25 °C and 4 mA             | V                      |  |          | 8.5 to 11.5               |  |          | 8.5 to 11.5                  |  |          | 8.5 to 11.5                  |                      |       | 8.5 to 11.5                                     |            |         | 12 ± 1  |  |             | 13 ± 1  |  |             | 13 ± 1  |  |        | 13 ± 1  |  |             | 13 ± 1  |  |      | 13 ± 1  |  |  | 12 ± 1  |  |  | 12 ± 1          |  |  |             |  |  |             |  |  |
|  | at full temp. and curr. range | 8 to 16                |  |          | 8 to 16                   |  |          | 8 to 16                      |  |          | 8 to 16                      |                      |       | 8 to 16   |            |         | 12 ± 1  |  |             | 13 ± 1  |  |             | 13 ± 1  |  |        | 13 ± 1  |  |             | 13 ± 1  |  |      | 13 ± 1  |  |  | 13 ± 1  |  |  | 12 ± 1          |  |  |             |  |  |             |  |  |
| Power Supply   | Constant current              | mA                     |  |          | 2 to 10                   |  |          | 2 to 10                      |  |          | 2 to 10                      |                      |       | 2 to 10   |            |         | 2 to 10   |  |             | 2 to 10   |  |             | 2 to 10   |  |        | 2 to 10   |  |             | 2 to 10   |  |      | 2 to 10   |  |  | 2 to 10   |  |  | 2 to 10         |  |  |             |  |  |             |  |  |
|  | Unloaded supply voltage       | V                      |  |          | 24 to 30                  |  |          | 24 to 30                     |  |          | 24 to 30                     |                      |       | 24 to 30  |            |         | 24 to 30  |  |             | 24 to 30  |  |             | 24 to 3   |  |        | 24 to 30  |  |             | 24 to 30  |  |      | 24 to 30  |  |  | 23 to 32  |  |  | 23 to 32        |  |  |             |  |  |             |  |  |
| Output Impedance   |                               | Ω                      |  |          | <100                      |  |          | <100                         |  |          | <100                         |                      |       | <2  |            |         | <30   |  |             | <30   |  |             | <30   |  |        | <30   |  |             | <30   |  |      | <30   |  |  | <2  |  |  |                 |  |  |             |  |  |             |  |  |
|  |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Start-up time (to final bias ± 10%)  | s                             | <1                     |  |          | <1                        |  |          | <1                           |  |          | <1                           |                      |       | <10   |            |         | <10   |  |             | <10   |  |             | <10   |  |        | <10   |  |             | <10   |  |      | <10   |  |  | <10   |  |  |                 |  |  |             |  |  |             |  |  |
|  |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Residual Noise (inherent RMS broadband noise in the specified frequency range)     | μV                            | <70                    |  |          | <70                       |  |          | <70                          |  |          | <56                          |                      |       | X: <40  |            |         | Y: <20  |  |             | Z: <20  |  |             | X: <40  |  |        | Y: <20  |  |             | Z: <20  |  |      | X: 50   |  |  | Y: 40   |  |  | Z: 40           |  |  |             |  |  |             |  |  |
|  | μg                            | <7000                  |  |          | <7000                     |  |          | <7000                        |  |          | <56000                       |                      |       | X: <400   |            |         | Y: <200   |  |             | Z: <200   |  |             | X: <400   |  |        | Y: <200   |  |             | Z: <200   |  |      | X: 500  |  |  | Y: 400  |  |  | Z: 400          |  |  |             |  |  |             |  |  |
| Noise (spectral)   | 10 Hz                         | mms <sup>-2</sup> /√Hz |  |          | 30 (3)                    |  |          | 30 (3)                       |  |          | X: 0.16 (16)                 |                      |       | Y: 0.08 (8)                                     |            |         | Z: 0.08 (8)                                     |  |             | X: 0.16 (16)                                    |  |             | Y: 0.08 (8)                                     |  |        | Z: 0.08 (8)                                     |  |             | X: 0.2 (20)                                     |  |      | Y: 0.16 (16)                                    |  |  | Z: 0.16 (16)                                    |  |  | X: 0.1 (10)     |  |  | Y: 0.07 (7) |  |  | Z: 0.07 (7) |  |  |
|  | 100 Hz                        | μg/√Hz                 |  |          | 10 (1)                    |  |          | 10 (1)                       |  |          | X: 0.04 (4)                  |                      |       | Y: 0.02 (2)                                     |            |         | Z: 0.02 (2)                                     |  |             | X: 0.04 (4)                                     |  |             | Y: 0.02 (2)                                     |  |        | Z: 0.02 (2)                                     |  |             | X: 0.05 (5)                                     |  |      | Y: 0.04 (4)                                     |  |  | Z: 0.04 (4)                                     |  |  | X: 0.04 (4)     |  |  | Y: 0.02 (2) |  |  | Z: 0.02 (2) |  |  |
|  | 1000 Hz                       |                        |  |          | 6 (0.6)                   |  |          | 6 (0.6)                      |  |          | X: 0.02 (2)                  |                      |       | Y: 0.01 (1)                                     |            |         | Z: 0.01 (1)                                     |  |             | X: 0.02 (2)                                     |  |             | Y: 0.01 (1)                                     |  |        | Z: 0.01 (1)                                     |  |             | X: 0.025 (2.5)                                  |  |      | Y: 0.02 (2)                                     |  |  | Z: 0.02 (2)                                     |  |  | X: 0.02 (2)     |  |  | Y: 0.01 (1) |  |  | Z: 0.01 (1) |  |  |
| Insulation Resistance (body to mounting surface)                                   | MΩ                            |                        |  |          |                           |  |          |                              |  |          |                              |                      |       | >1 (Signal ground is isolated from the housing) |            |         | >1 (Signal ground is isolated from the housing) |  |             | >1 (Signal ground is isolated from the housing) |  |             | >1 (Signal ground is isolated from the housing) |  |        | >1 (Signal ground is isolated from the housing) |  |             | >1 (Signal ground is isolated from the housing) |  |      | >1 (Signal ground is isolated from the housing) |  |  | >1 (Signal ground is isolated from the housing) |  |  |                 |  |  |             |  |  |             |  |  |
|  | GΩ                            | Case grounded          |  |          | Case grounded             |  |          | Case grounded                |  |          | Case grounded                |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| <b>ENVIRONMENTAL</b>   |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Operating Temperature Range  | °C                            | -51 to +121            |  |          | -51 to +121               |  |          | -51 to +121                  |  |          | -51 to +121                  |                      |       | -54 to +100                                     |            |         | -54 to +100                                     |  |             | -54 to +100                                     |  |             | -54 to +100                                     |  |        | -54 to +100                                     |  |             | -10 to +70 (short periods: -60 to +100)         |  |      | -10 to +70 (short periods: -60 to +100)         |  |  | -54 to +125                                     |  |  |                 |  |  |             |  |  |             |  |  |
|  | °F                            | -60 to +250            |  |          | -60 to +250               |  |          | -60 to +250                  |  |          | -60 to +250                  |                      |       | -65 to +212                                     |            |         | -65 to +212                                     |  |             | -65 to +212                                     |  |             | -65 to +212                                     |  |        | -65 to +212                                     |  |             | -65 to +212                                     |  |      | +14 to +158 (short periods: -76 to +212)        |  |  | +14 to +158 (short periods: -76 to +212)        |  |  | -65 to +257     |  |  |             |  |  |             |  |  |
| Temperature Coefficient of Sensitivity   | %/°C                          | 0.05                   |  |          | 0.05                      |  |          | 0.05                         |  |          | 0.05                         |                      |       | 0.14  |            |         | 0.14  |  |             | 0.14  |  |             | 0.14  |  |        | 0.14  |  |             | 0.14  |  |      | 0.14  |  |  | 0.14  |  |  | 0.09            |  |  |             |  |  |             |  |  |
|  |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Temperature Transient Sensitivity (3 Hz Lower Limiting Freq. (-3 dB, 6 dB/octave)) | ms <sup>-2</sup> /°C          | 0.09                   |  |          | 0.09                      |  |          | 0.09                         |  |          | 3.6                          |                      |       | 0.002   |            |         | 0.002   |  |             | 0.05  |  |             | 0.002   |  |        | 0.002   |  |             | 0.002   |  |      | 0.002   |  |  | 0.002   |  |  | 1               |  |  |             |  |  |             |  |  |
|  | g/°F                          | 0.00495                |  |          | 0.00495                   |  |          | 0.00495                      |  |          | 0.36                         |                      |       | 0.00011   |            |         | 0.00011   |  |             | 0.00275   |  |             | 0.00011   |  |        | 0.00011   |  |             | 0.00011   |  |      | 0.00011   |  |  | 0.00011   |  |  | 0.055           |  |  |             |  |  |             |  |  |
| Magnetic Sensitivity (50 Hz, 0.038 T)  | ms <sup>-2</sup> /T           | 40                     |  |          | 40                        |  |          | 40                           |  |          | 40                           |                      |       | 20  |            |         | 20  |  |             | 20  |  |             | 20  |  |        | 20  |  |             | 20  |  |      | 20  |  |  | 20  |  |  | 20              |  |  |             |  |  |             |  |  |
|  | g/kg                          | 0.4                    |  |          | 0.4                       |  |          | 0.4                          |  |          | 0.4                          |                      |       | 0.2   |            |         | 0.2   |  |             | 0.2   |  |             | 0.2   |  |        | 0.2   |  |             | 0.2   |  |      | 0.2   |  |  | 0.2   |  |  | 0.2             |  |  |             |  |  |             |  |  |
| Base Strain Sensitivity (at 250 με in base plane)                                  | ms <sup>-2</sup> /με          | 0.3                    |  |          | 0.15                      |  |          | 0.15                         |  |          | 0.15                         |                      |       | 0.0005†   |            |         | 0.0005†   |  |             | 0.0005†   |  |             | 0.0005†   |  |        | 0.0005†   |  |             | 0.0005†   |  |      | 0.0005†   |  |  | 0.0005†   |  |  | 0.01            |  |  |             |  |  |             |  |  |
|  | g/με                          | 0.03                   |  |          | 0.015                     |  |          | 0.015                        |  |          | 0.015                        |                      |       | 0.00005†  |            |         | 0.00005†  |  |             | 0.00005†  |  |             | 0.00005†  |  |        | 0.00005†  |  |             | 0.00005†  |  |      | 0.00005†  |  |  | 0.00005†  |  |  | 0.001           |  |  |             |  |  |             |  |  |
| Max. Non-destructive Shock (peak)  | kms <sup>-2</sup>             | 49                     |  |          | 49                        |  |          | 49                           |  |          | 49                           |                      |       | 50  |            |         | 50  |  |             | 50  |  |             | 50  |  |        | 50  |  |             | 50  |  |      | 50  |  |  | 50  |  |  | 50              |  |  | 50          |  |  |             |  |  |
|  | g                             | 5000                   |  |          | 5000                      |  |          | 5000                         |  |          | 5000                         |                      |       | 5000  |            |         | 5000  |  |             | 5000  |  |             | 5000  |  |        | 5000  |  |             | 5000  |  |      | 5000  |  |  | 5000  |  |  | 5000            |  |  | 5100        |  |  |             |  |  |
| <b>MECHANICAL</b>  |                               |                        |  |          |                           |  |          |                              |  |          |                              |                      |       |   |            |         |   |  |             |   |  |             |   |  |        |   |  |             |   |  |      |   |  |  |   |  |  |                 |  |  |             |  |  |             |  |  |
| Case Material  |                               | Titanium               |  |          | Titanium                  |  |          | Titanium                     |  |          | Titanium                     |                      |       | Titanium ASTM Grade 2                           |            |         | Titanium ASTM Grade 2                           |  |             | Titanium ASTM Grade 2                           |  |             | Titanium ASTM Grade 2                           |  |        | Titanium ASTM Grade 2                           |  |             | Oil resistant nitrile rubber                    |  |      | Oil resistant nitrile rubber                    |  |  | Stainless steel AISI 316-L5                     |  |  |                 |  |  |             |  |  |             |  |  |
| Piezoelectric Sensing Element  |                               | Quartz                 |  |          | Quartz                    |  |          | Quartz                       |  |          | Quartz                       |                      |       | PZ 27   |            |         | PZ 27   |  |             | PZ 23   |  |             | PZ 27   |  |        | PZ 27   |  |             | PZ 27 (built-in accelerometer)                  |  |      | PZ 27 (built-in accelerometer)                  |  |  | PZ 23   |  |  |                 |  |  |             |  |  |             |  |  |
| Construction   |                               | Planar Shear           |  |          | Planar Shear              |  |          | Planar Shear                 |  |          | Planar Shear                 |                      |       | OrthoShear™                                     |            |         | OrthoShear™                                     |  |             | OrthoShear™                                     |  |             | OrthoShear™                                     |  |        | OrthoShear™                                     |  |             | OrthoShear™ (built-in accelerometer)            |  |      | OrthoShear™ (built-in accelerometer)            |  |  | OrthoShear™ (built-in accelerometer)            |  |  |                 |  |  |             |  |  |             |  |  |
| Sealing  |                               | Hermetic               |  |          | Hermetic                  |  |          | Hermetic                     |  |          | Hermetic                     |                      |       | Hermetic  |            |         | Hermetic  |  |             | Hermetic  |  |             | Hermetic  |  |        | Hermetic  |  |             | Hermetic (built-in accelerometer)               |  |      | Hermetic (built-in accelerometer)               |  |  | Hermetic  |  |  |                 |  |  |             |  |  |             |  |  |
| Electrical Connector   |                               | 4-pin, 1/4"-28 UNF     |  |          | 4-pin, 1/4"-28 UNF        |  |          | 4-pin, 1/4"-28 UNF           |  |          | 4-pin, 1/4"-28 UNF           |                      |       | 4-pin, 1/4"-28 UNF                              |            |         | 4-pin, 1/4"-28 UNF                              |  |             | 4-pin, 1/4"-28 UNF                              |  |             | 4-pin, 1/4"-28 UNF                              |  |        | 4-pin, 1/4"-28 UNF                              |  |             | 3 × 10-32 UNF -2A                               |  |      | 4-pin LEMO                                      |  |  | 4-pin Glenair® 800 series                       |  |  |                 |  |  |             |  |  |             |  |  |
| Mounting   |                               | Adhesive               |  |          | Adhesive or Clip mounting |  |          | M3 threaded hole or Adhesive |  |          | M3 threaded hole or Adhesive |                      |       | Clip or Adhesive                                |            |         | Clip or Adhesive                                |  |             | Clip or Adhesive                                |  |             | Clip or Adhesive                                |  |        | Clip or Adhesive                                |  |             | Strapped, pressed or glued                      |  |      | Strapped, pressed or glued                      |  |  | 3 × M4 in isosceles triangle                    |  |  |                 |  |  |             |  |  |             |  |  |

\* All three axes must be powered. Single or dual-axis supply is not available.  
 † Built-in accelerometer  
 ‡ Mounted in mounting clip or on adhesive tape 0.09 mm thick





# PIEZORESISTIVE ACCELEROMETER COMPARISON TABLE

Brüel & Kjær's piezoresistive accelerometers, DC Response Accelerometers Type 4570 – 4575 are designed to measure low-frequency vibration down to DC. The gas-damped sensing element offers a wide dynamic range and very stable frequency response even after subjection to high shock levels. The accelerometer has built-in conditioning, where the sensing element and electronics are shielded, sealed and insulated from the housing.


This table lists key specifications for these accelerometers, including the D versions, enabling you to get a quick overview for easier comparison and selection.

Pull out for [COMPARISON TABLE >>>](#)

## Uniaxial Piezoresistive Accelerometers

| Type No.   |                         | 4570   | 4570-D                  | 4571                    | 4571-D                  | 4572                    | 4572-D                  | 4573                    | 4573-D                  | 4574                    | 4574-D                  | 4575                    | 4575-D                  |
|--|-------------------------|--|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|-------------------------|
| <b>GENERAL</b>   |                         |  |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |
| <b>Weight (excluding cable, wherever applicable)</b>                                       | gram                    | 8  | 8                       | 8                       | 8                       | 8                       | 8                       | 8                       | 8                       | 8                       | 8                       | 8                       | 8                       |
|  | oz                      | 0.29   | 0.29                    | 0.29                    | 0.29                    | 0.29                    | 0.29                    | 0.29                    | 0.29                    | 0.29                    | 0.29                    | 0.29                    | 0.29                    |
| <b>Voltage Sensitivity (at 159.2 Hz and 4 mA supply current)</b>                           | mV/ms <sup>-2</sup>     | 0.4  | 0.4                     | 1                       | 1                       | 2                       | 2                       | 6.7                     | 6.7                     | 20                      | 20                      | 100                     | 100                     |
|  | mV/g                    | 4  | 4                       | 10                      | 10                      | 20                      | 20                      | 67                      | 67                      | 200                     | 200                     | 1000                    | 1000                    |
| <b>Frequency Range: Amplitude (±10% limit)</b>   | Hz                      | 0 to 1850  | 0 to 1850               | 0 to 1850               | 0 to 1850               | 0 to 1850               | 0 to 1850               | 0 to 850                | 0 to 850                | 0 to 500                | 0 to 500                | 0 to 300                | 0 to 300                |
| <b>Frequency Range: Phase (±5° limit)</b>  | Hz                      | 0 to 160   | 0 to 160                | 0 to 160                | 0 to 160                | 0 to 160                | 0 to 160                | 0 to 75                 | 0 to 75                 | 0 to 45                 | 0 to 45                 | 0 to 25                 | 0 to 25                 |
| <b>Max. Transverse Sensitivity (at 30 Hz, 100 ms<sup>-2</sup>)</b>                         | %                       | <3   | <3                      | <3                      | <3                      | <3                      | <3                      | <3                      | <3                      | <3                      | <3                      | <3                      | <3                      |
| <b>Max. Zero Acceleration Output (relative to V<sub>ref</sub>)</b>                         | mV                      | <50  | <50                     | <50                     | <50                     | <50                     | <50                     | <50                     | <50                     | <50                     | <50                     | <50                     | <50                     |
| <b>Measuring range (± peak)</b>  | ms <sup>-2</sup>        | 5000   | 5000                    | 2000                    | 2000                    | 1000                    | 1000                    | 300                     | 300                     | 100                     | 100                     | 20                      | 20                      |
|  | g                       | 500  | 500                     | 200                     | 200                     | 100                     | 100                     | 30                      | 30                      | 10                      | 10                      | 2                       | 2                       |
| <b>ELECTRICAL</b>  |                         |  |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |
| <b>V<sub>ref</sub> at full temperature and current range</b>                               | V                       | 2.5 ±0.005   | 2.5 ±0.005              | 2.5 ±0.005              | 2.5 ±0.005              | 2.5 ±0.005              | 2.5 ±0.005              | 2.5 ±0.005              | 2.5 ±0.005              | 2.5 ±0.005              | 2.5 ±0.005              | 2.5 ±0.005              | 2.5 ±0.005              |
| <b>Power Supply</b>  | Current consumption     | mA   | <5                      | <5                      | <5                      | <5                      | <5                      | <5                      | <5                      | <5                      | <5                      | <5                      | <5                      |
|  | Unloaded supply voltage | V  | 8 to 24                 | 8 to 24                 | 8 to 24                 | 8 to 24                 | 8 to 24                 | 8 to 24                 | 8 to 24                 | 8 to 24                 | 8 to 24                 | 8 to 24                 | 8 to 24                 |
| <b>Output Impedance</b>  | Ω                       | <100   | <100                    | <100                    | <100                    | <100                    | <100                    | <100                    | <100                    | <100                    | <100                    | <100                    | <100                    |
| <b>Start-up time (to final bias ±10%)</b>  | s                       | <10  | <10                     | <10                     | <10                     | <10                     | <10                     | <10                     | <10                     | <10                     | <10                     | <10                     | <10                     |
| <b>Residual Noise (inherent RMS broadband noise in the specified ±10% frequency range)</b> | μV                      | <600   | <600                    | <650                    | <650                    | <450                    | <450                    | <700                    | <700                    | <350                    | <350                    | <500                    | <500                    |
|  | mg                      | <150   | <150                    | <65                     | <65                     | <22.5                   | <22.5                   | <10.45                  | <10.45                  | <1.75                   | <1.75                   | <0.5                    | <0.5                    |
| <b>Noise (spectral)</b>  | 10 Hz                   | mms <sup>-2</sup> /Hz  | 35 (3.5)                | 35 (3.5)                | 15 (1.5)                | 15 (1.5)                | 5 (0.5)                 | 5 (0.5)                 | 3.5 (0.35)              | 3.5 (0.35)              | 0.750 (0.075)           | 0.750 (0.075)           | 0.300 (0.030)           |
|  | 100 Hz                  | (mg/Hz)  | 35 (3.5)                | 35 (3.5)                | 15 (1.5)                | 15 (1.5)                | 5 (0.5)                 | 5 (0.5)                 | 3.5 (0.35)              | 3.5 (0.35)              | 0.750 (0.075)           | 0.750 (0.075)           | 0.300 (0.030)           |
|  | 1000 Hz                 |  | 35 (3.5)                | 35 (3.5)                | 15 (1.5)                | 15 (1.5)                | 5 (0.5)                 | 5 (0.5)                 | 3.5 (0.35)              | 3.5 (0.35)              | 0.750 (0.075)           | 0.750 (0.075)           | 0.300 (0.030)           |
| <b>Insulation Resistance (body to mounting surface)</b>                                    | MΩ                      | >100   | >100                    | >100                    | >100                    | >100                    | >100                    | >100                    | >100                    | >100                    | >100                    | >100                    | >100                    |
| <b>ENVIRONMENTAL</b>   |                         |  |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |
| <b>Operating Temperature Range</b>   | °C                      | -55 to +121  | -55 to +121             | -55 to +121             | -55 to +121             | -55 to +121             | -55 to +121             | -55 to +121             | -55 to +121             | -55 to +121             | -55 to +121             | -55 to +121             | -55 to +121             |
|  | °F                      | -67 to +250  | -67 to +250             | -67 to +250             | -67 to +250             | -67 to +250             | -67 to +250             | -67 to +250             | -67 to +250             | -67 to +250             | -67 to +250             | -67 to +250             | -67 to +250             |
| <b>Zero Acceleration Shift</b>   | (-20 to +85 °C)         | mV   | <40                     | <40                     | <40                     | <40                     | <40                     | <40                     | <40                     | <40                     | <40                     | <40                     | <40                     |
|  | (-20 to +121 °C)        |  |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |
| <b>Temperature Coefficient of Sensitivity</b>  | (-20 to +85 °C)         | %/°C   | ±2.1                    | ±3                      | ±2.1                    | ±3                      | ±2.1                    | ±3                      | ±2.1                    | ±3                      | ±2.1                    | ±3                      | ±3                      |
|  | (-20 to +121 °C)        |  |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |
| <b>Temperature Transient Sensitivity (3 Hz Lower Limiting Freq., 20 dB/decade)</b>         | ms <sup>-2</sup> /°C    | 0.5  | 0.5                     | 0.5                     | 0.5                     | 0.5                     | 0.5                     | 0.2                     | 0.2                     | 0.1                     | 0.1                     | 0.5                     | 0.5                     |
|  | g/°F                    | 0.0275   | 0.0275                  | 0.0275                  | 0.0275                  | 0.0275                  | 0.0275                  | 0.011                   | 0.011                   | 0.01                    | 0.01                    | 0.0275                  | 0.0275                  |
| <b>Magnetic Sensitivity (50 Hz, 0.038 T)</b>   | ms <sup>-2</sup> /T     | 400  | 400                     | 120                     | 120                     | 70                      | 70                      | 40                      | 40                      | 20                      | 20                      | 4                       | 4                       |
|  | g/kG                    | 40   | 40                      | 1.2                     | 1.2                     | 0.7                     | 0.7                     | 0.4                     | 0.4                     | 0.2                     | 0.2                     | 0.04                    | 0.04                    |
| <b>Base Strain Sensitivity (in the base plane at 250 με)</b>                               | ms <sup>-2</sup> /με    | 0.2  | 0.2                     | 0.2                     | 0.2                     | 0.2                     | 0.2                     | 0.03                    | 0.03                    | 0.05                    | 0.05                    | 0.06                    | 0.06                    |
|  | g/με                    | 0.02   | 0.02                    | 0.02                    | 0.02                    | 0.02                    | 0.02                    | 0.003                   | 0.003                   | 0.005                   | 0.005                   | 0.006                   | 0.006                   |
| <b>Max. Non-destructive Shock (± peak)</b>   | kms <sup>-2</sup>       | 100  | 100                     | 100                     | 100                     | 100                     | 100                     | 100                     | 100                     | 100                     | 100                     | 100                     | 100                     |
|  | g                       | 10000  | 10000                   | 10000                   | 10000                   | 10000                   | 10000                   | 10000                   | 10000                   | 10000                   | 10000                   | 10000                   | 10000                   |
| <b>MECHANICAL</b>  |                         |  |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |
| <b>Case Material</b>   |                         | Anodized Aluminium   | Anodized Aluminium      | Anodized Aluminium      | Anodized Aluminium      | Anodized Aluminium      | Anodized Aluminium      | Anodized Aluminium      | Anodized Aluminium      | Anodized Aluminium      | Anodized Aluminium      | Anodized Aluminium      | Anodized Aluminium      |
| <b>Sensing Element</b>   |                         | Piezo resistors  | Piezo resistors         | Piezo resistors         | Piezo resistors         | Piezo resistors         | Piezo resistors         | Piezo resistors         | Piezo resistors         | Piezo resistors         | Piezo resistors         | Piezo resistors         | Piezo resistors         |
| <b>Construction</b>  |                         | 4-arm wheatstone bridge  | 4-arm wheatstone bridge | 4-arm wheatstone bridge | 4-arm wheatstone bridge | 4-arm wheatstone bridge | 4-arm wheatstone bridge | 4-arm wheatstone bridge | 4-arm wheatstone bridge | 4-arm wheatstone bridge | 4-arm wheatstone bridge | 4-arm wheatstone bridge | 4-arm wheatstone bridge |
| <b>Sealing</b>   |                         | Sensing element: Hermetically sealed<br>Housing: Epoxy sealed  |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |
| <b>Electrical Connector</b>  |                         | Integral cable<br>3 options available: 457X terminating in an open end; 457X-001 with 7-pin LEMO connector; 457X-002 with 9-pin sub-D connector) |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |
| <b>Mounting</b>  |                         | Through holes for 2 × 4–40 Head cap screw, (11 mm) with washer   |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |                         |

The accelerometers feature an internal temperature compensation (updated at intervals of 40 ms) that minimizes thermal zero shift and sensitivity shift over a wide temperature range. All types will operate from -55 to +121 °C. For standard versions, the thermal zero shift and thermal sensitivity shift are specified in the temperature range -20 to +85 °C. For high thermal stability, the D-versions are compensated from -55 to +121 °C – see graph below.

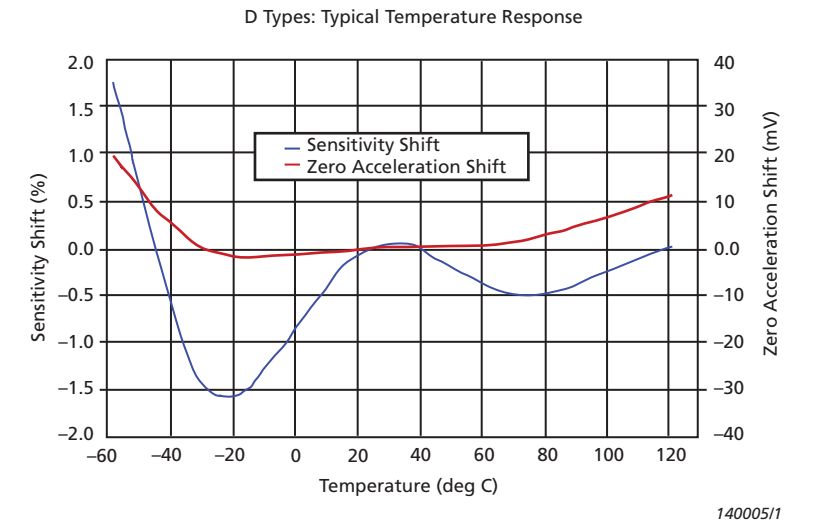



## Numerics

|                             |  |                            |  |
|-----------------------------|--|----------------------------|--|
| 1056 .....                  | 90   | 2699 .....                 | 35, 36, 40, 41                           |
| 11-0684 .....               | 121  | 2735 .....                 | 54, 68                                   |
| 1702 .....                  | 126  | 2829 .....                 | 123                                      |
| 1704-A .....                | 125  | 2981 .....                 | 86                                       |
| 1704-C-102 .....            | 125  | 2981-A .....               | 86                                       |
| 1705 .....                  | 126  | 2cc click-on coupler ..... | 58                                       |
| 1706 .....                  | 17, 35, 41   | 3451-A .....               | 38                                       |
| 1nF precision adaptor ..... | 121  | 3506 .....                 | 119                                      |
| 2231 .....                  | 50   | 3599 .....                 | 29, 30                                   |
| 2525 .....                  | 119, 124, 126                                      | 360° mounting .....        | 158                                      |
| 2619 .....                  | 36   | 3624 .....                 | 90                                       |
| 2627 .....                  | 36   | 3625 .....                 | 90                                       |
| 2633 .....                  | 36, 44   | 3626 .....                 | 90                                       |
| 2634 .....                  | 126  | 3627 .....                 | 90                                       |
| 2635 .....                  | 127  | 3628 .....                 | 90                                       |
| 2639 .....                  | 36, 44, 58   | 3629 .....                 | 119, 120, 131, 132                       |
| 2645 .....                  | 36   | 3654 .....                 | 29, 30                                   |
| 2647-A .....                | 127  | 4101-A .....               | 28, 29, 39                               |
| 2647-B .....                | 127  | 4128-C .....               | 54, 63                                   |
| 2647-C .....                | 127  | 4128-D .....               | 54, 63                                   |
| 2647-D .....                | 127  | 4130 .....                 | 19                                       |
| 2647-D-001 .....            | 127  | 4133 .....                 | 18                                       |
| 2647-D-002 .....            | 127  | 4134 .....                 | 18, 60                                   |
| 2647-D-003 .....            | 127  | 4135 .....                 | 18                                       |
| 2647-D-004 .....            | 127  | 4136 .....                 | 18                                       |
| 2647-D-005 .....            | 127  | 4137 .....                 | 15, 19                                   |
| 2647-E .....                | 127  | 4138 .....                 | 15, 22, 40, 144, 153                     |
| 2660 .....                  | 25, 36   | 4144 .....                 | 15, 22, 58, 153                          |
| 2660-W-001 .....            | 25, 36, 45   | 4145 .....                 | 15, 20, 153                              |
| 2663 .....                  | 126  | 4147 .....                 | 18                                       |
| 2663-B .....                | 126  | 4152 .....                 | 53, 56                                   |
| 2669 .....                  | 19, 22, 28, 35, 36, 40, 41, 43, 50, 57, 58, 60, 63 | 4153 .....                 | 53, 56                                   |
| 2669-001 .....              | 35   | 4153-W-001 .....           | 56                                       |
| 2669-C .....                | 144  | 4155 .....                 | 18                                       |
| 2669-W-001 .....            | 35   | 4157 .....                 | 53, 57                                   |
| 2670 .....                  | 19, 22, 31, 35, 36, 40, 41, 145                    | 4158-C .....               | 63                                       |
| 2670-W-001 .....            | 35   | 4160 .....                 | 15, 27, 153                              |
| 2670-WB-1419 .....          | 36   | 4165 .....                 | 18                                       |
| 2671 .....                  | 35, 36, 40, 41, 50, 58, 144                        | 4166 .....                 | 18                                       |
| 2671-W-001 .....            | 28, 36   | 4176 .....                 | 15, 19, 48, 153                          |
| 2673 .....                  | 27, 35, 36, 43, 50                                 | 4178 .....                 | 30, 153                                  |
| 2683 .....                  | 29, 30   | 4179 .....                 | 15, 25, 153                              |
| 2690-A .....                | 123  | 4180 .....                 | 15, 27, 153                              |
| 2691-A .....                | 123  | 4181 .....                 | 18                                       |
| 2692-A .....                | 127  | 4182 .....                 | 17, 28, 29, 45, 51                       |
| 2692-C .....                | 127  | 4184 .....                 | 26, 39, 49                               |
| 2693-A .....                | 124  | 4184-A .....               | 39                                       |
| 2694 .....                  | 3  | 4185 .....                 | 53, 60, 65                               |
| 2694-A .....                | 124  | 4187 .....                 | 15, 28, 29                               |
| 2695 .....                  | 35, 36, 58, 61                                     | 4188 .....                 | 15, 19, 26, 40, 48, 144, 153             |
| 2697 .....                  | 109  | 4189 .....                 | 15, 16, 17, 18, 19, 26, 40, 41, 144, 153 |
|                             |  | 4190 .....                 | 15, 18, 20, 26, 41, 144, 153             |

|                   |                                  |                  |                        |
|-------------------|----------------------------------|------------------|------------------------|
| 4191 .....        | 15, 18, 20, 41, 144, 153         | 4505-A .....     | 73, 95, 155            |
| 4192 .....        | 15, 18, 22, 41, 57, 58, 144, 153 | 4506 .....       | 83, 92, 148, 160       |
| 4193 .....        | 15, 18, 28, 41, 145, 153         | 4506-B .....     | 84, 92, 160            |
| 4195 .....        | 53, 60, 65                       | 4506-B-003 ..... | 84, 160                |
| 4195-A-HLO .....  | 53, 61                           | 4507 .....       | 92, 149, 157           |
| 4195-Q .....      | 53, 61                           | 4507-001 .....   | 157                    |
| 4195-Q-A .....    | 53, 61                           | 4507-002 .....   | 157                    |
| 4195-Q-HLO .....  | 53, 61                           | 4507-B .....     | 157                    |
| 4196 .....        | 18                               | 4507-B-001 ..... | 96, 157                |
| 4197 .....        | 18, 29, 30, 153                  | 4507-B-002 ..... | 157                    |
| 4198 .....        | 18, 26, 49, 50                   | 4507-B-003 ..... | 157                    |
| 4226 .....        | 37, 39                           | 4507-B-004 ..... | 157                    |
| 4227 .....        | 54, 62                           | 4507-B-005 ..... | 157                    |
| 4228 .....        | 37, 39                           | 4507-B-006 ..... | 157                    |
| 4229 .....        | 37                               | 4507-C .....     | 73, 156                |
| 4231 .....        | 37, 39                           | 4508 .....       | 92, 149, 157           |
| 4232 .....        | 54, 66                           | 4508-001 .....   | 157                    |
| 4294 .....        | 94, 120                          | 4508-002 .....   | 157                    |
| 4297 .....        | 38                               | 4508-B .....     | 78, 157                |
| 4321 .....        | 75, 102, 147, 156                | 4508-B-001 ..... | 78, 96, 157            |
| 4326 .....        | 75, 147                          | 4508-B-002 ..... | 78, 157                |
| 4326-001 .....    | 156                              | 4508-B-003 ..... | 157                    |
| 4326-A .....      | 75, 92, 95, 156                  | 4508-B-004 ..... | 78, 157                |
| 4326-A-001 .....  | 75, 92, 95, 156                  | 4508-B-03 .....  | 78                     |
| mounting of ..... | 104                              | 4508-C .....     | 73, 156                |
| 4370 .....        | 74, 102, 147, 155                | 4511 .....       | 149                    |
| 4371 .....        | 102, 147, 155                    | 4511-001 .....   | 80, 109, 158           |
| 4371-S .....      | 73                               | 4511-006 .....   | 80, 109, 158           |
| 4374 .....        | 72, 96, 102, 147, 155            | 4515-B .....     | 84, 161                |
| 4374-L .....      | 155                              | 4515-B-002 ..... | 84, 161                |
| 4375 .....        | 102, 147, 155                    | 4516 .....       | 76, 149, 158           |
| 4375-S .....      | 72                               | 4516-001 .....   | 76, 158                |
| 4381 .....        | 74, 102, 147, 155                | 4517 .....       | 76, 109, 149, 158      |
| 4382 .....        | 102, 147, 155                    | 4517-002 .....   | 76, 158                |
| 4382-S .....      | 74                               | 4517-C .....     | 72, 155                |
| 4383 .....        | 102, 147, 155                    | 4517-C-001 ..... | 72, 155                |
| 4383-S .....      | 74                               | 4517-C-003 ..... | 72, 155                |
| 4384 .....        | 102, 148, 155                    | 4518 .....       | 76, 108, 109, 149, 158 |
| 4384-S .....      | 73                               | 4518-001 .....   | 76, 158                |
| 4391 .....        | 74, 102, 148, 156                | 4518-002 .....   | 158                    |
| 4392 .....        | 96                               | 4518-003 .....   | 158                    |
| 4393 .....        | 70, 102, 148, 155                | 4519 .....       | 108, 109, 149, 158     |
| 4393-S .....      | 73                               | 4519-001 .....   | 158                    |
| 4394 .....        | 102, 108, 109, 148, 158          | 4519-002 .....   | 158                    |
| 4397 .....        | 102, 108, 109, 148               | 4519-003 .....   | 158                    |
| 4397-A .....      | 158                              | 4520 .....       | 82, 161                |
| 4447 .....        | 96, 108, 110, 111                | 4520-001 .....   | 82, 161                |
| 4500 .....        | 148                              | 4520-002 .....   | 82, 96, 161            |
| 4500-A .....      | 73, 92, 156                      | 4520-004 .....   | 82, 161                |
| 4501 .....        | 148                              | 4521 .....       | 108, 109, 149, 158     |
| 4501-A .....      | 73, 92, 156                      | 4521-C .....     | 73, 155                |
| 4504 .....        | 92                               | 4523 .....       | 80, 149, 158           |
| 4504-A .....      | 84, 160                          | 4524 .....       | 82, 92, 150, 161       |
| 4505 .....        | 148                              | 4524-B .....     | 82, 96, 161            |
| 4505-001 .....    | 73, 155                          | 4524-B-001 ..... | 83, 161                |

|                    |                              |                  |                                |
|--------------------|------------------------------|------------------|--------------------------------|
| 4524-B-004 .....   | 83, 161                      | 4942 .....       | 15, 21, 41, 145, 153           |
| 4526 .....         | 78, 150, 159                 | 4943 .....       | 15, 18, 21, 41, 145, 153       |
| 4526-001 .....     | 79, 159                      | 4944 .....       | 15, 22, 41, 153                |
| 4526-002 .....     | 79, 159                      | 4944-A .....     | 50, 145                        |
| 4527 .....         | 83, 92, 110, 150, 160        | 4944-W-005 ..... | 17                             |
| 4527-001 .....     | 83, 160                      | 4946 .....       | 53, 58                         |
| 4528 .....         | 92, 110, 150                 | 4947 .....       | 15, 22, 56, 58, 153            |
| 4528-B .....       | 83, 160                      | 4948 .....       | 15, 16, 22, 145                |
| 4528-B-001 .....   | 83, 160                      | 4948-A .....     | 22                             |
| 4533 .....         | 150                          | 4948-B .....     | 22                             |
| 4533-004 .....     | 79                           | 4948-W-005 ..... | 22                             |
| 4533-B .....       | 79, 158                      | 4949 .....       | 15, 16, 22, 146                |
| 4533-B-001 .....   | 79, 158                      | 4949-B .....     | 22                             |
| 4533-B-002 .....   | 79, 158                      | 4950 .....       | 15, 20, 153                    |
| 4533-B-004 .....   | 158                          | 4951 .....       | 18                             |
| 4534 .....         | 150                          | 4952 .....       | 18, 26, 49, 50, 146            |
| 4534-B .....       | 79, 158                      | 4953 .....       | 153                            |
| 4534-B-001 .....   | 79, 158                      | 4954 .....       | 15, 19, 41, 146, 153           |
| 4534-B-002 .....   | 79, 158                      | 4954-A .....     | 50                             |
| 4534-B-003 .....   | 79                           | 4955 .....       | 15, 16, 25, 41, 146            |
| 4534-B-004 .....   | 158                          | 4955-A .....     | 25                             |
| 4535 .....         | 92, 150                      | 4956 .....       | 15, 22, 41, 146, 153           |
| 4535-B .....       | 83, 160                      | 4957 .....       | 3, 15, 18, 24, 41, 50, 146     |
| 4535-B-001 .....   | 83, 160                      | 4958 .....       | 3, 15, 16, 18, 24, 41, 50, 146 |
| 4570 .....         | 84, 163                      | 4959 .....       | 3, 41, 61, 146                 |
| 4570-D .....       | 163                          | 4961 .....       | 16, 23, 39, 41, 50, 146        |
| 4571 .....         | 84, 163                      | 4961-B .....     | 23                             |
| 4571-D .....       | 163                          | 4964 .....       | 28, 153                        |
| 4572 .....         | 84, 163                      | 4965 .....       | 29                             |
| 4572-D .....       | 163                          | 5308 .....       | 120, 132                       |
| 4573 .....         | 84, 92, 163                  | 5309 .....       | 120, 131                       |
| 4573-D .....       | 163                          | 5310 .....       | 132                            |
| 4574 .....         | 84, 92, 163                  | 5311 .....       | 132                            |
| 4574-D .....       | 163                          | 5935-L .....     | 46, 123                        |
| 4575 .....         | 84, 92, 163                  | 5958 .....       | 150                            |
| 4575-D .....       | 163                          | 5958-A .....     | 81, 159                        |
| 457x series .....  | 84, 95, 109, 150             | 5958-H .....     | 81                             |
| 4602-B .....       | 54, 65                       | 5960 .....       | 67                             |
| 4606 .....         | 64                           | 5961 .....       | 91                             |
| 4808 .....         | 91, 121                      | 5997 .....       | 67                             |
| 4809 .....         | 91, 121                      | 5998 .....       | 27                             |
| 4810 .....         | 91                           | 8001 .....       | 88                             |
| 4824 .....         | 90                           | 8103 .....       | 32                             |
| 4825 .....         | 90                           | 8104 .....       | 32                             |
| 4826 .....         | 90                           | 8105 .....       | 32                             |
| 4827 .....         | 90                           | 8106 .....       | 32, 46                         |
| 4828 .....         | 90                           | 8203 .....       | 88                             |
| 4930 .....         | 54, 59                       | 8204 .....       | 89                             |
| 4935 .....         | 18                           | 8206 .....       | 89, 101                        |
| 4938 .....         | 15, 18, 22, 31, 41, 145, 153 | 8206-001 .....   | 89                             |
| 4938-W-001 .....   | 15, 31                       | 8206-002 .....   | 89                             |
| 4938-WH-1418 ..... | 15                           | 8206-003 .....   | 89                             |
| 4939 .....         | 15, 18, 19, 41, 145, 153     | 8207 .....       | 89, 101                        |
| 4940 .....         | 153                          | 8208 .....       | 89, 101                        |
| 4941 .....         | 15, 31, 41, 145, 153         | 8210 .....       | 89, 101                        |

|             |                   |
|-------------|-------------------|
| 8230        | 87, 101           |
| 8230 -C-003 | 87                |
| 8230-001    | 87                |
| 8230-002    | 87                |
| 8230-003    | 87                |
| 8231-C      | 87                |
| 8305        | 119, 156          |
| 8305-001    | 119, 156          |
| 8309        | 73, 150, 156      |
| 8315        | 74, 156           |
| 8324-100    | 74, 150           |
| 8324-G      | 81, 159           |
| 8324-G-001  | 81                |
| 8324-G-002  | 81                |
| 8339        | 79, 151, 159      |
| 8339-001    | 79, 159           |
| 8340        | 81, 159           |
| 8341        | 81, 151, 159      |
| 8344        | 81, 151, 159      |
| 8344-B-001  | 81, 159           |
| 8345        | 81, 111, 151, 161 |
| 8346-C      | 74, 151, 155      |
| 8347-C      | 71, 74, 150, 156  |
| 9640        | 54, 67, 131       |
| 9699        | 27, 131           |
| 9718        | 131               |
| 9721        | 132               |

|                        |   |
|------------------------|---|
| <b>A</b>               |   |
| Absorption             | 137                                       |
| Absorption coefficient | 137                                       |
| AC- 0066               | 114                                       |
| AC- 0208               | 114                                       |
| AC acceleration output | 129                                       |
| AC displacement output | 129                                       |
| AC velocity output     | 129                                       |
| AC-0005                | 44, 46, 106, 108, 110, 111, 114, 115, 116 |
| AC-0006                | 45, 46                                    |
| AC-0034                | 32, 46                                    |
| AC-0043                | 32, 46                                    |
| AC-0066                | 107, 108, 115, 116                        |
| AC-0077                | 113, 117                                  |
| AC-0079                | 46  |
| AC-0080                | 115, 117                                  |
| AC-0087                | 112, 117                                  |
| AC-0101                | 32, 46                                    |
| AC-0104                | 106, 107, 108, 114, 115, 116              |
| AC-0141                | 112                                       |
| AC-0194                | 112, 117                                  |
| AC-0195                | 107, 109, 115                             |
| AC-0200                | 106, 115, 116                             |
| AC-0201                | 112                                       |
| AC-0202                | 113, 117                                  |
| AC-0205                | 108, 109, 114, 115, 116                   |
| AC-0208                | 44, 45, 46, 107, 108, 110, 115, 116       |

|                              |                    |
|------------------------------|--------------------|
| AC-0219                      | 43, 46             |
| AC-0220                      | 110, 111, 115, 117 |
| AC-0223                      | 110, 111, 115, 117 |
| AC-0231                      | 61                 |
| AC-0289                      | 43, 44, 45, 46     |
| AC-0294                      | 109, 111           |
| AC-0299                      | 45, 46             |
| AC-0306                      | 113, 117           |
| AC-3028                      | 43, 46             |
| Acceleration                 | 137                |
| Accelerometer accessories    | 92                 |
| Accelerometer cables         | 105                |
| Accelerometer calibration    | 91, 119            |
| Accelerometer dimensions     | 147                |
| Accelerometer mass           | 104                |
| Accelerometer mounting       | 103                |
| Accelerometer specifications | 72                 |
| Accelerometers               | 72                 |
| conditioners                 | 124, 126           |
| definition                   | 137                |
| selecting                    | 69                 |
| standard cable length        | 105                |
| Accessories                  |                    |
| for accelerometers           | 92                 |
| for acoustic testing         | 66                 |
| Accessory sets               | 102, 114           |
| Accredited calibration       | 134                |
| Acoustic coupler             | 60                 |
| Acoustic test                | 66                 |
| Acoustics                    | 137                |
| Active sound field           | 137                |
| Actuator                     | 50                 |
| Adaptor cable                | 44                 |
| Adaptor for ITE hearing aids | 57                 |
| Adaptor for SLM              | 56                 |
| Adaptor for tripod           | 64                 |
| Adaptor plate for headphones | 56                 |
| Adaptor ring for calibration | 61                 |
| Adaptor sleeve               | 60                 |
| Adaptors                     | 51, 97, 114        |
| flexible                     | 48                 |
| for calibration              | 39                 |
| for clip mounting            | 95                 |
| for microphones              | 48                 |
| Adding gain                  | 128                |
| Adhesive tape                | 103                |
| Adhesives                    | 101                |
| Adjustable filters           | 128                |
| Adjustable input ranges      | 128                |
| AE-4003-D-020                | 86                 |
| Aerospace testing            | 84                 |
| Airbag microphone            | 31                 |
| Airborne CCLD amplifiers     | 126                |
| Airborne charge amplifiers   | 126                |
| Alarms                       | 129                |

|   |             |  |                |
|---|-------------|--|----------------|
| Ambient noise .....                           | 137         | AO-0698 .....                              | 109            |
| Amplified piezoresistive accelerometers ..... | 84          | AO-0699 .....                              | 45, 108        |
| Amplitude .....                               | 137         | AO-0700 .....                              | 109            |
| Amplitude distribution .....                  | 137         | AO-0701 .....                              | 111            |
| Analogue filtering .....                      | 129         | AO-0702 .....                              | 111            |
| Anechoic room .....                           | 137         | AO-0703 .....                              | 109            |
| Anechoic test box .....                       | 54, 55, 66  | AO-0704 .....                              | 107            |
| Angle pieces .....                            | 48          | AO-0714 .....                              | 110            |
| AO-0027 .....                                 | 43          | AO-0722 .....                              | 112            |
| AO-0028 .....                                 | 43          | AO-0729 .....                              | 113            |
| AO-0038 .....                                 | 51, 88, 106 | AO-0730 .....                              | 113            |
| AO-0087 .....                                 | 45          | AO-0740 .....                              | 110            |
| AO-0122 .....                                 | 60, 106     | AO-0741 .....                              | 106            |
| AO-0231 .....                                 | 108         | AO-0744 .....                              | 113            |
| AO-0250 .....                                 | 112, 114    | AO-0745 .....                              | 111            |
| AO-0283 .....                                 | 108         | AO-0746 .....                              | 109            |
| AO-0339 .....                                 | 88, 108     | AO-0747 .....                              | 113            |
| AO-0390 .....                                 | 33          | AO-0753 .....                              | 113            |
| AO-0406 .....                                 | 17, 107     | AO-0755 .....                              | 106            |
| AO-0414 .....                                 | 43, 109     | AO-0757 .....                              | 113            |
| AO-0419 .....                                 | 43, 60      | AO-0759 .....                              | 111            |
| AO-0422 .....                                 | 67          | AO-1381 .....                              | 108            |
| AO-0426 .....                                 | 45          | AO-1382 .....                              | 106            |
| AO-0428 .....                                 | 43          | AO-1419 .....                              | 107            |
| AO-0463 .....                                 | 44, 107     | AO-1454 .....                              | 111            |
| AO-0479 .....                                 | 44          | Applications .....                         | 7              |
| AO-0482 .....                                 | 108         | APS-500 .....                              | 121            |
| AO-0488 .....                                 | 43          | AQ-0015 .....                              | 56             |
| AO-0526 .....                                 | 110         | AR-0014 .....                              | 45             |
| AO-0527 .....                                 | 110         | Array microphones .....                    | 24             |
| AO-0528 .....                                 | 110         | Artificial ears .....                      | 56             |
| AO-0531 .....                                 | 45, 107     | Artificial mastoid .....                   | 54, 55, 56, 59 |
| AO-0534 .....                                 | 110         | Artificial mastoid with calibrator .....   | 59             |
| AO-0536 .....                                 | 111         | Audibility threshold .....                 | 137            |
| AO-0537 .....                                 | 44          | Audiometer testing .....                   | 55             |
| AO-0563 .....                                 | 44          | Automotive crash test accelerometers ..... | 156            |
| AO-0564 .....                                 | 44          | Automotive testing .....                   | 84             |
| AO-0587 .....                                 | 44          | A-weighting filters .....                  | 129            |
| AO-0608 .....                                 | 112         | ÆX-9133 .....                              | 101            |
| AO-0612 .....                                 | 112         |  |                |
| AO-0616 .....                                 | 112         | <b>B</b>                                   |                |
| AO-0623 .....                                 | 112         | B types .....                              | 157            |
| AO-0624 .....                                 | 112         | Background noise .....                     | 137            |
| AO-0638 .....                                 | 109         | Beeswax .....                              | 101, 103       |
| AO-0641 .....                                 | 109         | Bending radius .....                       | 105            |
| AO-0642 .....                                 | 109         | Binaural microphone .....                  | 28, 29         |
| AO-0645 .....                                 | 43          | Bird spike .....                           | 49             |
| AO-0687 .....                                 | 44, 106     | Blocks .....                               | 95             |
| AO-0688 .....                                 | 111         | Bone conduction threshold values .....     | 59             |
| AO-0690 .....                                 | 110         | Brackets .....                             | 95             |
| AO-0691 .....                                 | 108         | Brüel & Kjær transducer history .....      | 5              |
| AO-0692 .....                                 | 106         | B-weighting filters .....                  | 129            |
| AO-0693 .....                                 | 110         |  |                |
| AO-0694 .....                                 | 111         | <b>C</b>                                   |                |
| AO-0695 .....                                 | 108         | Cable                                      |                |

|                                     |              |  |          |
|-------------------------------------|--------------|--|----------|
| length .....                        | 47           | Cement studs .....                           | 97, 103  |
| limitations .....                   | 47           | Certification .....                          | 2        |
| Cable accessories .....             | 114          | ISO/IEC 17025 .....                          | 134      |
| Cable adaptor .....                 | 51           | Channel control .....                        | 128      |
| Cable bending radius .....          | 47           | Charge accelerometers .....                  | 69, 155  |
| Cable connecting/removal tool ..... | 101          | industrial .....                             | 156      |
| Cable length .....                  | 40           | maximum cable length .....                   | 105      |
| Cable markers .....                 | 114          | triaxial .....                               | 75, 156  |
| Cable mounting tool .....           | 114          | uniaxial .....                               | 72, 155  |
| Cable splitter .....                | 111          | Charge amplifier .....                       | 137      |
| Cables                              |              | Charge amplifiers .....                      | 126, 127 |
| for accelerometers .....            | 105          | Charge converter .....                       | 137      |
| for hydrophones .....               | 33           | Charge injection calibration .....           | 42, 128  |
| for microphones .....               | 43           | Charge signal conditioners .....             | 126      |
| for triaxial accelerometers .....   | 110          | Charge to CCLD converters .....              | 127      |
| for uniaxial accelerometers .....   | 106          | CIC .....                                    | 42, 128  |
| hardline .....                      | 113          | CIC adaptor .....                            | 51       |
| how to use .....                    | 105          | Classical preamplifier .....                 | 34       |
| industrial applications .....       | 112          | Click-on coupler .....                       | 58       |
| insulation material .....           | 115          | Clip for holding coupler .....               | 66       |
| insulator .....                     | 105          | Clip for holding reference microphone .....  | 66       |
| jacket .....                        | 105          | Clip mounting .....                          | 92       |
| jacket material .....               | 115          | Coaxial cable assemblies .....               | 106, 110 |
| maximum length .....                | 105          | Coaxial connectors .....                     | 47       |
| raw .....                           | 46, 115, 117 | Cold temperatures .....                      | 17       |
| sheathing material .....            | 115          | Collar for acoustic coupler .....            | 60       |
| standard length .....               | 105          | Comparison calibration system software ..... | 132      |
| Calibration .....                   | 2, 133       | Comparison tables                            |          |
| accelerometers .....                | 119          | CCLD accelerometers .....                    | 157      |
| accredited .....                    | 134          | charge accelerometers .....                  | 155      |
| adaptors .....                      | 39           | microphones .....                            | 153      |
| initial .....                       | 134          | piezoresistive accelerometers .....          | 163      |
| microphone .....                    | 37           | Complex intensity .....                      | 137      |
| reference equipment .....           | 134          | Compliance with standards .....              | 143      |
| regular .....                       | 134          | Conditioning .....                           | 137      |
| traceable .....                     | 134          | Conditioning amplifiers .....                | 123      |
| Calibration accessories .....       | 121          | Conditioning monitoring accelerometers ..... | 117      |
| Calibration clip .....              | 93           | Connectors .....                             | 114      |
| Calibration exciter .....           | 94, 120, 121 | Constant current line drive .....            | 137      |
| Calibration fixture .....           | 121          | Contact-free target detection .....          | 86       |
| Calibration jig .....               | 62           | Controllable turntable .....                 | 67       |
| Calibration systems .....           | 120, 131     | Converters                                   |          |
| primary .....                       | 131          | charge to CCLD .....                         | 127      |
| secondary .....                     | 132          | Converting acceleration .....                | 129      |
| Calibrators .....                   | 37, 120      | Corrector .....                              | 48       |
| CCLD .....                          | 137          | for microphones .....                        | 48       |
| CCLD accelerometers .....           | 4, 69, 157   | Coupler adaptor ring .....                   | 56       |
| cables .....                        | 110          | Coupler hole ring .....                      | 65       |
| industrial .....                    | 81, 159      | Couplers .....                               | 22, 56   |
| maximum cable length .....          | 105          | click-on .....                               | 58       |
| triaxial .....                      | 82, 160      | selecting .....                              | 53       |
| uniaxial .....                      | 76, 157      | Cumulative distribution .....                | 138      |
| CCLD laser tacho probe .....        | 86           | Current limitations .....                    | 47       |
| CCLD preamplifiers .....            | 16, 34       | Curved mounting surfaces .....               | 103      |
| CCLD signal conditioners .....      | 124, 125     | Customer care .....                          | 133      |



|  |             |  |                    |
|--|-------------|--|--------------------|
| Customization of transducers .....           | 4           | Diffuse-field microphones .....        | 21                 |
| C-weighting filters .....                    | 129         | Dimensions .....                       | 144                |
| <b>D</b>                                     |             | accelerometers .....                   | 147                |
| DA-0150 .....                                | 62          | microphones .....                      | 144                |
| Damping .....                                | 138         | Direct mounting adaptor .....          | 96                 |
| Danish Primary Laboratory of Acoustics ..... | 119, 134    | Directivity calibration software ..... | 131                |
| DB-0111 .....                                | 56          | Directivity factor .....               | 138                |
| DB-0138 .....                                | 56          | Directivity measurement .....          | 55                 |
| DB-0264 .....                                | 39          | Displacement .....                     | 138                |
| DB-0375 .....                                | 48          | Displacement measurement .....         | 86                 |
| DB-0544 .....                                | 100         | Distortion limit .....                 | 16                 |
| DB-0742 .....                                | 56          | Double integration filters .....       | 129                |
| DB-0843 .....                                | 56          | DP-0276 .....                          | 57                 |
| DB-0900 .....                                | 39          | DP-0286 .....                          | 57                 |
| DB-0913 .....                                | 56          | DP-0368 .....                          | 57                 |
| DB-0962 .....                                | 56          | DP-0370 .....                          | 57                 |
| DB-1021 .....                                | 56          | DP-0530 .....                          | 57                 |
| DB-1160 .....                                | 60          | DP-0774 .....                          | 39                 |
| DB-1164 .....                                | 60          | DP-0775 .....                          | 39                 |
| DB-1425 .....                                | 88, 97, 100 | DP-0776 .....                          | 39                 |
| DB-2012 .....                                | 57          | DP-0888 .....                          | 39                 |
| DB-2015 .....                                | 57          | DP-0977 .....                          | 39                 |
| DB-2902 .....                                | 64          | DP-0978 .....                          | 39                 |
| DB-3041 .....                                | 88          | DP-0979 .....                          | 39                 |
| DB-3339 .....                                | 65          | DPLA .....                             | 119, 134           |
| DB-3340 .....                                | 65          | DS-0535 .....                          | 57                 |
| DB-3611 .....                                | 50          | DS-0540 .....                          | 57                 |
| DB-3800 .....                                | 61          | DS-0541 .....                          | 57                 |
| DB-3800-W-001 .....                          | 61          | DS-0884 .....                          | 65                 |
| DB-3866 .....                                | 58          | DS-0934 .....                          | 49                 |
| DB-3868 .....                                | 58          | DU-0079 .....                          | 101                |
| DB-3869 .....                                | 58          | Dual preamplifier .....                | 29, 30             |
| DB-3887 .....                                | 58          | Dummy accelerometers .....             | 94                 |
| DB-3989 .....                                | 101         | Dust protector .....                   | 57                 |
| DB-4009 .....                                | 39          | Dusty areas .....                      | 74, 81, 89         |
| DB-4010 .....                                | 39          | DV-0459 .....                          | 92, 93             |
| DB-4121 .....                                | 39          | DV-0460 .....                          | 92, 93             |
| DB-4199 .....                                | 39          | D-weighting filters .....              | 129                |
| DB-4339 .....                                | 61          | Dynamic capability .....               | 138                |
| DC response .....                            | 138         | Dynamic pressure .....                 | 19                 |
| DC response accelerometers .....             | 95, 109     | Dynamic range .....                    | 138                |
| DC RMS output .....                          | 129         | Dynamic range of microphones .....     | 16                 |
| DC static centring unit .....                | 90          | DZ-9566 .....                          | 48                 |
| DD-0413 .....                                | 50          | DZ-9769 .....                          | 64                 |
| Decibel scale .....                          | 138         | DZ-9770 .....                          | 64                 |
| Dehumidifier .....                           | 50          | <b>E</b>                               |                    |
| DeltaTron .....                              | 69, 138     | EA-MLA .....                           | 134                |
| Depolarize .....                             | 70          | Ear mould holder .....                 | 57                 |
| Development and production .....             | 2           | Ear mould simulator .....              | 57, 58, 64         |
| Differential amplifier .....                 | 109         | Ear mounting tool .....                | 64                 |
| Differentiation .....                        | 138         | Ear plug simulator .....               | 58                 |
| Diffraction .....                            | 138         | Ear simulator .....                    | 53, 55, 57, 60, 65 |
| Diffuse field .....                          | 15, 23, 138 | external .....                         | 57                 |
| Diffuse sound .....                          | 138         | Earcap .....                           | 56                 |

|  |                    |
|--|--------------------|
| Effects of temperature .....           | 17, 70             |
| EL-2019 .....                          | 101                |
| EL-2330 .....                          | 101                |
| EL-4023 .....                          | 45                 |
| EL-4025 .....                          | 46                 |
| Electroacoustic standards .....        | 143                |
| Electroacoustic testing .....          | 53                 |
| Electroacoustics                       |                    |
| typical system configurations .....    | 54                 |
| Electronic filters .....               | 103                |
| Electrostatic actuators .....          | 39                 |
| adaptors .....                         | 39                 |
| EN 9100 certified .....                | 2                  |
| Engineering test services .....        | 133                |
| ETFE cables .....                      | 115, 117           |
| EU-4000 .....                          | 48                 |
| Excitation .....                       | 138                |
| Exciters .....                         | 90                 |
| calibration .....                      | 121                |
| hand-held .....                        | 91                 |
| vibration .....                        | 91                 |
| Explosive areas .....                  | 74, 81, 112        |
| Extension cables .....                 | 43                 |
| Extension rods .....                   | 48                 |
| External ear simulator .....           | 57                 |
| <b>F</b>                               |                    |
| Falcon Range .....                     | 18, 35             |
| Far field .....                        | 138                |
| FEP cables .....                       | 46, 115            |
| Ferromagnetic surfaces .....           | 103                |
| Fibre adaptor .....                    | 86                 |
| Filters .....                          | 128, 129, 138      |
| electronic .....                       | 103                |
| mechanical .....                       | 97, 103            |
| Flexible adaptors .....                | 48                 |
| Flexible cables .....                  | 115                |
| Flush mounting kit .....               | 17                 |
| Force transducers .....                | 87, 88             |
| Forced vibration .....                 | 138                |
| Free field .....                       | 15, 23, 138        |
| Free-field microphones .....           | 19                 |
| Frequency range .....                  | 72                 |
| lower limiting of accelerometers ..... | 70                 |
| upper limiting of accelerometers ..... | 70                 |
| Frequency response .....               | 138                |
| Frequency response function .....      | 138                |
| Front-end support .....                | 3                  |
| Full scale .....                       | 70                 |
| <b>G</b>                               |                    |
| g, definition of .....                 | 139                |
| General purpose accelerometers .....   | 155, 156, 158, 160 |
| General purpose microphones .....      | 153                |
| Global field service .....             | 133                |

|  |                            |
|--|----------------------------|
| gn .....   | 139                        |
| Ground loop .....                                | 139                        |
| cause .....                                      | 103                        |
| Grounding terminal .....                         | 51                         |
| Guard ring adaptor .....                         | 56                         |
| <b>H</b>   |                            |
| Hand adaptor .....                               | 96                         |
| Hand-arm transducer set .....                    | 96                         |
| Hand-arm vibration .....                         | 95                         |
| Hand-held analyzer .....                         | 28, 29, 111, 112, 123, 124 |
| Hand-held calibration exciter .....              | 120                        |
| Hand-held exciter .....                          | 91                         |
| Hand-held probe .....                            | 104                        |
| Handle adaptor .....                             | 96                         |
| Handset alignment rods .....                     | 65                         |
| Handset gauge .....                              | 65                         |
| Handset positioner .....                         | 64                         |
| Hardline cables .....                            | 113, 117                   |
| Hardware maintenance .....                       | 135                        |
| Harmonics .....                                  | 139                        |
| Harsh environments .....                         | 106, 112, 113              |
| HATS .....                                       | 28, 54, 55, 63             |
| HDPE cables .....                                | 115                        |
| Head and torso simulators .....                  | 28, 54, 55, 63             |
| Headphone testing .....                          | 55                         |
| Headset testing .....                            | 55                         |
| Hearing aid testing .....                        | 55                         |
| Hearing loss .....                               | 139                        |
| Hertz .....                                      | 139                        |
| Hexagonal key .....                              | 101                        |
| High humidity measurements .....                 | 89                         |
| High shock transducer calibration software ..... | 132                        |
| High sound pressure level microphones .....      | 153                        |
| High temperatures .....                          | 17, 70                     |
| High vacuum environments .....                   | 107, 109, 114              |
| High wind speeds .....                           | 49                         |
| High-frequency accelerometers .....              | 155, 158                   |
| High-frequency microphones .....                 | 153                        |
| High-intensity testing .....                     | 31                         |
| High-leak pinna simulator .....                  | 60                         |
| High-pass filter .....                           | 139                        |
| High-sensitivity accelerometers .....            | 155, 159                   |
| High-shock transducer calibration .....          | 132                        |
| High-static pressure microphone .....            | 31                         |
| High-temperature accelerometers .....            | 159, 160                   |
| High-temperature clips .....                     | 92                         |
| High-temperature measurements .....              | 74, 81, 95                 |
| High-temperature mounting block .....            | 95                         |
| Hopkinson bar .....                              | 132                        |
| Human body measurements .....                    | 88                         |
| Human body vibration accelerometers .....        | 161                        |
| Human vibration .....                            | 96                         |
| Human vibration analyzer .....                   | 96, 108, 110, 111          |
| Hydrophone calibration system .....              | 131                        |

|                                  |                  |  |                    |
|----------------------------------|------------------|--|--------------------|
| Hydrophone calibrator .....      | 37               | JP-0196 .....                                  | 114                |
| Hydrophones .....                | 31, 32, 46       | Junction unit .....                            | 51                 |
| cables and connectors .....      | 33               |  |                    |
| Hz, definition of .....          | 139              |  |                    |
| <b>I</b>                         |                  | <b>L</b>                                       |                    |
| IEPE .....                       | 139              | Laboratory standard microphones .....          | 27                 |
| IEPE accelerometers .....        | 69               | LAN-XI support .....                           | 3                  |
| ILAC-MRA .....                   | 134              | Laser tacho probe .....                        | 86                 |
| Imaginary intensity .....        | 139              | Laser-interferometric calibration system ..... | 131                |
| Impact caps .....                | 101              | LDPE cables .....                              | 115                |
| Impact hammers .....             | 87, 88, 89       | Leakage error .....                            | 139                |
| Impact test .....                | 139              | LEMO connector .....                           | 47                 |
| Impact tips .....                | 101              | Level indicator .....                          | 59                 |
| Impedance .....                  | 88, 139          | Level quantity .....                           | 140                |
| Impedance heads .....            | 88               | Limitations to cable length .....              | 47                 |
| Impedance tube microphone .....  | 28               | Linear system .....                            | 140                |
| Industrial accelerometers        |                  | Lip ring .....                                 | 62                 |
| CCLD .....                       | 81, 159, 161     | LIR .....                                      | 141                |
| charge .....                     | 74, 156          | LKO .....                                      | 140                |
| Industrial applications .....    | 112              | LN cables .....                                | 105                |
| Infrasound .....                 | 28, 139          | Loading test object .....                      | 104                |
| Inherent noise .....             | 16               | Local dynamic mass .....                       | 104                |
| Initial calibration .....        | 134              | Loudness .....                                 | 140                |
| Input module .....               | 15               | Loudspeaker testing .....                      | 54                 |
| Insert voltage calibration ..... | 42               | Low noise cables .....                         | 105, 111, 115, 117 |
| Insulated mounting .....         | 103              | Low noise microphones .....                    | 25                 |
| Insulated mounting pads .....    | 103              | Low outgassing .....                           | 115                |
| Insulated studs .....            | 97, 103          | Low sound pressure level microphones .....     | 153                |
| Insulator .....                  | 105, 115         | Low temperatures .....                         | 71                 |
| Integration .....                | 139              | Lower limiting frequency range .....           | 70                 |
| Intensity .....                  | 139              | Low-frequency microphones .....                | 153                |
| Intensity conditioner .....      | 123              | Low-leak pinna simulator .....                 | 60                 |
| ISO 9001 certified .....         | 2                | Low-pass filter .....                          | 140                |
| Isolation .....                  | 139              |  |                    |
| IVC .....                        | 42               | <b>M</b>                                       |                    |
| <b>J</b>                         |                  | Machine health monitoring .....                | 129                |
| Jacket .....                     | 105, 115         | Magnetic fields .....                          | 16                 |
| Jacket material .....            | 115              | Magnetic transducer .....                      | 86                 |
| JJ-0032 .....                    | 51, 114          | Magnets .....                                  | 97                 |
| JJ-0081 .....                    | 48               | Main sensitivity axis .....                    | 104                |
| JJ-0152 .....                    | 114              | Masking .....                                  | 140                |
| JJ-0175 .....                    | 114              | Mastoids .....                                 | 56, 59             |
| JJ-0207 .....                    | 114              | Maximum cable length .....                     | 105                |
| JP-0012 .....                    | 114              | Maximum charge input .....                     | 126                |
| JP-0028 .....                    | 51, 114          | Maximum limits for microphones .....           | 16                 |
| JP-0035 .....                    | 47               | Maximum SPL .....                              | 16                 |
| JP-0056 .....                    | 114              | Maximum transverse sensitivity .....           | 104                |
| JP-0101 .....                    | 47               | Measuring amplifier .....                      | 124, 126           |
| JP-0144 .....                    | 51, 114          | Measuring direction .....                      | 104                |
| JP-0145 .....                    | 51, 60, 107, 114 | Measuring range .....                          | 72                 |
| JP-0162 .....                    | 114              | Mechanical filters .....                       | 97, 103            |
| JP-0169 .....                    | 51               | Mechanical impedance .....                     | 139                |
| JP-0192 .....                    | 114              | Mechanical impedance measurements .....        | 91                 |
|                                  |                  | Mechanical mobility .....                      | 140                |
|                                  |                  | MEMS .....                                     | 69                 |
|                                  |                  | Microdot connector .....                       | 47                 |

|   |               |
|---|---------------|
| Microphone accessories .....                    | 48            |
| Microphone adaptor .....                        | 57, 58        |
| Microphone calibration .....                    | 37, 42        |
| Microphone calibration system .....             | 132           |
| Microphone cartridge .....                      | 16            |
| Microphone comparisons .....                    | 153           |
| Microphone conditioner .....                    | 123           |
| Microphone conditioners .....                   | 124           |
| Microphone dimensions .....                     | 144           |
| Microphone history .....                        | 5             |
| Microphone holder .....                         | 50            |
| Microphone holder for tripod .....              | 50            |
| Microphone matrix .....                         | 15            |
| Microphone pairs .....                          | 29, 30        |
| Microphone preamplifiers .....                  | 34            |
| Microphone reciprocity calibration system ..... | 131           |
| Microphone stand .....                          | 50            |
| Microphone standards .....                      | 19, 143       |
| Microphone testing .....                        | 54            |
| Microphone verification .....                   | 42            |
| Microphones                                     |               |
| selecting .....                                 | 15            |
| Miniature accelerometers .....                  | 155, 158      |
| Miniature transducers .....                     | 107, 109      |
| MM-0002 .....                                   | 86            |
| MM-0004 .....                                   | 86            |
| Mobility .....                                  | 140           |
| Mobility measurements .....                     | 91            |
| Modal accelerometers .....                      | 156, 157, 161 |
| Modal analysis .....                            | 91, 140       |
| Modal exciters .....                            | 87, 90        |
| Modal testing .....                             | 92            |
| Monitoring applications .....                   | 112           |
| Mounted resonance frequency .....               | 72            |
| Mounting .....                                  | 103           |
| considerations .....                            | 103           |
| method .....                                    | 103           |
| position .....                                  | 104           |
| surfaces .....                                  | 103           |
| Mounting blocks .....                           | 95            |
| for human vibration .....                       | 96            |
| high-temperature .....                          | 95            |
| triaxial .....                                  | 95            |
| Mounting brackets .....                         | 95            |
| for human vibration .....                       | 96            |
| Mounting bushing for mouth simulator .....      | 65            |
| Mounting clips .....                            | 92, 93, 103   |
| Mounting pads .....                             | 103           |
| Mouth simulators .....                          | 54, 60, 62    |
| Multi-channel tests .....                       | 128           |
| Multi-field microphones .....                   | 23            |
| Multifunction acoustic calibrator .....         | 37            |
| Multi-pin signal conditioners .....             | 123           |
| Multi-unit frame .....                          | 128           |

|                                     |                          |
|-------------------------------------|--------------------------|
| <b>N</b>                            |                          |
| Near field .....                    | 140                      |
| Newton .....                        | 140                      |
| NEXUS conditioning amplifiers ..... | 3, 35, 45, 123, 124, 127 |
| NMT .....                           | 43                       |
| Noise emission level .....          | 140                      |
| Noise reduction coefficient .....   | 140                      |
| Non-contact transducers .....       | 86                       |
| Nose cones .....                    | 49                       |
| Noy .....                           | 140                      |
| NRC .....                           | 140                      |
| Nuts .....                          | 100                      |

|  |        |
|--|--------|
| <b>O</b>                                 |        |
| Operating temperature range .....        | 72     |
| Optimized microphone .....               | 16     |
| Optional fibre .....                     | 86     |
| Ordering                                 |        |
| accessories .....                        | 4      |
| transducers .....                        | 4      |
| O-rings .....                            | 101    |
| Outdoor microphone kit .....             | 26, 50 |
| Outdoor microphones .....                | 26     |
| Outdoor protection for microphones ..... | 50     |

|   |                       |
|---|-----------------------|
| <b>P</b>                                    |                       |
| Pa, definition of .....                     | 140                   |
| Particle velocity .....                     | 140                   |
| Pascal .....                                | 140                   |
| PE accelerometers .....                     | 69                    |
| industrial .....                            | 156, 159              |
| triaxial .....                              | 75, 156               |
| uniaxial .....                              | 72, 155, 157          |
| PE cables .....                             | 115                   |
| Peak .....                                  | 140                   |
| Peak output .....                           | 129                   |
| Peak-to-peak value .....                    | 140                   |
| Permanent installations .....               | 109                   |
| Permanent magnet .....                      | 103                   |
| Permanent magnet exciters .....             | 90, 91                |
| Permanent monitoring .....                  | 111                   |
| Permanent vibration monitoring .....        | 74, 81                |
| PFA cables .....                            | 17, 46, 105, 115, 117 |
| Phase .....                                 | 140                   |
| Phase mismatch .....                        | 140                   |
| Phase response comparison calibration ..... | 132                   |
| Phon .....                                  | 140                   |
| Photocell tripod .....                      | 50                    |
| Piezoelectric accelerometers .....          | 69                    |
| industrial .....                            | 156, 159              |
| triaxial .....                              | 75, 156               |
| uniaxial .....                              | 72, 155, 157          |
| Piezoelectric force transducers .....       | 87, 88                |
| Piezoelectric material .....                | 70                    |
| Piezoresistive accelerometers .....         | 69, 163               |

|  |   |   |              |
|--|---|---|--------------|
| amplified .....  | 84  | QA-0167 .....                                 | 64           |
| Pink noise .....   | 140                                       | QA-0186 .....                                 | 88           |
| Pinna .....  | 64  | QA-0220 .....                                 | 101, 114     |
| Pinna simulator .....                                      | 60  | QA-0223 .....                                 | 64           |
| Pistonphone .....  | 37  | QA-0230 .....                                 | 101          |
| Plastic microphone dummy .....                             | 62  | QH-0006 .....                                 | 59           |
| Plastic tip .....  | 88  | QS-0003 .....                                 | 101          |
| Point mechanical mobilities .....                          | 88  | QS-0007 .....                                 | 101          |
| Polarization .....   | 15  | QS-0056 .....                                 | 86           |
| Polarization control .....                                 | 128                                       | Qualification of anechoic chambers .....      | 25           |
| Polychloroprene cables .....                               | 46  |   |              |
| Polymers .....   | 88  | <b>R</b>                                      |              |
| POP shock calibrator .....                                 | 132                                       | Rack mounting .....                           | 128          |
| Power amplifier .....                                      | 54, 68, 91                                | Rain cover .....                              | 50           |
| Power spectrum level .....                                 | 140                                       | Random incidence corrector .....              | 48           |
| PR accelerometers .....                                    | 69, 163                                   | Random incidence microphone .....             | 21           |
| amplified .....  | 84  | Random noise .....                            | 141          |
| Preamplifier cables .....                                  | 43  | Raw cables .....                              | 46, 115, 117 |
| Preamplifier holders .....                                 | 50  | Receiver testing .....                        | 54           |
| Preamplifier mounting tool .....                           | 64  | Reciprocity calibration system .....          | 27, 131      |
| Preamplifiers .....  | 34  | Reference accelerometers .....                | 119, 156     |
| Pre-loading nut .....                                      | 88  | Reference instrument calibration .....        | 134          |
| Pressure field .....                                       | 15  | Reference microphone .....                    | 27           |
| Pressure residual intensity index .....                    | 140                                       | Reference microphone holder .....             | 64           |
| Pressure sensors .....                                     | 19  | Reference microphones .....                   | 153          |
| Pressure-field microphones .....                           | 22  | Regular calibration .....                     | 134          |
| Primary calibration .....                                  | 134                                       | Relative velocity .....                       | 141          |
| Primary calibration systems .....                          | 131                                       | Remote control for turntable .....            | 67           |
| Primary laser calibration .....                            | 119                                       | Removal wrench .....                          | 101          |
| Probe microphone .....                                     | 28  | Rentals .....                                 | 135          |
| Probes .....   | 100                                       | Repair service .....                          | 134          |
| Product care .....   | 133                                       | Replacement of discontinued microphones ..... | 18           |
| Protection bracket for external microphone preamplifier .. | 66  | Replacing discontinued preamplifiers .....    | 36           |
| PTFE cables .....  | 105, 115, 117                             | REq-X .....                                   | 70           |
| PULSE audio analyzer .....                                 | 54  | Residual intensity .....                      | 141          |
| PULSE electroacoustics .....                               | 54  | Residual noise .....                          | 141          |
| PULSE multi-analyzer .....                                 | 91  | Residual noise level .....                    | 70           |
| PULSE platform .....                                       | 29, 35, 42, 45, 47, 51, 54, 111, 119, 120 | Resonance .....                               | 141          |
| PULSE support .....  | 3   | Resonance frequency .....                     | 141          |
| PUR cables .....   | 17, 46, 115                               | Retaining collar .....                        | 57           |
| Push/pull stingers .....                                   | 90  | Retroreflective tape .....                    | 86           |
| PVC cables .....   | 46, 115                                   | Reverberation .....                           | 141          |
| PZ23 .....   | 70  | RG-174 .....                                  | 44           |
|  |   | Ring for acoustic coupler .....               | 60           |
| <b>Q</b>   |   | RMS .....                                     | 141          |
| QA testing microphones .....                               | 153                                       | Root mean square .....                        | 141          |
| QA-0013 .....  | 84, 88                                    | Rotating boom .....                           | 50           |
| QA-0029 .....  | 101                                       | Rotor blade measurements .....                | 88           |
| QA-0035 .....  | 114                                       | Rough handling .....                          | 106          |
| QA-0038 .....  | 101                                       | Roving accelerometer .....                    | 103          |
| QA-0041 .....  | 88, 101                                   |   |              |
| QA-0042 .....  | 88, 101                                   | <b>S</b>                                      |              |
| QA-0068 .....  | 101                                       | S types .....                                 | 157          |
| QA-0121 .....  | 101                                       | Sabin .....                                   | 141          |
| QA-0141 .....  | 101                                       | Screws .....                                  | 101          |

|   |                     |  |             |
|---|---------------------|--|-------------|
| Secondary calibration .....                 | 132, 134            | Spanner .....                              | 88          |
| Seismic .....                               | 141                 | Special microphones .....                  | 28          |
| Self-adhesive disc .....                    | 103                 | Spectral leakage .....                     | 139         |
| Semi-anechoic field .....                   | 141                 | Speed measurement .....                    | 86          |
| Sensitivity .....                           | 72, 141             | Spiral cable .....                         | 115         |
| Service .....                               | 133                 | Spirit level .....                         | 94, 103     |
| engineering test .....                      | 133                 | Spring balance .....                       | 59          |
| repair .....                                | 134                 | Stainless steel plug .....                 | 114         |
| Service agreements .....                    | 135                 | Standard .....                             |             |
| Severe vibrational inputs .....             | 84                  | ANSI .....                                 | 143         |
| Sheathing material .....                    | 115                 | ANSI S1.12 Type M .....                    | 19          |
| Shielding .....                             | 141                 | ANSI S1.4 Type 1 .....                     | 19          |
| Shock .....                                 | 141                 | ANSI S1.4 Type 2 .....                     | 19          |
| Shock accelerometers .....                  | 156, 159            | ANSI S3.13 & S.3.26 (1987) .....           | 59          |
| Shock and vibration transducer system ..... | 132                 | ANSI S3.25 .....                           | 63          |
| Shock exciters .....                        | 121                 | ANSI S3.35 .....                           | 61          |
| Shock transducer calibration software ..... | 132                 | ANSI S3.36 .....                           | 63          |
| Signal conditioners .....                   |                     | ANSI S3.7 (1995) .....                     | 56, 58      |
| CCLD .....                                  | 124                 | AS 9100 Rev. C .....                       | 8           |
| charge .....                                | 126                 | BS 4009 .....                              | 59          |
| Signal conditioning .....                   | 123, 137            | compliance .....                           | 143         |
| benefits .....                              | 128                 | electroacoustic .....                      | 143         |
| Silicone cables .....                       | 17, 46              | EN 1032.2003 .....                         | 96          |
| Simulators .....                            | 60                  | EN/IEC 60942 .....                         | 37          |
| ear .....                                   | 56, 57              | EU Directive 2002/44/EC .....              | 96          |
| head and torso .....                        | 63                  | IEC 60318 – 1 .....                        | 56, 60      |
| mouth .....                                 | 62                  | IEC 60318 – 4 .....                        | 61, 63      |
| Single integration filters .....            | 129                 | IEC 60318 – 4 (2010) .....                 | 60          |
| Single point of contact .....               | 133                 | IEC 60318 – 5 .....                        | 56          |
| Slide rule .....                            | 59                  | IEC 60318 – 5 (2006) .....                 | 58          |
| SLM .....                                   | 43, 45, 50, 56, 141 | IEC 60318 – 7 .....                        | 63          |
| SLN cables .....                            | 105                 | IEC 60373 (1990) .....                     | 59          |
| SO-0005 .....                               | 62                  | IEC 60565 .....                            | 131         |
| Soft seal .....                             | 60                  | IEC 61043 .....                            | 29          |
| Sone .....                                  | 141                 | IEC 61043, 1993 Class 1 .....              | 38          |
| Sound calibrator .....                      | 37                  | IEC 61043, Class 1 .....                   | 30          |
| Sound field .....                           | 16                  | IEC 61094 .....                            | 19          |
| Sound intensity .....                       | 24, 30, 141         | IEC 61094 – 1 (2000) .....                 | 143         |
| Sound intensity calibrators .....           | 38                  | IEC 61094 – 1 (Laboratory Standards) ..... | 132         |
| Sound intensity microphones .....           | 153                 | IEC 61094 – 2 .....                        | 131         |
| Sound intensity probes .....                | 29                  | IEC 61094 – 4 (1995) .....                 | 143         |
| remote control unit .....                   | 30                  | IEC 61094 – 4 (Working Standards) .....    | 132         |
| Sound level .....                           | 141                 | IEC 61094 – 5 .....                        | 132         |
| Sound level meter (SLM) .....               | 141                 | IEC 61094 – 6 .....                        | 132         |
| Sound Level Meter Type 2231 .....           | 153                 | IEC 61672 .....                            | 19, 26, 143 |
| Sound level meters .....                    | 25, 43, 45, 50      | IEC 61672 (2000) .....                     | 143         |
| Sound power .....                           | 141                 | IEC 625 – 1 .....                          | 67          |
| Sound power level .....                     | 141                 | IEC/EN 61400 – 11 .....                    | 49          |
| Sound power measurements .....              | 25                  | IEEE 1451.4 .....                          | 3           |
| Sound pressure .....                        | 142                 | IEEE 1451.4 V.1.0 .....                    | 3, 40       |
| Sound pressure level .....                  | 142                 | IEEE 269 .....                             | 62, 63      |
| Sound transmission class .....              | 142                 | IEEE 488.1 .....                           | 67          |
| Sound transmission loss .....               | 142                 | IEEE 661 .....                             | 62, 63      |
| Sound, definition of .....                  | 141                 | IEEE P1451.4 V.0.9 .....                   | 40          |
| Spacer .....                                | 30                  | ISO 10816 .....                            | 129         |

|  |               |   |  |
|--|---------------|---|--|
| ISO 16063 – 11 (1999) .....                  | 131           | Temporary underwater submersion .....         | 106  |
| ISO 16063 – 21 (2003) .....                  | 132           | Test head .....                               | 55   |
| ISO 16063 – 22 .....                         | 132           | Test object loading .....                     | 104  |
| ISO 16063–11, Method 3 .....                 | 119, 120      | Testing and verification .....                | 2  |
| ISO 16063–21 .....                           | 119, 120      | Thermally isolate accelerometer .....         | 71   |
| ISO 17025 .....                              | 120           | Tip mounting screw .....                      | 88   |
| ISO 2631.1 (1997) .....                      | 96            | Titanium microphones .....                    | 16   |
| ISO 5347–3 .....                             | 119           | Tool set .....                                | 114  |
| ISO 5349 .....                               | 96            | Tools .....                                   | 101  |
| ISO 5349.2 (2001) .....                      | 96            | Traceable calibration .....                   | 134  |
| ISO 8041 .....                               | 96            | Transducer applications .....                 | 7  |
| ISO 8041.2005 .....                          | 96            | Transducer calibration .....                  | 2  |
| ITU-T P.51 .....                             | 62            | Transducer customization .....                | 4  |
| ITU-T P.58 .....                             | 65            | Transducer development and production .....   | 2  |
| ITU-T Rec. P.51 .....                        | 63            | Transducer electronic data sheet .....        | 3  |
| ITU-T Rec. P.57 .....                        | 60, 63        | Transducer testing and verification .....     | 2  |
| ITU-T Rec. P.57, Type 1 .....                | 60            | Transducer, definition of .....               | 142  |
| ITU-T Rec. P.57, Type 3.2 .....              | 60            | Transducers                                   |  |
| ITU-T Rec. P.58 .....                        | 63            | for aerospace and defence solutions .....     | 8  |
| ITU-T Rec. P.64 .....                        | 63            | for automotive/ground vehicle solutions ..... | 10   |
| ITU-T Rec. P.76 .....                        | 65            | for telecom and audio solutions .....         | 12   |
| microphone .....                             | 143           | in the measurement chain .....                | 7  |
| OREM A .....                                 | 65            | Transient vibration .....                     | 142  |
| SAE J247 FEB87 .....                         | 31            | Transmitter adaptor .....                     | 56   |
| Standard cable lengths .....                 | 105           | Transverse direction .....                    | 104  |
| Standing wave .....                          | 142           | Triaxial accelerometers                       |  |
| STC .....                                    | 142           | cables .....                                  | 110  |
| Steel tip .....                              | 88            | CCLD .....                                    | 82, 160                                    |
| Stinger accessory kit .....                  | 88            | charge .....                                  | 75, 156                                    |
| Structural accelerometers .....              | 156, 157, 161 | Triaxial mounting block .....                 | 95   |
| Structural dynamic testing .....             | 87            | Triaxial, definition of .....                 | 142  |
| Structural testing kit .....                 | 88            | Triboelectric noise .....                     | 142  |
| Studs .....                                  | 97            | cause .....                                   | 105  |
| mounting .....                               | 103           | Trigger .....                                 | 142  |
| Super low noise cables .....                 | 105, 109, 115 | Trigger for tachometer .....                  | 86   |
| Support feet .....                           | 64            | Tube stud .....                               | 57   |
| Surface microphones .....                    | 45            | Tube stud for ITES .....                      | 58   |
| Swan neck .....                              | 17            | Turbulence screen .....                       | 48   |
| Swivel bases .....                           | 92, 93, 103   | Turntable .....                               | 131  |
| System configurations                        |               | Turntable cable .....                         | 67   |
| for electroacoustic applications .....       | 54            | Turntable controller .....                    | 67   |
| <b>T</b>                                     |               | Turntable system .....                        | 54, 55, 67                                 |
| Tap .....                                    | 101           | Type 2231 .....                               | 153  |
| Technical support .....                      | 133           | Type 2236 .....                               | 50   |
| TEDS .....                                   | 3, 4, 128     | Type 2250 .....                               | 25, 26, 28, 43, 45, 50, 111, 112, 123, 124 |
| microphones .....                            | 40            | Type 2260 .....                               | 50   |
| templates .....                              | 35, 40        | Type 2270 .....                               | 25, 26, 28, 29, 43, 45, 50, 111, 112       |
| TEDS templates .....                         | 4             | Type 3505 .....                               | 59   |
| Telephone test heads .....                   | 54, 63, 65    | Type 3639 .....                               | 43   |
| Telephone testing .....                      | 55, 60, 63    | Type 3923 .....                               | 50   |
| Temperature .....                            | 17, 70        | Type numbers .....                            | 4  |
| Temperature coefficient .....                | 17            | <b>U</b>                                      |  |
| Temperature coefficient of sensitivity ..... | 70            | UA- 1407 .....                                | 93   |
| Temperature range .....                      | 40            | UA-0023 .....                                 | 39   |

|               |             |               |                |
|---------------|-------------|---------------|----------------|
| UA-0033 ..... | 39          | UA-1193 ..... | 97, 99         |
| UA-0035 ..... | 41, 48, 145 | UA-1206 ..... | 65             |
| UA-0036 ..... | 48          | UA-1210 ..... | 65             |
| UA-0078 ..... | 102         | UA-1218 ..... | 102            |
| UA-0122 ..... | 17, 48      | UA-1221 ..... | 98             |
| UA-0123 ..... | 17, 48      | UA-1243 ..... | 114            |
| UA-0125 ..... | 102         | UA-1244 ..... | 114            |
| UA-0130 ..... | 114         | UA-1251 ..... | 50             |
| UA-0146 ..... | 102         | UA-1260 ..... | 48             |
| UA-0160 ..... | 22, 40, 48  | UA-1281 ..... | 97, 99         |
| UA-0186 ..... | 51, 114     | UA-1284 ..... | 50             |
| UA-0196 ..... | 17, 48      | UA-1304 ..... | 60             |
| UA-0207 ..... | 49          | UA-1305 ..... | 60             |
| UA-0237 ..... | 49          | UA-1317 ..... | 50             |
| UA-0245 ..... | 114         | UA-1370 ..... | 66             |
| UA-0247 ..... | 59          | UA-1375 ..... | 66             |
| UA-0253 ..... | 49          | UA-1376 ..... | 66             |
| UA-0254 ..... | 49          | UA-1400 ..... | 65             |
| UA-0258 ..... | 101         | UA-1401 ..... | 65             |
| UA-0262 ..... | 59          | UA-1404 ..... | 18, 26, 49, 50 |
| UA-0265 ..... | 97          | UA-1405 ..... | 51             |
| UA-0283 ..... | 95          | UA-1407 ..... | 92             |
| UA-0308 ..... | 50          | UA-1408 ..... | 92             |
| UA-0355 ..... | 49          | UA-1417 ..... | 94             |
| UA-0385 ..... | 49          | UA-1418 ..... | 94             |
| UA-0386 ..... | 49          | UA-1434 ..... | 48             |
| UA-0387 ..... | 49          | UA-1444 ..... | 97, 99         |
| UA-0393 ..... | 50          | UA-1448 ..... | 60             |
| UA-0459 ..... | 49          | UA-1473 ..... | 92             |
| UA-0469 ..... | 49          | UA-1474 ..... | 92             |
| UA-0553 ..... | 97, 99      | UA-1475 ..... | 92, 93         |
| UA-0587 ..... | 50          | UA-1478 ..... | 92, 93         |
| UA-0588 ..... | 50          | UA-1480 ..... | 92, 94         |
| UA-0629 ..... | 102         | UA-1546 ..... | 64             |
| UA-0643 ..... | 97, 99      | UA-1555 ..... | 114            |
| UA-0730 ..... | 114         | UA-1563 ..... | 92, 93         |
| UA-0781 ..... | 49          | UA-1564 ..... | 92, 93         |
| UA-0786 ..... | 48          | UA-1567 ..... | 61             |
| UA-0801 ..... | 50          | UA-1577 ..... | 50             |
| UA-0803 ..... | 50          | UA-1588 ..... | 50             |
| UA-0839 ..... | 49          | UA-1615 ..... | 58             |
| UA-0844 ..... | 102         | UA-1616 ..... | 58             |
| UA-0866 ..... | 97, 99      | UA-1639 ..... | 39             |
| UA-0867 ..... | 97, 99      | UA-1650 ..... | 49             |
| UA-0901 ..... | 62          | UA-1679 ..... | 49, 50         |
| UA-0920 ..... | 51          | UA-1700 ..... | 49             |
| UA-0954 ..... | 48          | UA-1701 ..... | 49             |
| UA-0989 ..... | 50          | UA-1707 ..... | 50             |
| UA-1043 ..... | 64          | UA-1723 ..... | 114            |
| UA-1070 ..... | 49          | UA-2041 ..... | 58             |
| UA-1071 ..... | 49          | UA-2052 ..... | 97, 100        |
| UA-1075 ..... | 97, 99      | UA-2053 ..... | 101            |
| UA-1079 ..... | 102         | UA-2054 ..... | 97, 100        |
| UA-1110 ..... | 60          | UA-2055 ..... | 101            |
| UA-1192 ..... | 97, 98      | UA-2056 ..... | 97, 98         |



|                                      |                   |   |                 |
|--------------------------------------|-------------------|---|-----------------|
| UA-2057 .....                        | 101               | Velocity .....                                  | 142             |
| UA-2059 .....                        | 101               | Velocity and displacement detection .....       | 86              |
| UA-2060 .....                        | 101               | Velocity measurement .....                      | 86              |
| UA-2061 .....                        | 97, 98            | Vibration definition .....                      | 142             |
| UA-2062 .....                        | 97, 100           | Vibration exciters .....                        | 87, 90, 91, 121 |
| UA-2063 .....                        | 98                | Vibration transducer calibration software ..... | 120             |
| UA-2064 .....                        | 97, 98            | Vibration transducer calibration system .....   | 119, 120, 131   |
| UA-2065 .....                        | 98                |   |                 |
| UA-2066 .....                        | 100               | <b>W</b>  |                 |
| UA-2067 .....                        | 100               | WA-0214 .....                                   | 114             |
| UA-2068 .....                        | 97, 98            | WA-0224 .....                                   | 97, 99          |
| UA-2069 .....                        | 101               | WA-0371 .....                                   | 48              |
| UA-2080 .....                        | 101               | WA-0406 .....                                   | 48              |
| UA-2127 .....                        | 64                | WA-0567 .....                                   | 121             |
| UA-2129 .....                        | 50                | WA-1544 .....                                   | 132             |
| UA-2133 .....                        | 49                | WA-1545 .....                                   | 132             |
| UA-2144 .....                        | 86                | WA-1665 .....                                   | 97, 100         |
| UA-2219 .....                        | 92, 94, 97, 100   | WA-1666 .....                                   | 97, 100         |
| UA-2220 .....                        | 101               | WA-1667 .....                                   | 97, 100         |
| UA-2221 .....                        | 101               | WA-1668 .....                                   | 97, 100         |
| UA-2222 .....                        | 101               | WA-1705 .....                                   | 114             |
| UA-3014 .....                        | 95                | Waterborne sound transducers .....              | 32              |
| UA-3015 .....                        | 96                | Wavelength .....                                | 142             |
| UA-3016 .....                        | 96                | WB-0850 .....                                   | 51              |
| UA-3017 .....                        | 96                | WB-1254 .....                                   | 67              |
| UC-0195 .....                        | 30                | WB-1372 .....                                   | 125             |
| UC-0196 .....                        | 30                | WB-1418 .....                                   | 31              |
| UC-0199 .....                        | 64                | WB-1419 .....                                   | 31              |
| UC-0205 .....                        | 88                | WB-1421 .....                                   | 51              |
| UC-0210 .....                        | 39                | WB-1452 .....                                   | 51              |
| UC-0211 .....                        | 28, 41, 145       | WB-1453 .....                                   | 125             |
| UC-0213 .....                        | 49                | Weatherproof microphone .....                   | 26              |
| UC-5269 .....                        | 30                | Weighting network .....                         | 142             |
| UC-5270 .....                        | 30                | Wet areas .....                                 | 74, 81          |
| UC-5290 .....                        | 64                | WH-3315 .....                                   | 25              |
| UC-5322 .....                        | 88                | White noise .....                               | 142             |
| UC-5349 .....                        | 30                | Whole body motion .....                         | 84              |
| UC-5360 .....                        | 49, 50            | Whole body vibration .....                      | 95              |
| UC-5366 .....                        | 61                | Wind tunnel testing .....                       | 49              |
| Ultrasound .....                     | 142               | Windscreen holder .....                         | 49, 50          |
| Underwater accelerometers .....      | 159               | Windscreens .....                               | 49              |
| Underwater cable .....               | 33, 106           | WL-0958 .....                                   | 112             |
| Uni (fine) gain adjustment .....     | 128               | WL-1248 .....                                   | 113             |
| Uniaxial accelerometers              |                   | WL-1260 .....                                   | 46              |
| cables .....                         | 106               | WL-1287 .....                                   | 45              |
| CCLD .....                           | 76, 157           | WL-1302 .....                                   | 25, 35, 45      |
| charge .....                         | 72, 155           | WL-3185 .....                                   | 44              |
| piezoresistive .....                 | 163               | WQ-1099 .....                                   | 49              |
| Uni-Gain .....                       | 72, 142, 155, 157 | WQ-1133 .....                                   | 49              |
| Upper-limiting frequency range ..... | 70                | WQ-2347 .....                                   | 121             |
|                                      |                   | WQ-2842 .....                                   | 49              |
|                                      |                   | WT-9651 .....                                   | 132             |
| <b>V</b>                             |                   |   |                 |
| V types .....                        | 155, 157          | <b>Y</b>  |                 |
| Variable gain .....                  | 155, 157          | YJ-0216 .....                                   | 101             |
| VC-LAN support .....                 | 3                 |   |                 |

|               |            |               |        |
|---------------|------------|---------------|--------|
| YJ-0305 ..... | 56         | YQ-8941 ..... | 101    |
| YJ-0430 ..... | 60         | YQ-9209 ..... | 101    |
| YJ-0431 ..... | 60         | YQ-9215 ..... | 101    |
| YJ-0892 ..... | 60         | YS-0045 ..... | 101    |
| YK-1110 ..... | 101        | YS-0067 ..... | 101    |
| YK-1410 ..... | 101        | YS-0290 ..... | 101    |
| YK-2206 ..... | 101        | YS-0449 ..... | 101    |
| YM-0249 ..... | 88         | YS-0514 ..... | 88     |
| YM-0414 ..... | 88         | YS-0810 ..... | 101    |
| YO-0073 ..... | 101        | YS-0811 ..... | 101    |
| YO-0534 ..... | 88         | YS-8406 ..... | 101    |
| YP-0080 ..... | 100        | YS-9202 ..... | 88     |
| YP-0150 ..... | 88, 97, 98 | YS-9901 ..... | 101    |
| YQ-0093 ..... | 101        |               |        |
| YQ-2003 ..... | 101        | <b>Z</b>      |        |
| YQ-2004 ..... | 88         | ZG-0328 ..... | 51     |
| YQ-2007 ..... | 101        | ZG-0350 ..... | 51, 60 |
| YQ-2960 ..... | 101        | ZG-0426 ..... | 62     |
| YQ-2962 ..... | 88, 101    | ZH-0632 ..... | 30     |
| YQ-8168 ..... | 101        |               |        |

# WANT TO FIND OUT MORE?

## Customer-driven Solutions

Our most important skill is listening to the challenges customers meet in their work processes, where increasing functional demands, time pressures, regulatory requirements and budget constraints mean that getting it right the first time is becoming evermore critical. Receptive dialogue allows us to fully understand specific customer needs and develop long-term sound and vibration solutions.

Over the years, we have developed creative and technically advanced solutions to innumerable customer problems, some of which you can find on our website on: [www.bksv.com/casestudies](http://www.bksv.com/casestudies).

For intriguing features and news related to sound and vibration, you can subscribe to our customer magazine *Waves* on: [www.bksv.com/waves](http://www.bksv.com/waves).

## Events and Training

If you are interested in a more in-depth understanding of any of the solutions and/or applications featured in this catalogue, please consider our specialist courses, events and webinars that go beyond conventional training and give you access to our world-leading knowledge base. Full details of what is available and when can be found on: [www.bksv.com/courses](http://www.bksv.com/courses).

## Near to You

Brüel & Kjær is a global company. We operate through our network of sales offices and representatives in 55 countries. These local teams are supported by our global group of engineering specialists, who can advise on and solve all manner of sound and vibration measurement and analysis problems. To augment our service, we regularly hold local courses and road-shows, and participate in sound- and vibration-focused exhibitions and conferences worldwide.

To contact a salesperson or support staff nearest you, see our list of offices and agents on: [www.bksv.com/contact](http://www.bksv.com/contact).

Who we are



How we can help



[www.bksv.com](http://www.bksv.com)

**Brüel & Kjær Sound & Vibration Measurement A/S**

DK-2850 Nærum · Denmark

Telephone: +45 77 41 20 00 · Fax: +45 45 80 14 05

[www.bksv.com](http://www.bksv.com) · [info@bksv.com](mailto:info@bksv.com)

Local representatives and service organizations worldwide

**Brüel & Kjær**   
BEYOND MEASURE



BF 0256-13 2016-01