

Modal Exciter Type 4824

Modal Excitation System Type 3624

Designed for demanding modal test applications, electrodynamic Modal Exciter Type 4824 provides precise, reliable, stable and long-lasting operation. Highest quality materials, rugged construction and stringent quality control assure a versatile means of modal excitation for any experimental modal test.

Modal Exciter Type 4824 is available as a stand-alone unit – supplied only with the appropriate trunnion and connecting cable – or as a complete system (Type 3624), with matching power amplifier and standard set of stingers and cables.

Optional accessories include traditional push/pull stingers, tension wire stingers, robust lateral modal exciter stands, turnbuckles, cable extension kits, chuck nut assemblies and various adaptors.



Uses and Features

- Uses**
- General mechanical mobility measurements
 - Experimental modal analysis using SISO, MISO, SIMO and MIMO testing techniques
 - Advanced structural dynamics investigations
 - Structural damage detection
 - Finite element model correlation and validation
- Features**
- Force rating 100 N sine
 - 1-inch peak-to-peak displacement for best low-frequency excitation
 - Wide operating frequency range: DC – 5000Hz
 - Through-hole design for choice of tension wire stingers or traditional push/pull stingers
 - Rugged, industrial design
 - High force-to-weight ratio due to rare-earth magnet technology
 - High-rigidity, low-mass magnesium armature for minimized force drop-off at resonance frequencies
 - Compact, lightweight construction providing easy positioning/orientation relative to test object
 - Low stray magnetic field
 - Ideal for any excitation signal (sine, impulse and random signals)
 - Built-in optical sensor for accurate determination of armature position
 - Electronic DC control of tension wire pre-tensioning (optional)
 - Full range of stingers – tension wire technology or traditional push/pull stinger technology (optional)
 - Robust lateral exciter stands for easy positioning and orientation (optional)
 - Can be delivered as a complete turnkey excitation system Type 3624

Description

Based on rare-earth neodymium magnet technology, this modal exciter features small physical dimensions relative to the force rating along with low total weight and a low-mass, high-rigidity, spring-suspended armature. The low armature weight helps to ensure high-quality force measurements by minimizing force drop-offs at the test specimen's resonance frequencies. Four upper radial flexures and four lower radial flexures, the latter providing an additional guide for best stabilization, form a strong rectilinear guidance system which keeps the driver coil perfectly centred in the magnetic assembly's air gap. In the transverse directions and in torsion, the flexure system provides very high stiffness to counteract rotational movement of the test specimen. Also, through this configuration, the modal exciter can absorb high lateral forces without damage to the exciter's internal construction.


The "hole-through" design makes it possible to use tension wire stingers or traditional push/pull stingers with the exciter. Easy and fast attachment of both types of stingers is achieved with the chuck nut assembly (for use with tension wire stingers) or with an M6 to 10–32 UNF threaded insert (for use with push/pull stingers).

Optional Lateral Modal Exciter Stands UA-1607 and UA-1608 can be used with Modal Exciter Type 4824.

In lateral setups of Type 4824, tension wire stingers can easily be mechanically pre-tensioned with the use of Lateral Modal Exciter Stands UA-1607 and UA-1608. For electrical pre-tensioning, especially useful in vertical, skewed excitation setups and for excitation in confined spaces, the optional DC Static Centring Unit Type 1056 can be used. Modal Exciter Type 4824 has a video HR-10 socket that outputs the signal from the built-in optical sensor, providing necessary feedback to the DC Static Centring Unit Type 1056. Traditional push/pull stingers require no pre-tensioning.

Fig. 1 shows the dimensions of Modal Exciter Type 4824.

Fig. 1
Dimensions of
Type 4824 in its
trunnion (in mm)

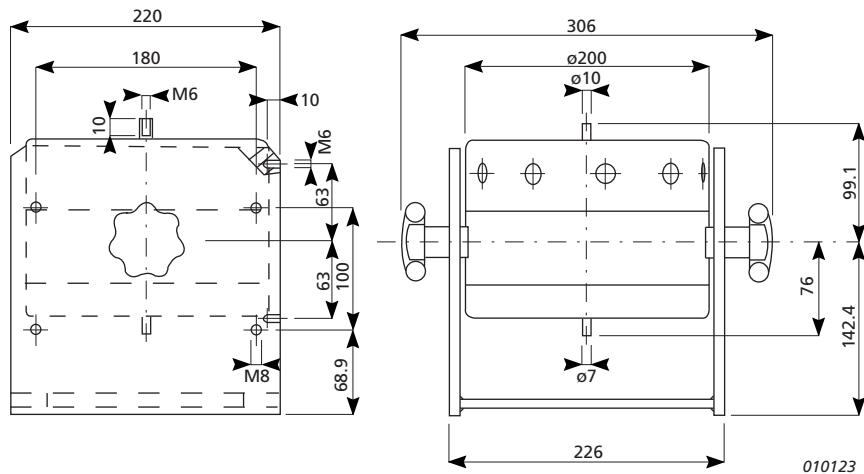

Forced cooling is not required for Type 4824.


Modal Excitation System Type 3624

Type 3624 is a complete turnkey excitation system comprising Modal Exciter Type 4824 with trunnion, matching Power Amplifier Type 2732, stingers and all necessary cables.

Modal Exciter Configurations

See Modal Exciter Configuration Guide (BG 1483) for an overview of modal excitation systems, exciter stands, stingers, tension wires, and force and impedance transducers.

Compliance with Standards

	The CE marking is the manufacturer's declaration that the product meets the requirements of the applicable EU directives RCM mark indicates compliance with applicable ACMA technical standards – that is, for telecommunications, radio communications, EMC and EME China RoHS mark indicates compliance with administrative measures on the control of pollution caused by electronic information products according to the Ministry of Information Industries of the People's Republic of China WEEE mark indicates compliance with the EU WEEE Directive
Temperature	IEC 60068-2-1 & IEC 60068-2-2: Environmental Testing. Cold and Dry Heat. Operating Temperature: 5 to 40 °C (41 to 104 °F) Storage Temperature: -25 to +70 °C (-13 to +158 °F)
Humidity	IEC 60068-2-78: Damp Heat: 90% RH (non-condensing at 40 °C (104 °F)).

Specifications – Modal Exciter Type 4824

Matching Power Amplifier: Type 2732 (120 VA)
Rated Force [sine (peak)/random (RMS)]: 100/70 N (22/15 lbf)
Useful Frequency Range: 2–5000 Hz
Operating Frequency Range: DC–5000 Hz
Max. Rated Travel: 25.4 mm (1 in)
Max. Velocity [sine (peak)/random (RMS)]: 1.5/1.5 m/s (59 in/s)
Max. Acceleration [sine (peak)/random (RMS)]: 432/304 m/s²
(44/31 g)

Rated Current: 5.5 A
Suspension Stiffness: 4 N/mm (23 lbf/in)
Effective Moving Mass: 0.23 kg (8.1 oz)
Main Resonance Frequency: >6000 Hz
Weight with Trunnion: 21 kg (46.3 lb)
Dimensions: See Fig. 1

Ordering Information

Type 4824 Modal Exciter

includes the following:

- AQ-0649: Cable with two 4-pin Neutrik® speakON® plugs, length 5 m (16.4 ft)
- KC-1007: Trunnion
- UA-1612: Three adaptors M6 to 10–32 UNF

Modal Excitation System

Type 3624 Modal Excitation System

includes the following:

- Type 4824: Modal Exciter
- Type 2732: Power Amplifier (120 VA)
- UA-1598: Three Push/Pull Steel Stingers, including:
 - 3 × fastening screws
 - 3 × adaptors, diameter 2.5 mm to 10–32 UNF
 - 3 × steel rods, length 500 mm, diameter 2.5 mm
 - 1 × 2.5 mm collet chuck (chuck nut with collet insert)

Optional Accessories

ELECTRICAL TENSION WIRE PRE-TENSIONING

Type 1056 DC Static Centring Unit

STINGERS, TENSION WIRES AND ACCESSORIES

- UA-1596 Five 2.5 mm Push/Pull Steel Stingers, including:
- 10 × adaptors, diameter 2.5 mm to 10–32 UNF
 - 5 × steel rods, length 200 mm, diameter 2.5 mm
 - 10 × fastening screws
- UA-1597 Five 3.0 mm Push/Pull Steel Stingers, including:
- 10 × adaptors, diameter 3.0 mm to 10–32 UNF
 - 5 × steel rods, length 200 mm, diameter 3.0 mm
 - 10 × fastening screws
- UA-1598 Three 2.5 mm Push/Pull Steel Stingers, including:
- 3 × fastening screws
 - 3 × adaptors, diameter 2.5 mm to 10–32 UNF
 - 3 × steel rods, length 500 mm, diameter 2.5 mm
 - 1 × 2.5 mm collet chuck (chuck nut with collet insert)
- UA-1599 Three 3.0 mm Push/Pull Steel Stingers, including:
- 3 × fastening screws
 - 3 × adaptors, diameter 3.0 mm to 10–32 UNF
 - 3 × steel rods, length 500 mm, diameter 3.0 mm
 - 1 × 3.0 mm collet chuck (chuck nut with collet insert)
- UA-1600 One 0.75 mm Tension Wire, length 5000 mm, including:
- 1 × fastening screw
 - 1 × adaptor, diameter 0.75 mm to 10–32 UNF
 - 1 × 0.75 mm collet chuck (chuck nut with collet insert)
- UA-1601 Three 1.5 mm Tension Wires, length 500 mm, including:
- 3 × fastening screws
 - 3 × adaptors, diameter 1.5 mm to 10–32 UNF
 - 3 × 1.5 mm collet chuck (chuck nut with collet insert)

TRADEMARKS

Neutrik and speakON are registered trademarks of Neutrik AG

Brüel & Kjær reserves the right to change specifications and accessories without notice. © Brüel & Kjær. All rights reserved.

Brüel & Kjær Sound & Vibration Measurement A/S
DK-2850 Nærum · Denmark · Telephone: +45 77 41 20 00 · Fax: +45 45 80 14 05
www.bksv.com · info@bksv.com

Local representatives and service organisations worldwide

UA-1602

Three 0.75 mm Collet Chucks and Adaptors, for tension wires, including:

- 3 × chuck nuts
- 3 × collet inserts, diameter 0.75 mm
- 3 × fastening screws
- 3 × adaptors, diameter 0.75 mm to 10–32 UNF

UA-1603

Three 1.5 mm Collet Chucks and Adaptors, for tension wires, including:

- 3 × chuck nuts
- 3 × collet inserts, diameter 1.5 mm
- 3 × fastening screws
- 3 × adaptors, diameter 1.5 mm to 10–32 UNF

UA-1604

Three 2.5 mm Collet Chucks and Adaptors, for push/pull rods, including:

- 3 × chuck nuts
- 3 × collet inserts, diameter 2.5 mm
- 3 × fastening screws
- 3 × adaptors, diameter 2.5 mm to 10–32 UNF

UA-1606

Five 3.5 mm Nylon Stingers, including:

- 5 × nylon rods, length 200 mm, diameter 3.5 mm
- 10 × fastening screws
- 10 × adaptors, diameter 3.5 mm to 10–32 UNF

FORCE TRANSDUCERS AND IMPEDANCE HEADS

- Type 8230 CCLD Force Transducer (+44/–44 N range)
- Type 8230-001 CCLD Force Transducer (+220/–220 N range)
- Type 8230-002 CCLD Force Transducer (+2200/–2200 N range)
- Type 8230-003 CCLD Force Transducer (+22000/–2200 N range)
- Type 8230-C-003 Charge Force Transducer (+22200/–2200 N range)
- Type 8231-C Charge Force Transducer (+110000/–2200 N range)
- Type 8203 Force Transducer/Impact Hammer
- Type 8001 Impedance Head

THREAD AND BUSHING ADAPTORS

- UA-2052 Set of 10 Stud Adaptors, 10–32 UNF to ¼–28 UNF
- UA-2054 Set of 20 Bushing Adaptors, 10–32 UNF to ¼–28 UNF

CABLE AND HOSE EXTENSIONS

- AQ-0648 Extension Cable with Neutrik speakON 4-pin connector at both ends, 10 m
- AQ-0658 Extension Cable with 9-pin D-sub connector to video HR-10 connector

LATERAL MODAL EXCITER STANDS

- UA-1607 Modal Exciter Stand, height 1.4 m
Mechanical pre-tensioning of tension wire is possible via an adjustable spring
- UA-1608 Modal Exciter Stand, height 2.0 m
Mechanical pre-tensioning of tension wire is possible via an adjustable spring

2014-08

BP1936-13

